

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300006

Luminaire Tested: P3AS17R25W2N902765DE010 E3DLD1GPH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300006  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R25W2N902765DE010 E3DLD1GPH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 5000K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 474.0 lumens  
Efficiency: N/A  
Efficacy: 24.4 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300006  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1GPH\_5000K

### Luminous Intensity Polar Plot

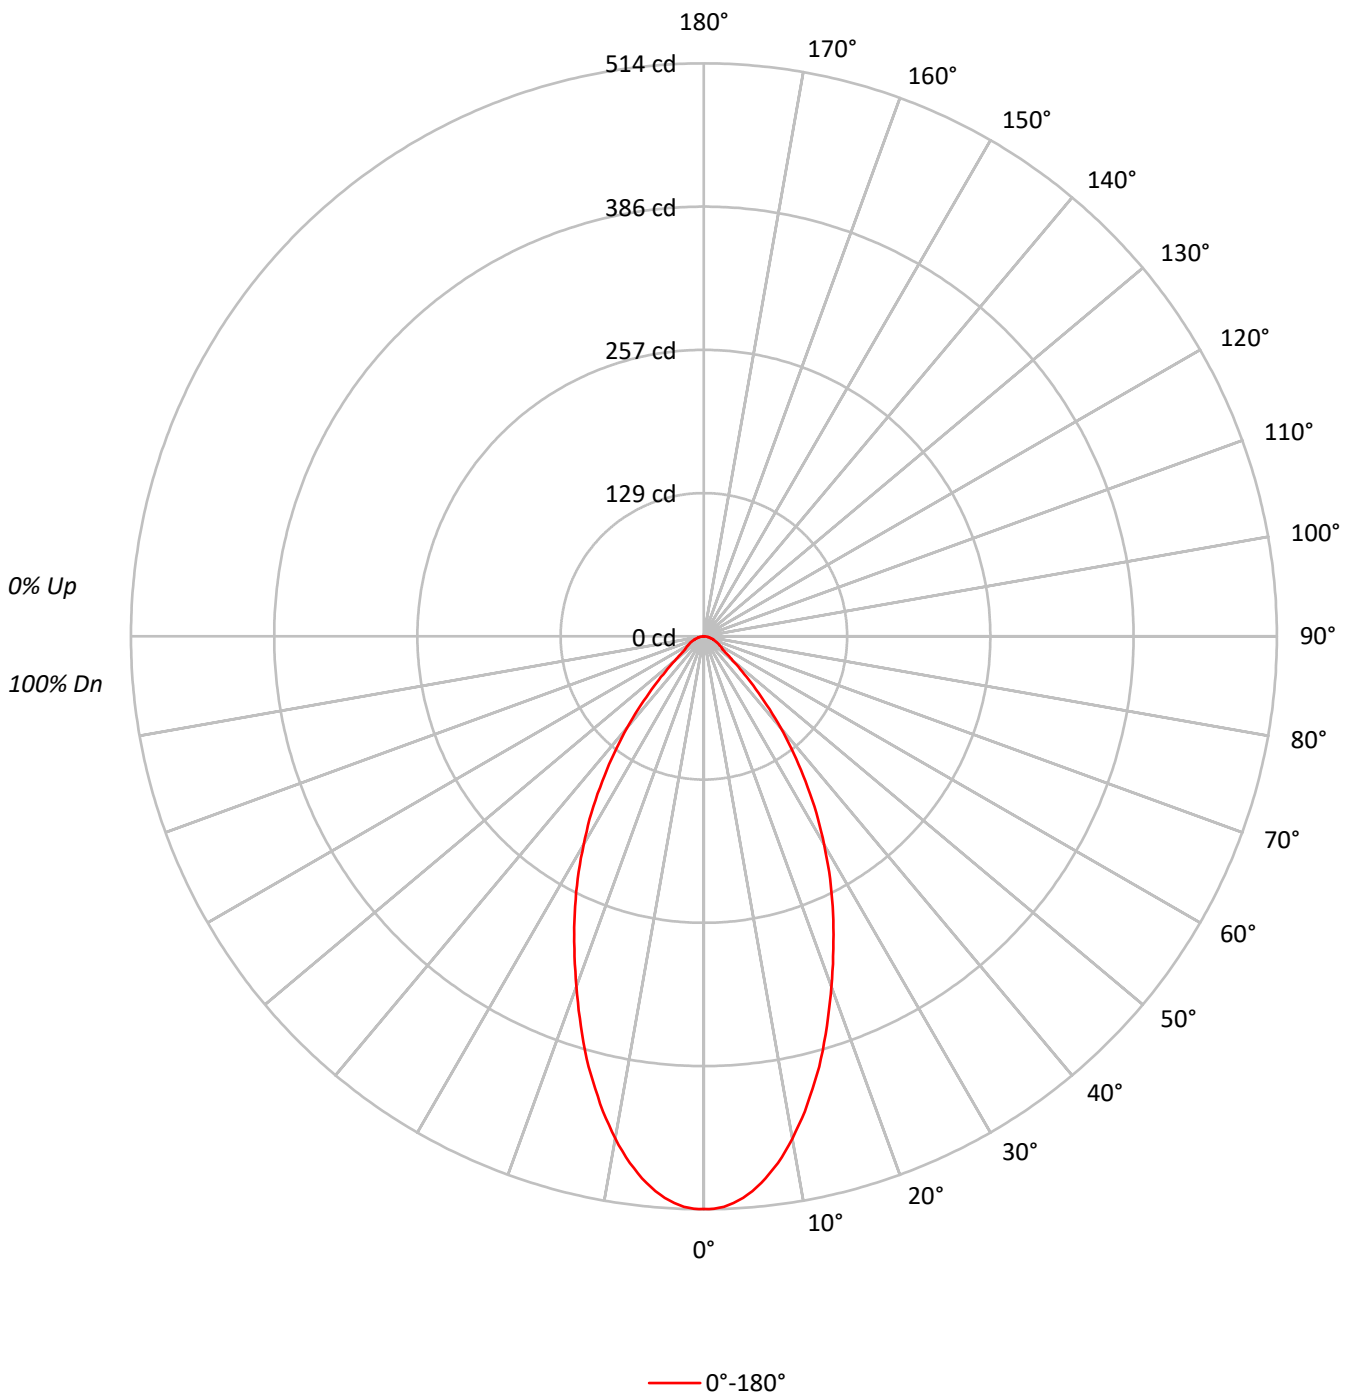





TEST NUMBER: P1300006

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1GPH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	46.3	9.8
10°-20°	111.0	23.4
20°-30°	125.4	26.5
30°-40°	99.2	20.9
40°-50°	50.1	10.6
50°-60°	20.1	4.2
60°-70°	12.8	2.7
70°-80°	7.1	1.5
80°-90°	2.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	282.7	59.6
0°-40°	381.9	80.6
0°-60°	452.1	95.4
0°-90°	474.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	474.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	514	
5°	500	46
15°	400	111
25°	274	125
35°	159	99
45°	63	50
55°	21	20
65°	13	13
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P1300006  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1GPH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	513.7
1°	513.7
2°	512.0
3°	509.0
4°	504.9
5°	499.6
6°	493.1
7°	485.4
8°	477.1
9°	467.7
10°	457.6
11°	446.4
12°	435.8
13°	423.4
14°	411.6
15°	399.8
17.5°	366.7
20°	334.2
22.5°	303.5
25°	274.0
27.5°	245.1
30°	215.5
32.5°	187.8
35°	158.8
37.5°	132.3
40°	106.9
42.5°	83.3
45°	62.6
47.5°	46.6
50°	33.7
52.5°	25.4
55°	20.7
57.5°	18.9
60°	16.5
62.5°	14.8
65°	13.0
67.5°	11.2
70°	9.4
72.5°	8.3
75°	6.5
77.5°	5.3
80°	4.1
82.5°	3.0
85°	1.8
87.5°	0.6



TEST NUMBER: P1300006  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1GPH\_5000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)