

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300024

Luminaire Tested: P3AS17R25W2N902765DE010 E3DLD1MW\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300024  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R25W2N902765DE010 E3DLD1MW\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 5000K CCT AND, 90CRI ,  
E3DLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 967.0 lumens  
Efficiency: N/A  
Efficacy: 49.8 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300024  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1MW\_5000K

### Luminous Intensity Polar Plot

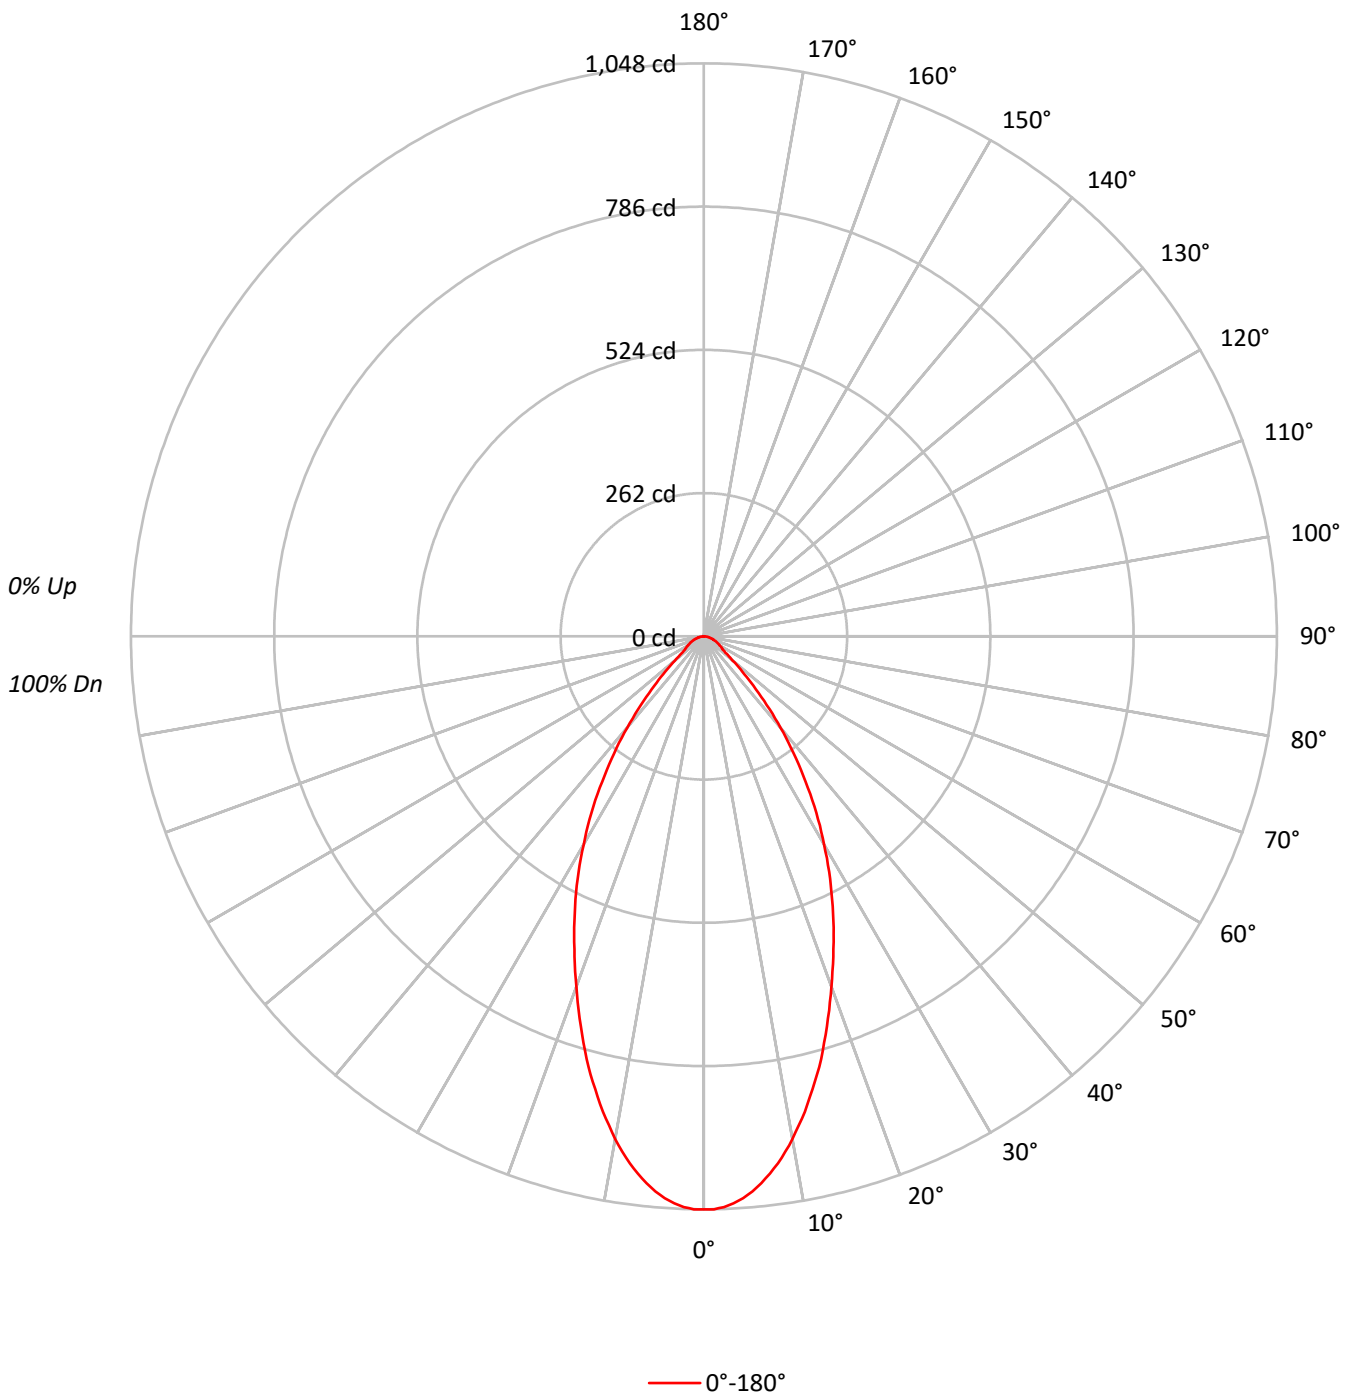



TEST NUMBER: P1300024

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1MW\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91			91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	89	87	85	83			83
3	100	92	87	82	98	91	86	82	88	84	80	86	82	79	83	80	78	76			76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70			70
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64			64
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59			59
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55			55
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51			51
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48			48
10	68	57	51	47	67	57	51	47	56	50	47	55	50	46	54	50	46	45			45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	229828
5°	224345
10°	207879
15°	185154
20°	159100
25°	135250
30°	111334
35°	86759
40°	62403
45°	39601
50°	23436
55°	16133
60°	14780
65°	13750
70°	12374
75°	11268
80°	10607
85°	9057

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 39601 cd/sqm



TEST NUMBER: P1300024

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1MW\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	94.5	9.8
10°-20°	226.4	23.4
20°-30°	255.8	26.5
30°-40°	202.3	20.9
40°-50°	102.2	10.6
50°-60°	40.9	4.2
60°-70°	26.2	2.7
70°-80°	14.5	1.5
80°-90°	4.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	576.7	59.6
0°-40°	779.1	80.6
0°-60°	922.2	95.4
0°-90°	967.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	967.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1048	
5°	1019	95
15°	816	226
25°	559	256
35°	324	202
45°	128	102
55°	42	41
65°	26	26
75°	13	14
85°	4	4
90°	0	



TEST NUMBER: P1300024  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1MW\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1048.1
1°	1048.1
2°	1044.5
3°	1038.4
4°	1030.0
5°	1019.2
6°	1005.9
7°	990.2
8°	973.4
9°	954.1
10°	933.6
11°	910.7
12°	889.1
13°	863.8
14°	839.7
15°	815.6
17.5°	748.1
20°	681.8
22.5°	619.2
25°	559.0
27.5°	499.9
30°	439.7
32.5°	383.1
35°	324.1
37.5°	269.8
40°	218.0
42.5°	169.9
45°	127.7
47.5°	95.2
50°	68.7
52.5°	51.8
55°	42.2
57.5°	38.5
60°	33.7
62.5°	30.1
65°	26.5
67.5°	22.9
70°	19.3
72.5°	16.9
75°	13.3
77.5°	10.8
80°	8.4
82.5°	6.0
85°	3.6
87.5°	1.2



TEST NUMBER: P1300024  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1MW\_5000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)