

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300032

Luminaire Tested: P3AS17R25W2N902765DE010 E3DLD1WMH\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300032  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R25W2N902765DE010 E3DLD1WMH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI ,  
E3DLD1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 869.0 lumens  
Efficiency: N/A  
Efficacy: 44.8 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300032  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1WMH\_2700K

### Luminous Intensity Polar Plot

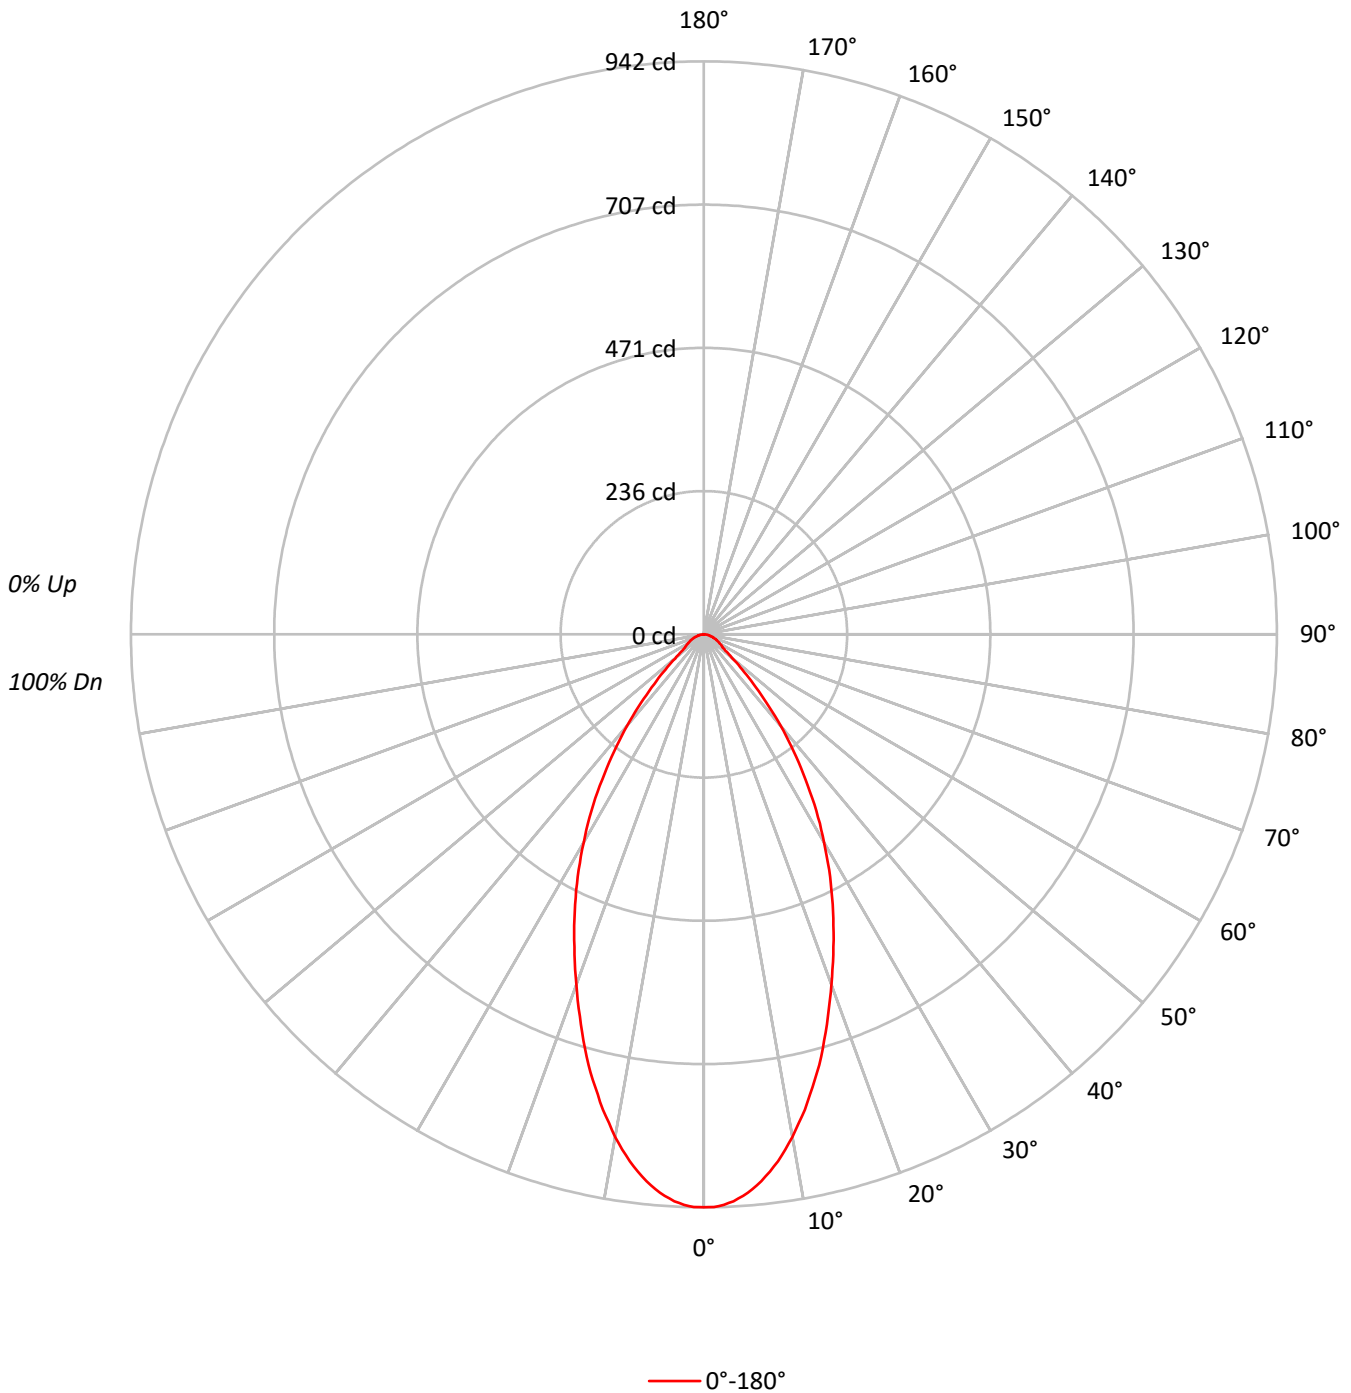



TEST NUMBER: P1300032

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1WMH\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	89	87	85	83			
3	100	92	87	82	98	91	86	82	88	84	80	86	82	79	83	80	78	76			
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70			
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64			
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59			
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55			
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51			
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48			
10	68	57	51	47	67	57	51	47	56	50	47	55	50	46	54	50	46	45			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	206540
5°	201606
10°	186815
15°	166380
20°	142976
25°	121531
30°	100041
35°	77952
40°	56076
45°	35601
50°	21048
55°	14489
60°	13288
65°	12349
70°	11092
75°	10082
80°	9597
85°	8051

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 35601 cd/sqm



TEST NUMBER: P1300032

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1WMH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	84.9	9.8
10°-20°	203.5	23.4
20°-30°	229.9	26.5
30°-40°	181.8	20.9
40°-50°	91.8	10.6
50°-60°	36.8	4.2
60°-70°	23.6	2.7
70°-80°	13.0	1.5
80°-90°	3.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	518.3	59.6
0°-40°	700.1	80.6
0°-60°	828.8	95.4
0°-90°	869.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	869.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	942	
5°	916	85
15°	733	203
25°	502	230
35°	291	182
45°	115	92
55°	38	37
65°	24	24
75°	12	13
85°	3	4
90°	0	



TEST NUMBER: P1300032

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1WMH\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	941.9
1°	941.9
2°	938.6
3°	933.2
4°	925.6
5°	915.9
6°	904.0
7°	889.9
8°	874.7
9°	857.4
10°	839.0
11°	818.4
12°	799.0
13°	776.2
14°	754.6
15°	732.9
17.5°	672.3
20°	612.7
22.5°	556.5
25°	502.3
27.5°	449.3
30°	395.1
32.5°	344.3
35°	291.2
37.5°	242.5
40°	195.9
42.5°	152.6
45°	114.8
47.5°	85.5
50°	61.7
52.5°	46.6
55°	37.9
57.5°	34.6
60°	30.3
62.5°	27.1
65°	23.8
67.5°	20.6
70°	17.3
72.5°	15.2
75°	11.9
77.5°	9.7
80°	7.6
82.5°	5.4
85°	3.2
87.5°	1.1



TEST NUMBER: P1300032  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1WMH\_2700K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)