

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300111

Luminaire Tested: P3AS17R30W2N902750DE010 E3CD1MB\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300111  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R30W2N902750DE010 E3CD1MB\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 5000K CCT AND, 90CRI ,  
E3CD1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1534.0 lumens  
Efficiency: N/A  
Efficacy: 79.1 lumens/watt  
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300111  
CATALOG NUMBER: P3AS17R30W2N902750DE010 E3CD1MB\_5000K

### Luminous Intensity Polar Plot

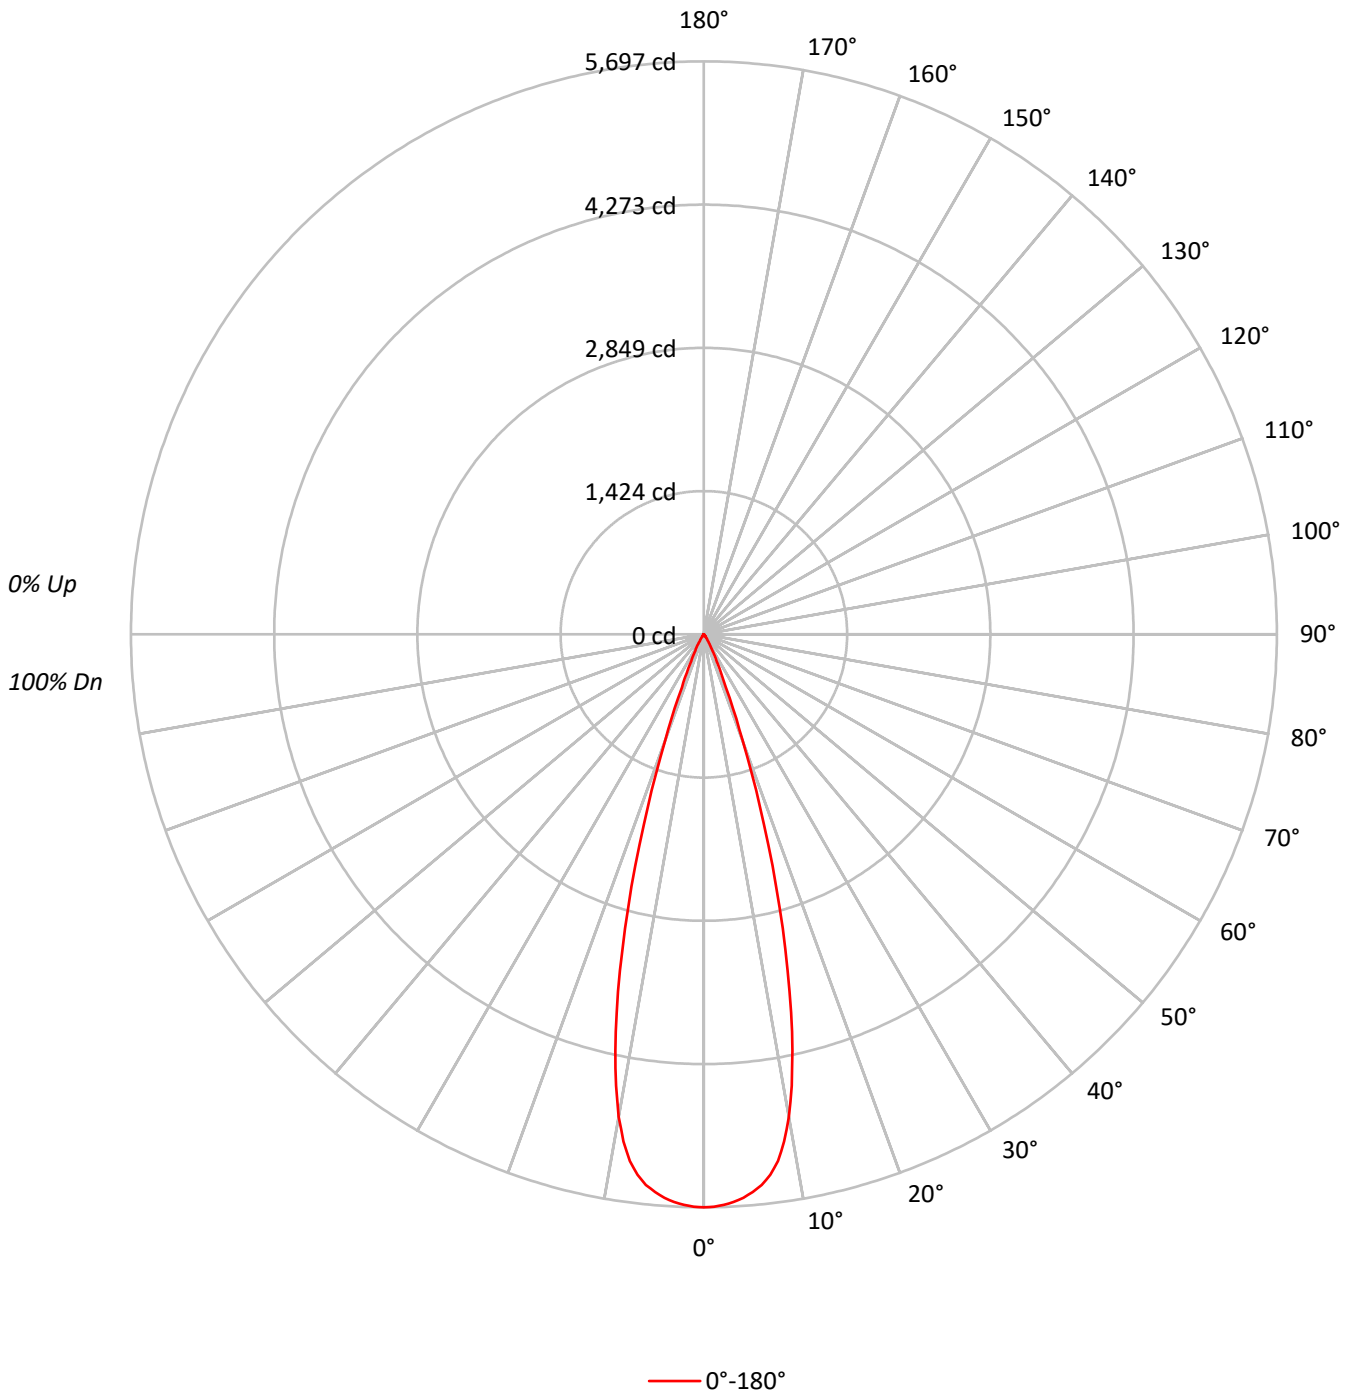



TEST NUMBER: P1300111

CATALOG NUMBER: P3AS17R30W2N902750DE010 E3CD1MB\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	98	96	95	97
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	95	94	92	94
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	93	91	89	91
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	93	91	89	88
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	87	91	88	87	85
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	89	86	84	83
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	86	84	82	81
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	84	82	80	79
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	82	79	77	77
10	89	83	79	76	88	82	78	76	82	78	76	81	78	76	80	77	75	80	77	75	75

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1249198
5°	1225597
10°	1084950
15°	687382
20°	260913
25°	77254
30°	30511
35°	9342
40°	4151
45°	1489
50°	1228
55°	918
60°	1053
65°	1245
70°	769
75°	1017
80°	1515
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 80°  
 Luminance: 1515 cd/sqm



TEST NUMBER: P1300111

CATALOG NUMBER: P3AS17R30W2N902750DE010 E3CD1MB\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	511.8	33.4
10°-20°	797.7	52.0
20°-30°	185.2	12.1
30°-40°	28.7	1.9
40°-50°	4.9	0.3
50°-60°	2.3	0.1
60°-70°	1.9	0.1
70°-80°	1.3	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1494.7	97.4
0°-40°	1523.4	99.3
0°-60°	1530.6	99.8
0°-90°	1534.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1534.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5697	
5°	5568	512
15°	3028	798
25°	319	185
35°	35	29
45°	5	5
55°	2	2
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1300111  
CATALOG NUMBER: P3AS17R30W2N902750DE010 E3CD1MB\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5696.8
1°	5693.2
2°	5677.5
3°	5651.0
4°	5617.3
5°	5567.9
6°	5506.4
7°	5414.8
8°	5289.5
9°	5105.2
10°	4872.6
11°	4572.6
12°	4234.0
13°	3858.1
14°	3444.8
15°	3027.9
17.5°	1980.9
20°	1118.1
22.5°	571.1
25°	319.3
27.5°	196.4
30°	120.5
32.5°	65.1
35°	34.9
37.5°	22.9
40°	14.5
42.5°	8.4
45°	4.8
47.5°	3.6
50°	3.6
52.5°	2.4
55°	2.4
57.5°	2.4
60°	2.4
62.5°	2.4
65°	2.4
67.5°	1.2
70°	1.2
72.5°	1.2
75°	1.2
77.5°	1.2
80°	1.2
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1300111

CATALOG NUMBER: P3AS17R30W2N902750DE010 E3CD1MB\_5000K

CANDELA DISTRIBUTION (continued):

90° |  $\frac{0^\circ}{0.0}$

(END OF REPORT)