

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300172

Luminaire Tested: P3AS17R30W2N902750DE010 E3DL1WMH\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300172  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R30W2N902750DE010 E3DL1WMH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 2700K CCT AND, 90CRI ,  
E3DL1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1146.0 lumens  
Efficiency: N/A  
Efficacy: 59.1 lumens/watt  
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300172  
CATALOG NUMBER: P3AS17R30W2N902750DE010 E3DL1WMH\_2700K

### Luminous Intensity Polar Plot

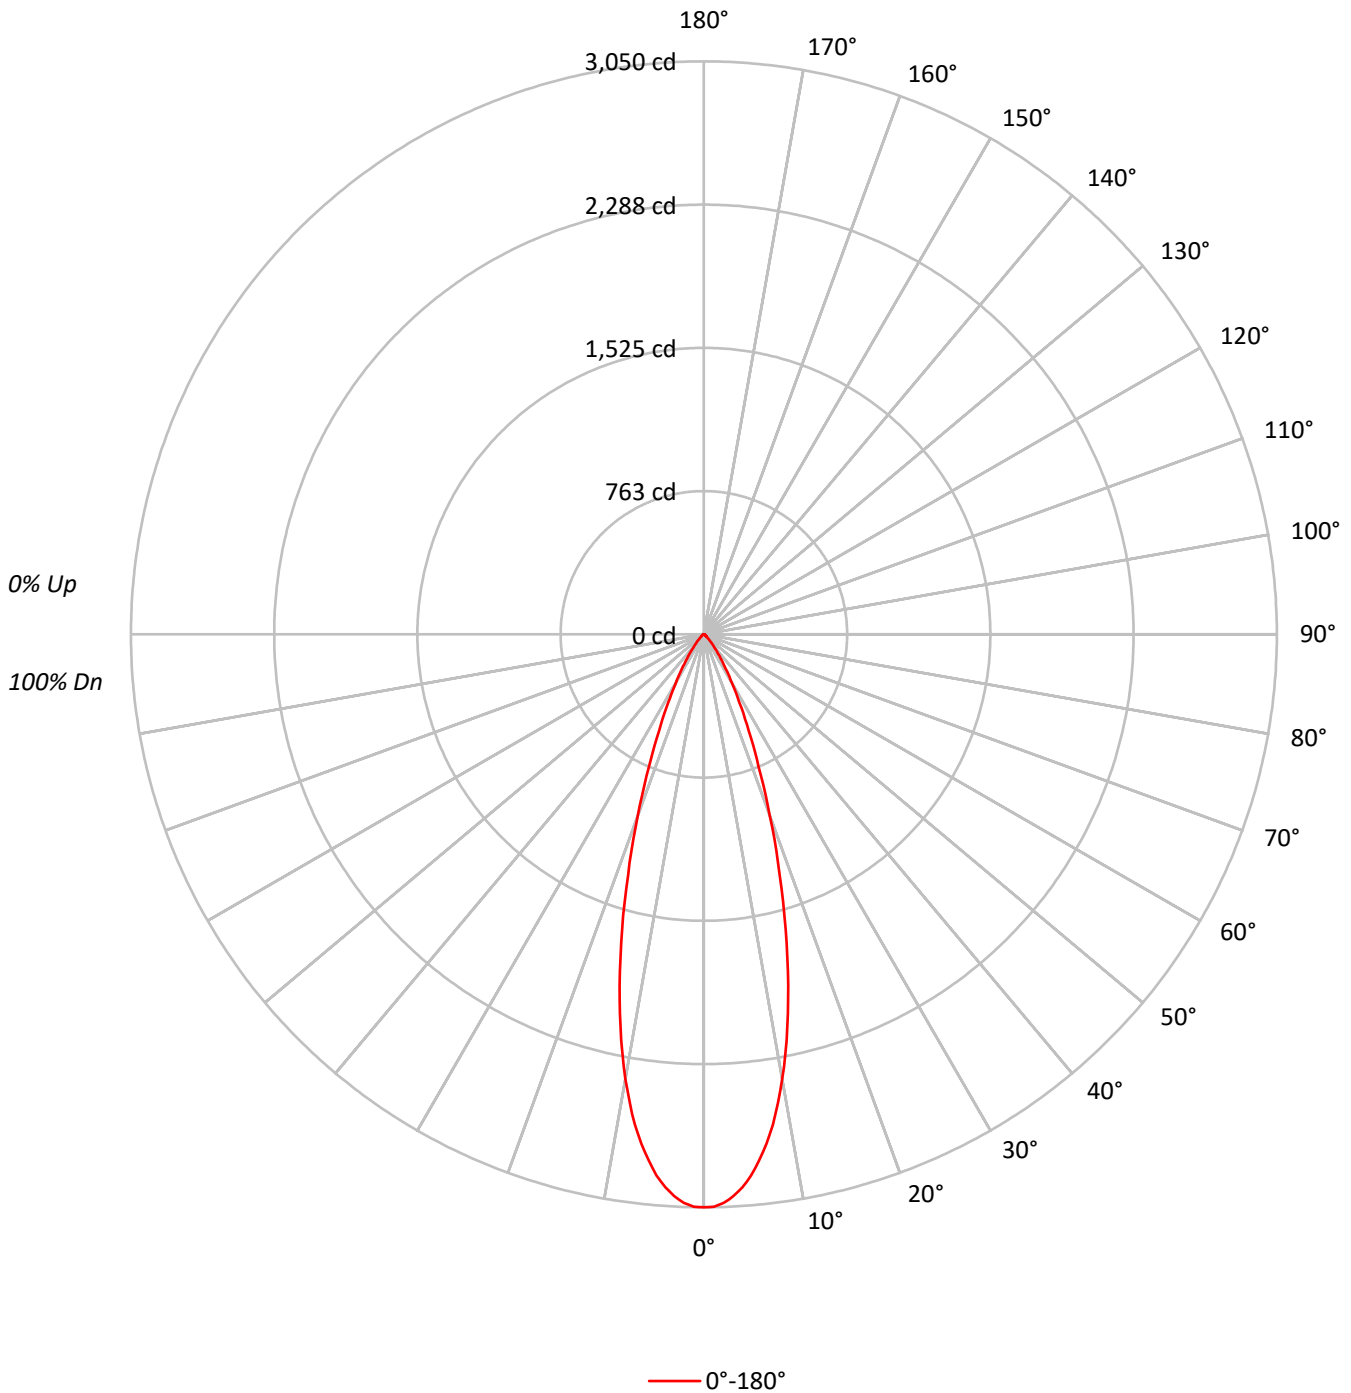



TEST NUMBER: P1300172

CATALOG NUMBER: P3AS17R30W2N902750DE010 E3DL1WMH\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20					
RC	80				70				50				30				10			0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	97	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	93	92	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	91	89	87	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	91	89	87	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	88	85	83	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	85	82	79	78
6	94	86	81	78	92	85	81	77	84	80	77	83	79	76	81	78	76	75	81	78	76	75
7	90	82	77	74	89	82	77	74	81	76	73	80	76	73	79	75	73	71	79	75	73	71
8	87	79	74	71	86	79	74	71	78	73	70	77	73	70	76	72	70	69	76	72	70	69
9	84	76	71	68	83	75	71	68	75	70	67	74	70	67	73	70	67	66	73	70	67	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	63	71	67	65	63

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	668718
5°	636494
10°	535372
15°	386086
20°	239491
25°	136193
30°	75657
35°	41144
40°	21698
45°	11753
50°	6277
55°	4129
60°	3815
65°	3943
70°	3462
75°	2711
80°	2778
85°	2768

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11753 cd/sqm



TEST NUMBER: P1300172

CATALOG NUMBER: P3AS17R30W2N902750DE010 E3DL1WMH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	260.4	22.7
10°-20°	462.8	40.4
20°-30°	267.5	23.3
30°-40°	101.5	8.9
40°-50°	31.2	2.7
50°-60°	10.5	0.9
60°-70°	7.1	0.6
70°-80°	3.8	0.3
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	990.7	86.4
0°-40°	1092.2	95.3
0°-60°	1133.8	98.9
0°-90°	1146.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1146.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3050	
5°	2892	260
15°	1701	463
25°	563	267
35°	154	102
45°	38	31
55°	11	10
65°	8	7
75°	3	4
85°	1	1
90°	0	



TEST NUMBER: P1300172  
CATALOG NUMBER: P3AS17R30W2N902750DE010 E3DL1WMH\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3049.6
1°	3047.5
2°	3029.1
3°	2994.4
4°	2951.1
5°	2891.6
6°	2815.8
7°	2731.4
8°	2637.2
9°	2524.6
10°	2404.4
11°	2274.5
12°	2137.0
13°	1993.0
14°	1846.9
15°	1700.7
17.5°	1341.3
20°	1026.3
22.5°	761.1
25°	562.9
27.5°	409.2
30°	298.8
32.5°	215.4
35°	153.7
37.5°	107.2
40°	75.8
42.5°	53.0
45°	37.9
47.5°	26.0
50°	18.4
52.5°	13.0
55°	10.8
57.5°	9.7
60°	8.7
62.5°	7.6
65°	7.6
67.5°	6.5
70°	5.4
72.5°	4.3
75°	3.2
77.5°	3.2
80°	2.2
82.5°	2.2
85°	1.1
87.5°	0.0



TEST NUMBER: P1300172  
CATALOG NUMBER: P3AS17R30W2N902750DE010 E3DL1WMH\_2700K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)