

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300220

Luminaire Tested: P3AS17R30W2N902750DE010 E3DLP1LI\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300220  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R30W2N902750DE010 E3DLP1LI\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 4000K CCT AND, 90CRI ,  
E3DLP1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 782.0 lumens  
Efficiency: N/A  
Efficacy: 40.3 lumens/watt  
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300220  
CATALOG NUMBER: P3AS17R30W2N902750DE010 E3DLP1LI\_4000K

### Luminous Intensity Polar Plot

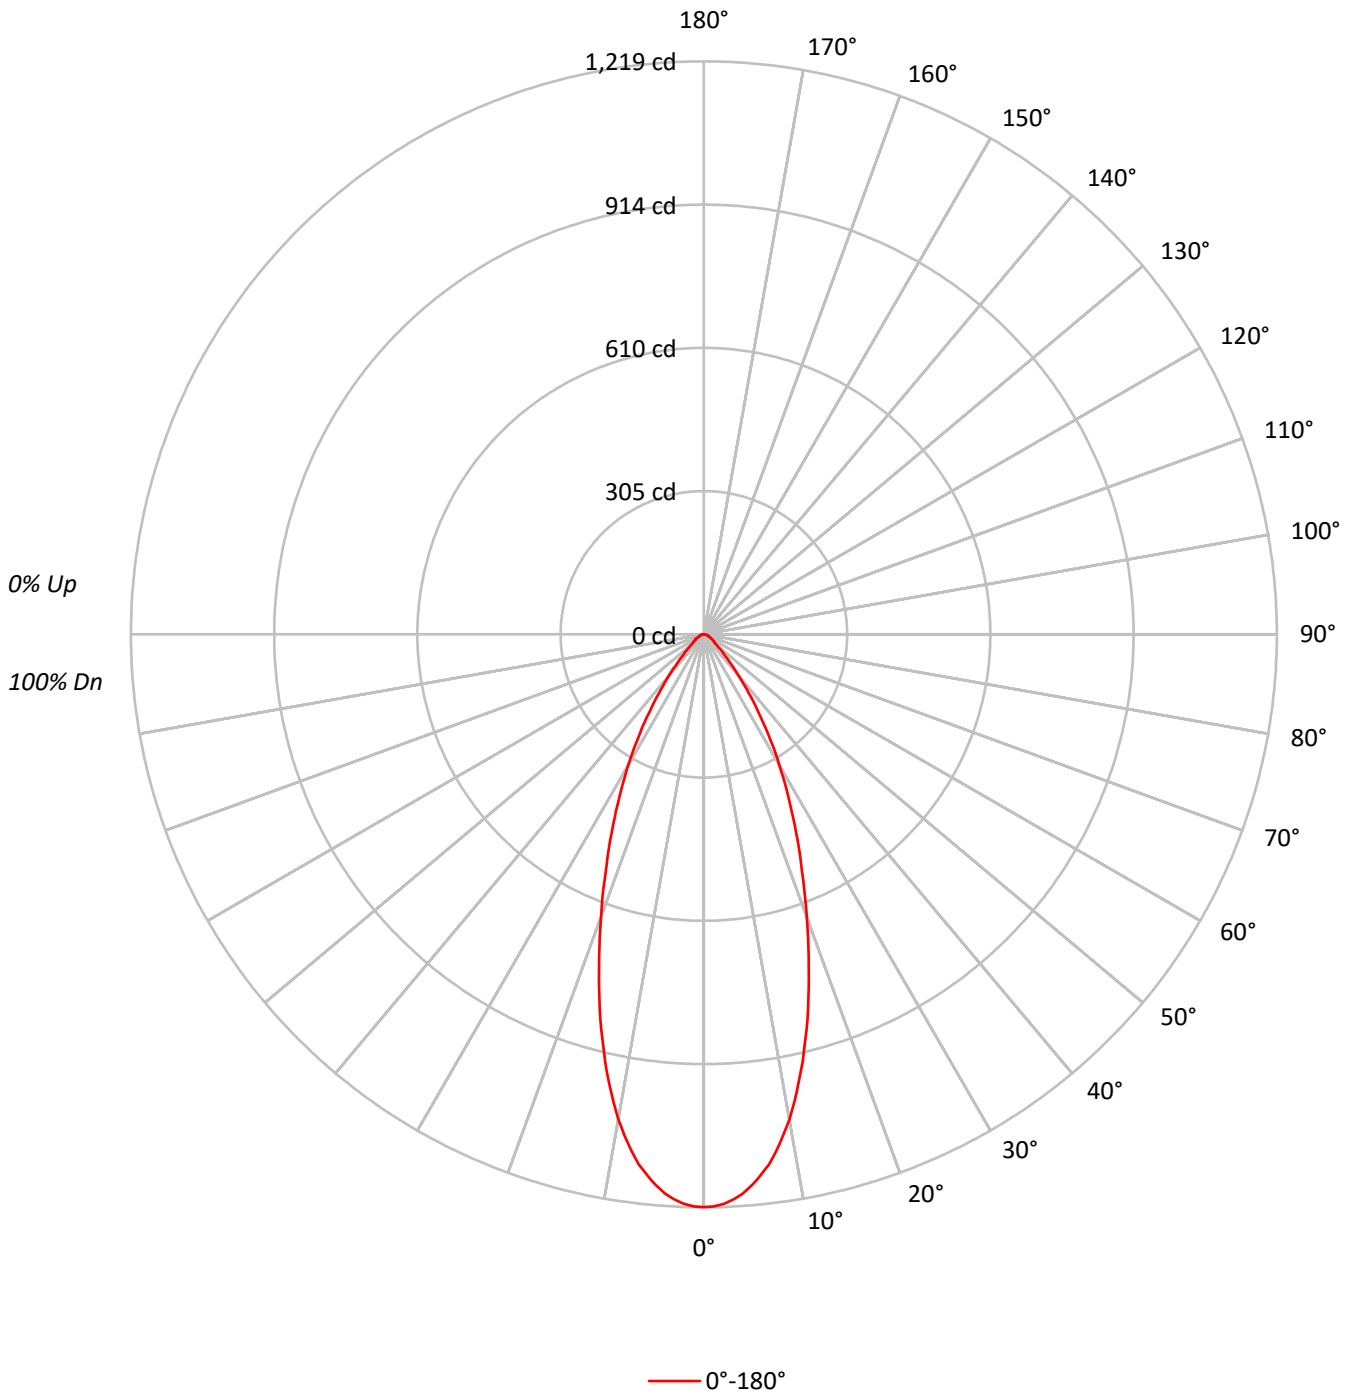



TEST NUMBER: P1300220

CATALOG NUMBER: P3AS17R30W2N902750DE010 E3DLP1LI\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93	
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86	
3	102	95	90	86	100	94	89	85	91	87	84	89	86	83	87	84	82	80	80	80	80	
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74	74	74	74	
5	92	84	78	73	90	83	77	73	81	76	72	79	75	72	78	74	71	70	70	70	70	
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65	65	65	65	
7	83	74	68	64	82	74	68	64	72	67	63	71	67	63	70	66	63	61	61	61	61	
8	80	70	64	60	78	70	64	60	69	63	60	67	63	60	67	62	59	58	58	58	58	
9	76	67	61	57	75	66	60	57	65	60	56	64	60	56	63	59	56	55	55	55	55	
10	73	63	58	54	72	63	57	54	62	57	54	61	57	53	61	56	53	52	52	52	52	

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	267215
5°	258903
10°	233284
15°	192964
20°	149393
25°	112071
30°	81354
35°	54208
40°	33320
45°	19568
50°	12008
55°	9749
60°	8508
65°	6901
70°	6219
75°	6185
80°	4546
85°	6038

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 19568 cd/sqm



TEST NUMBER: P1300220

CATALOG NUMBER: P3AS17R30W2N902750DE010 E3DLP1LI\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	108.2	13.8
10°-20°	234.1	29.9
20°-30°	213.0	27.2
30°-40°	128.8	16.5
40°-50°	51.7	6.6
50°-60°	22.9	2.9
60°-70°	13.8	1.8
70°-80°	7.5	1.0
80°-90°	2.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<b>0°-30°</b>	<b>555.3</b>	<b>71.0</b>
<b>0°-40°</b>	<b>684.1</b>	<b>87.5</b>
<b>0°-60°</b>	<b>758.6</b>	<b>97.0</b>
<b>0°-90°</b>	<b>782.0</b>	<b>100.0</b>
90°-120°	0.0	0.0
90°-150°	0.0	0.0
<b>90°-180°</b>	<b>0.0</b>	<b>0.0</b>
<b>0°-180°</b>	<b>782.0</b>	<b>100.0</b>

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1219	
5°	1176	108
15°	850	234
25°	463	213
35°	202	129
45°	63	52
55°	26	23
65°	13	14
75°	7	8
85°	2	2
90°	0	



TEST NUMBER: P1300220

CATALOG NUMBER: P3AS17R30W2N902750DE010 E3DLP1LI\_4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1218.6
1°	1217.4
2°	1212.6
3°	1204.1
4°	1192.0
5°	1176.2
6°	1156.8
7°	1136.2
8°	1109.5
9°	1079.2
10°	1047.7
11°	1011.3
12°	972.5
13°	933.7
14°	891.2
15°	850.0
17.5°	742.1
20°	640.2
22.5°	545.7
25°	463.2
27.5°	388.0
30°	321.3
32.5°	259.5
35°	202.5
37.5°	155.2
40°	116.4
42.5°	84.9
45°	63.1
47.5°	47.3
50°	35.2
52.5°	27.9
55°	25.5
57.5°	21.8
60°	19.4
62.5°	15.8
65°	13.3
67.5°	12.1
70°	9.7
72.5°	8.5
75°	7.3
77.5°	6.1
80°	3.6
82.5°	2.4
85°	2.4
87.5°	1.2



TEST NUMBER: P1300220  
CATALOG NUMBER: P3AS17R30W2N902750DE010 E3DLP1LI\_4000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)