

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300249

Luminaire Tested: P3AS17R30W2N902750DE010 E3PHLP1MW_3500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300249
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R30W2N902750DE010 E3PHLP1MW_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 3500K CCT AND, 90CRI ,
E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 681.0 lumens
Efficiency: N/A
Efficacy: 35.1 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.67
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300249
CATALOG NUMBER: P3AS17R30W2N902750DE010 E3PHLP1MW_3500K

Luminous Intensity Polar Plot

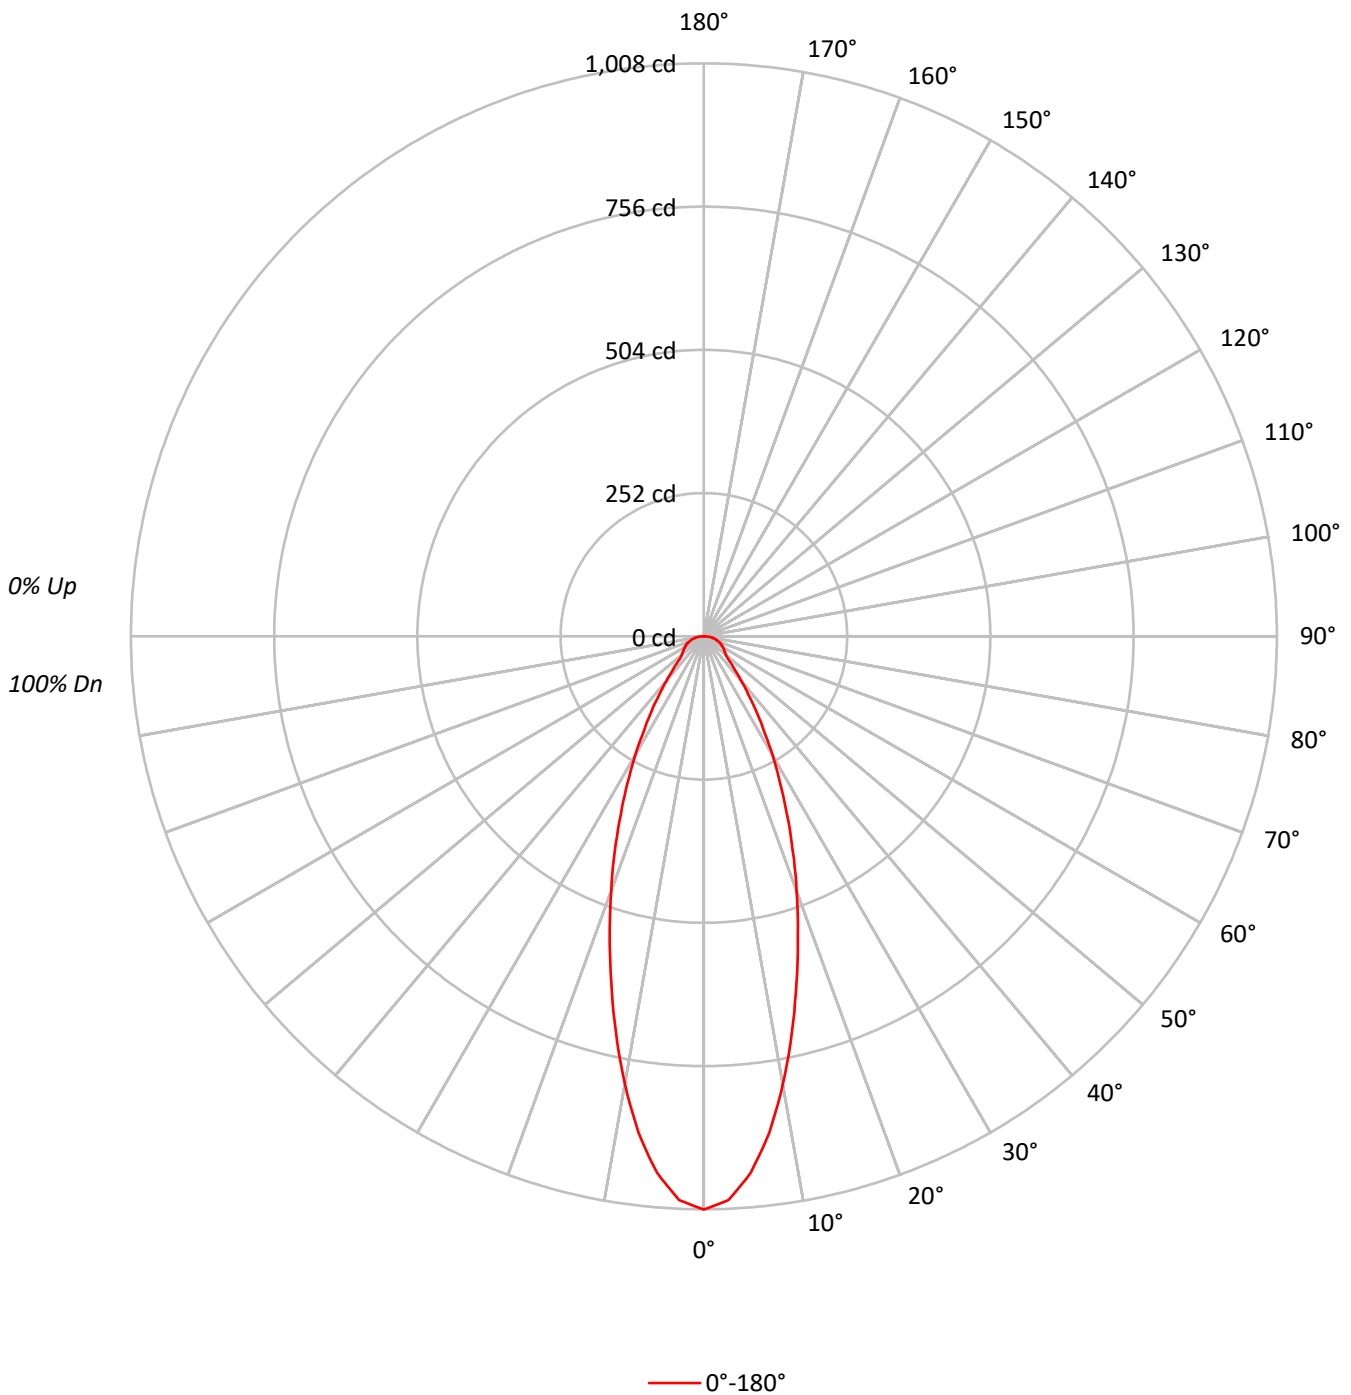



TEST NUMBER: P1300249

CATALOG NUMBER: P3AS17R30W2N902750DE010 E3PHLP1MW_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 112 | 108 | 105 | 102 | 109 | 106 | 103 | 101 | 102 | 100 | 97 | 98 | 96 | 94 | 95 | 93 | 92 | 90 | 90 | 90 | 90 |
| 2 | 105 | 99 | 94 | 90 | 103 | 97 | 93 | 89 | 94 | 90 | 87 | 91 | 88 | 85 | 88 | 85 | 83 | 81 | 81 | 81 | 81 |
| 3 | 99 | 91 | 85 | 80 | 96 | 89 | 84 | 80 | 87 | 82 | 78 | 84 | 80 | 77 | 82 | 79 | 76 | 74 | 74 | 74 | 74 |
| 4 | 93 | 84 | 78 | 73 | 91 | 83 | 77 | 72 | 81 | 76 | 71 | 79 | 74 | 71 | 77 | 73 | 70 | 68 | 68 | 68 | 68 |
| 5 | 88 | 78 | 72 | 67 | 86 | 77 | 71 | 66 | 75 | 70 | 66 | 74 | 69 | 65 | 72 | 68 | 65 | 63 | 63 | 63 | 63 |
| 6 | 83 | 73 | 67 | 62 | 82 | 72 | 66 | 62 | 71 | 65 | 61 | 69 | 64 | 61 | 68 | 64 | 60 | 59 | 59 | 59 | 59 |
| 7 | 79 | 69 | 62 | 57 | 78 | 68 | 62 | 57 | 67 | 61 | 57 | 66 | 60 | 57 | 64 | 60 | 56 | 55 | 55 | 55 | 55 |
| 8 | 75 | 65 | 58 | 54 | 74 | 64 | 58 | 54 | 63 | 57 | 53 | 62 | 57 | 53 | 61 | 56 | 53 | 51 | 51 | 51 | 51 |
| 9 | 72 | 61 | 55 | 51 | 71 | 61 | 55 | 51 | 60 | 54 | 50 | 59 | 54 | 50 | 58 | 53 | 50 | 49 | 49 | 49 | 49 |
| 10 | 68 | 58 | 52 | 48 | 67 | 58 | 52 | 48 | 57 | 51 | 48 | 56 | 51 | 47 | 55 | 51 | 47 | 46 | 46 | 46 | 46 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 221101 |
| 5° | 208496 |
| 10° | 178220 |
| 15° | 142816 |
| 20° | 111333 |
| 25° | 83715 |
| 30° | 61073 |
| 35° | 43045 |
| 40° | 29512 |
| 45° | 21149 |
| 50° | 17296 |
| 55° | 16707 |
| 60° | 16841 |
| 65° | 17226 |
| 70° | 17952 |
| 75° | 19232 |
| 80° | 19826 |
| 85° | 21889 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 82.5°
 Luminance: 23520 cd/sqm



TEST NUMBER: P1300249

CATALOG NUMBER: P3AS17R30W2N902750DE010 E3PHLP1MW_3500K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 85.7 | 12.6 |
| 10°-20° | 174.8 | 25.7 |
| 20°-30° | 159.3 | 23.4 |
| 30°-40° | 101.4 | 14.9 |
| 40°-50° | 54.3 | 8.0 |
| 50°-60° | 39.7 | 5.8 |
| 60°-70° | 33.3 | 4.9 |
| 70°-80° | 23.3 | 3.4 |
| 80°-90° | 9.3 | 1.4 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 419.8 | 61.6 |
| 0°-40° | 521.2 | 76.5 |
| 0°-60° | 615.1 | 90.3 |
| 0°-90° | 681.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 681.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 1008 | |
| 5° | 947 | 86 |
| 15° | 629 | 175 |
| 25° | 346 | 159 |
| 35° | 161 | 101 |
| 45° | 68 | 54 |
| 55° | 44 | 40 |
| 65° | 33 | 33 |
| 75° | 23 | 23 |
| 85° | 9 | 9 |
| 90° | 0 | |



TEST NUMBER: P1300249
CATALOG NUMBER: P3AS17R30W2N902750DE010 E3PHLP1MW_3500K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 1008.3 |
| 2.5° | 992.6 |
| 5° | 947.2 |
| 7.5° | 880.8 |
| 10° | 800.4 |
| 12.5° | 714.7 |
| 15° | 629.1 |
| 17.5° | 550.5 |
| 20° | 477.1 |
| 22.5° | 408.9 |
| 25° | 346.0 |
| 27.5° | 290.1 |
| 30° | 241.2 |
| 32.5° | 195.7 |
| 35° | 160.8 |
| 37.5° | 127.6 |
| 40° | 103.1 |
| 42.5° | 82.1 |
| 45° | 68.2 |
| 47.5° | 55.9 |
| 50° | 50.7 |
| 52.5° | 47.2 |
| 55° | 43.7 |
| 57.5° | 41.9 |
| 60° | 38.4 |
| 62.5° | 36.7 |
| 65° | 33.2 |
| 67.5° | 31.5 |
| 70° | 28.0 |
| 72.5° | 24.5 |
| 75° | 22.7 |
| 77.5° | 19.2 |
| 80° | 15.7 |
| 82.5° | 14.0 |
| 85° | 8.7 |
| 87.5° | 3.5 |
| 90° | 0.0 |

(END OF REPORT)