

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300308

Luminaire Tested: P3AS17R30W2N902765DE010 E3D1WH\_3500K

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300308  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R30W2N902765DE010 E3D1WH\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 3500K CCT AND, 90CRI , E3D1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1530.0 lumens  
Efficiency: N/A  
Efficacy: 78.9 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.47  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300308  
CATALOG NUMBER: P3AS17R30W2N902765DE010 E3D1WH\_3500K

### Luminous Intensity Polar Plot

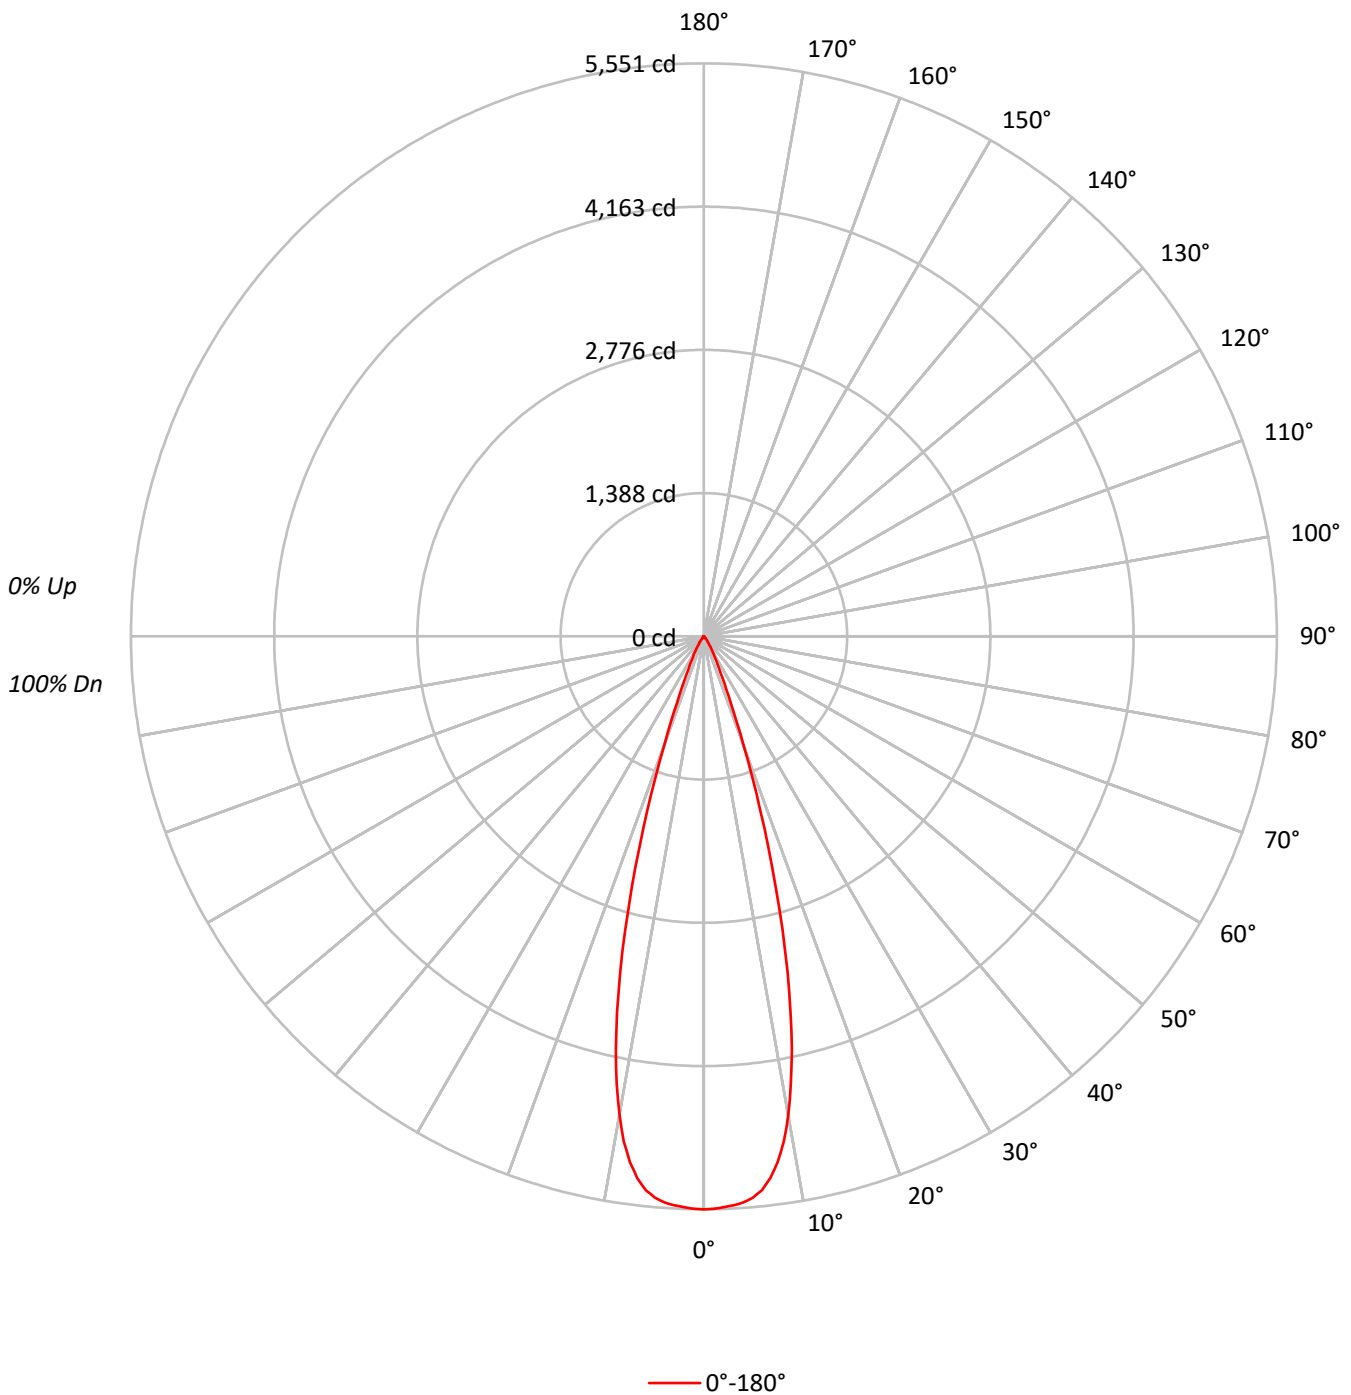





TEST NUMBER: P1300308

CATALOG NUMBER: P3AS17R30W2N902765DE010 E3D1WH\_3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	499.0	32.6
10°-20°	773.9	50.6
20°-30°	199.5	13.0
30°-40°	46.9	3.1
40°-50°	9.1	0.6
50°-60°	1.1	0.1
60°-70°	0.5	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1472.4	96.2
0°-40°	1519.3	99.3
0°-60°	1529.5	100.0
0°-90°	1530.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1530.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5551	
5°	5458	499
15°	2937	774
25°	365	200
35°	70	47
45°	11	9
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1300308  
CATALOG NUMBER: P3AS17R30W2N902765DE010 E3D1WH\_3500K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5551.4
1°	5547.2
2°	5534.2
3°	5519.3
4°	5497.4
5°	5458.2
6°	5394.6
7°	5288.9
8°	5144.6
9°	4956.3
10°	4711.0
11°	4419.4
12°	4101.0
13°	3734.6
14°	3350.9
15°	2937.0
16°	2531.3
17°	2140.5
18°	1765.7
19°	1421.9
20°	1132.0
21°	890.9
22°	700.8
23°	554.7
24°	444.3
25°	364.7
26°	304.1
27°	258.4
28°	223.3
29°	191.2
30°	162.1
32.5°	102.2
35°	69.5
37.5°	43.4
40°	24.9
42.5°	16.6
45°	11.3
47.5°	6.5
50°	3.0
52.5°	1.2
55°	1.2
57.5°	0.6
60°	0.6
62.5°	0.6
65°	0.6



TEST NUMBER: P1300308  
CATALOG NUMBER: P3AS17R30W2N902765DE010 E3D1WH\_3500K

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)