

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300351

Luminaire Tested: P3AS17R30W2N902765DE010 E3DL1WMH\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300351  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R30W2N902765DE010 E3DL1WMH\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 4000K CCT AND, 90CRI ,  
E3DL1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1283.0 lumens  
Efficiency: N/A  
Efficacy: 66.1 lumens/watt  
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300351  
CATALOG NUMBER: P3AS17R30W2N902765DE010 E3DL1WMH\_4000K

### Luminous Intensity Polar Plot

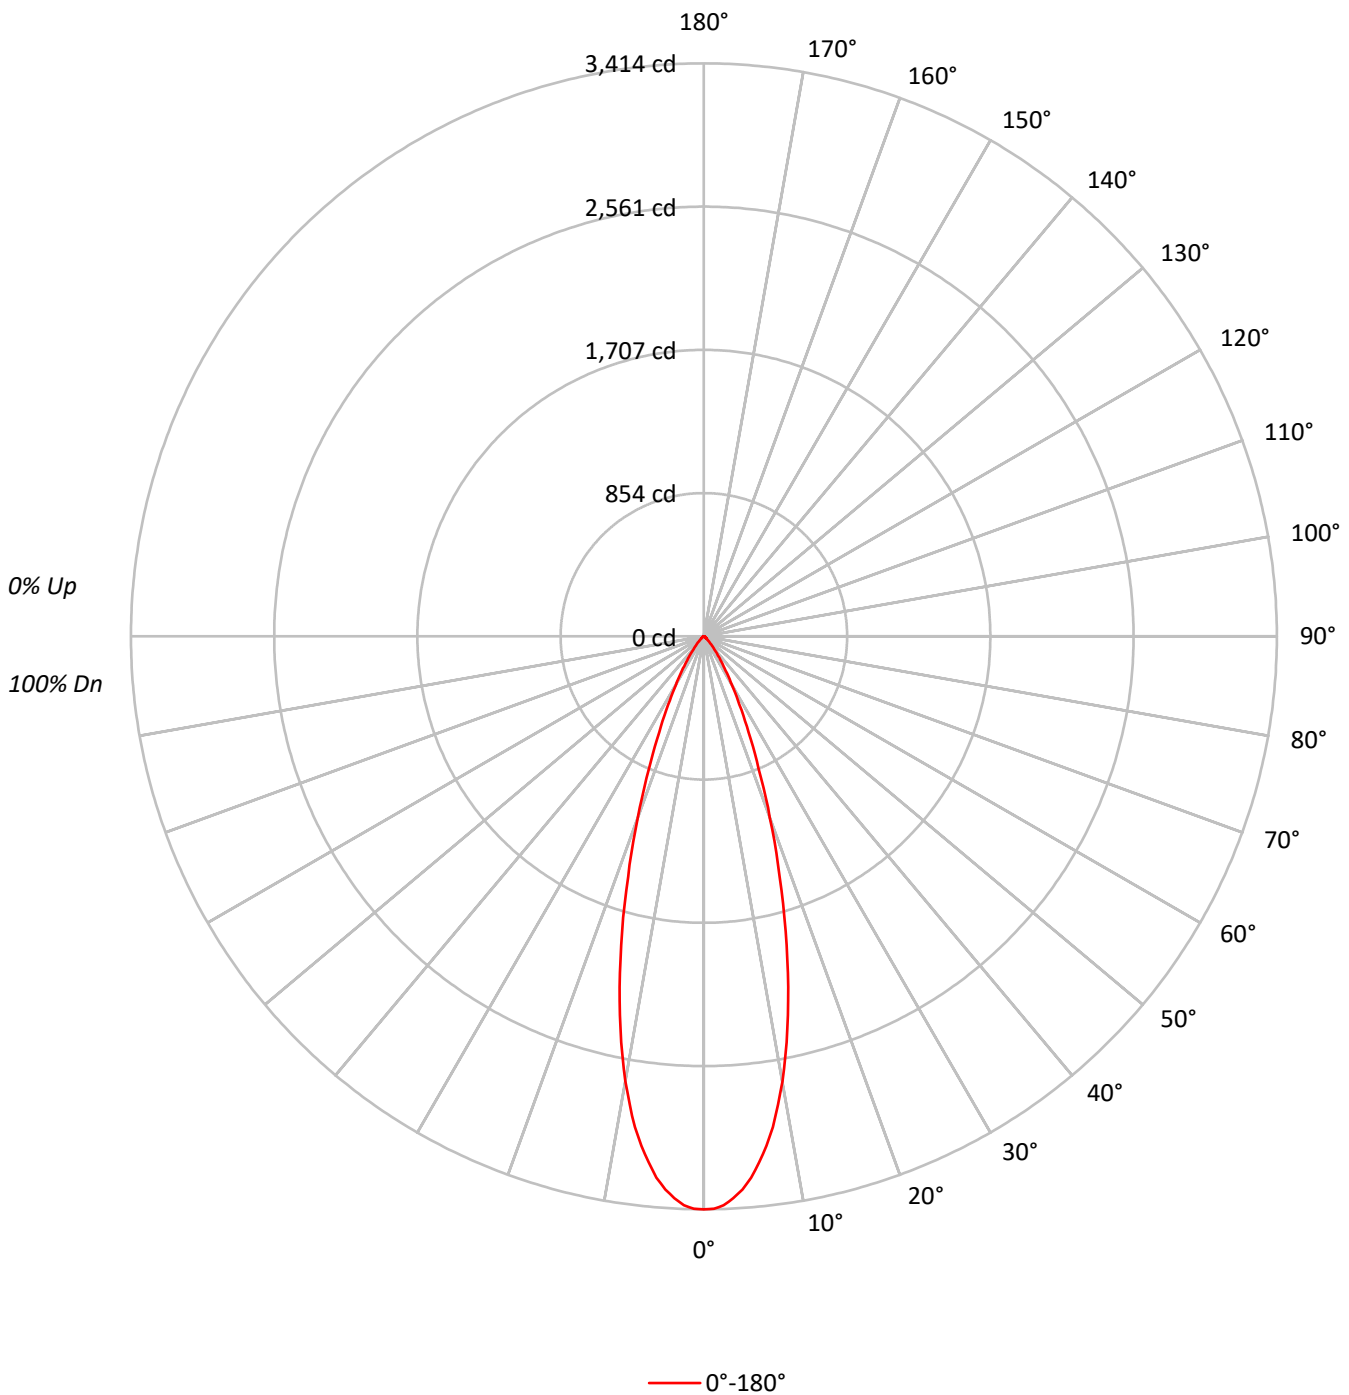





TEST NUMBER: P1300351

CATALOG NUMBER: P3AS17R30W2N902765DE010 E3DL1WMH\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	291.5	22.7
10°-20°	518.2	40.4
20°-30°	299.5	23.3
30°-40°	113.7	8.9
40°-50°	34.9	2.7
50°-60°	11.7	0.9
60°-70°	8.0	0.6
70°-80°	4.3	0.3
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1109.1	86.5
0°-40°	1222.8	95.3
0°-60°	1269.4	98.9
0°-90°	1283.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1283.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3414	
5°	3237	291
15°	1904	518
25°	630	299
35°	172	114
45°	42	35
55°	12	12
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1300351  
CATALOG NUMBER: P3AS17R30W2N902765DE010 E3DL1WMH\_4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3414.2
1°	3411.8
2°	3391.2
3°	3352.4
4°	3303.9
5°	3237.3
6°	3152.4
7°	3057.9
8°	2952.4
9°	2826.4
10°	2691.9
11°	2546.4
12°	2392.5
13°	2231.3
14°	2067.7
15°	1904.1
17.5°	1501.7
20°	1149.0
22.5°	852.0
25°	630.2
27.5°	458.1
30°	334.5
32.5°	241.2
35°	172.1
37.5°	120.0
40°	84.8
42.5°	59.4
45°	42.4
47.5°	29.1
50°	20.6
52.5°	14.5
55°	12.1
57.5°	10.9
60°	9.7
62.5°	8.5
65°	8.5
67.5°	7.3
70°	6.1
72.5°	4.8
75°	3.6
77.5°	3.6
80°	2.4
82.5°	2.4
85°	1.2
87.5°	0.0



TEST NUMBER: P1300351  
CATALOG NUMBER: P3AS17R30W2N902765DE010 E3DL1WMH\_4000K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)