

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300418

Luminaire Tested: P3AS17R30W2N902765DE010 E3DLP1WH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300418  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R30W2N902765DE010 E3DLP1WH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 5000K CCT AND, 90CRI ,  
E3DLP1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1276.0 lumens  
Efficiency: N/A  
Efficacy: 65.8 lumens/watt  
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300418  
CATALOG NUMBER: P3AS17R30W2N902765DE010 E3DLP1WH\_5000K

### Luminous Intensity Polar Plot

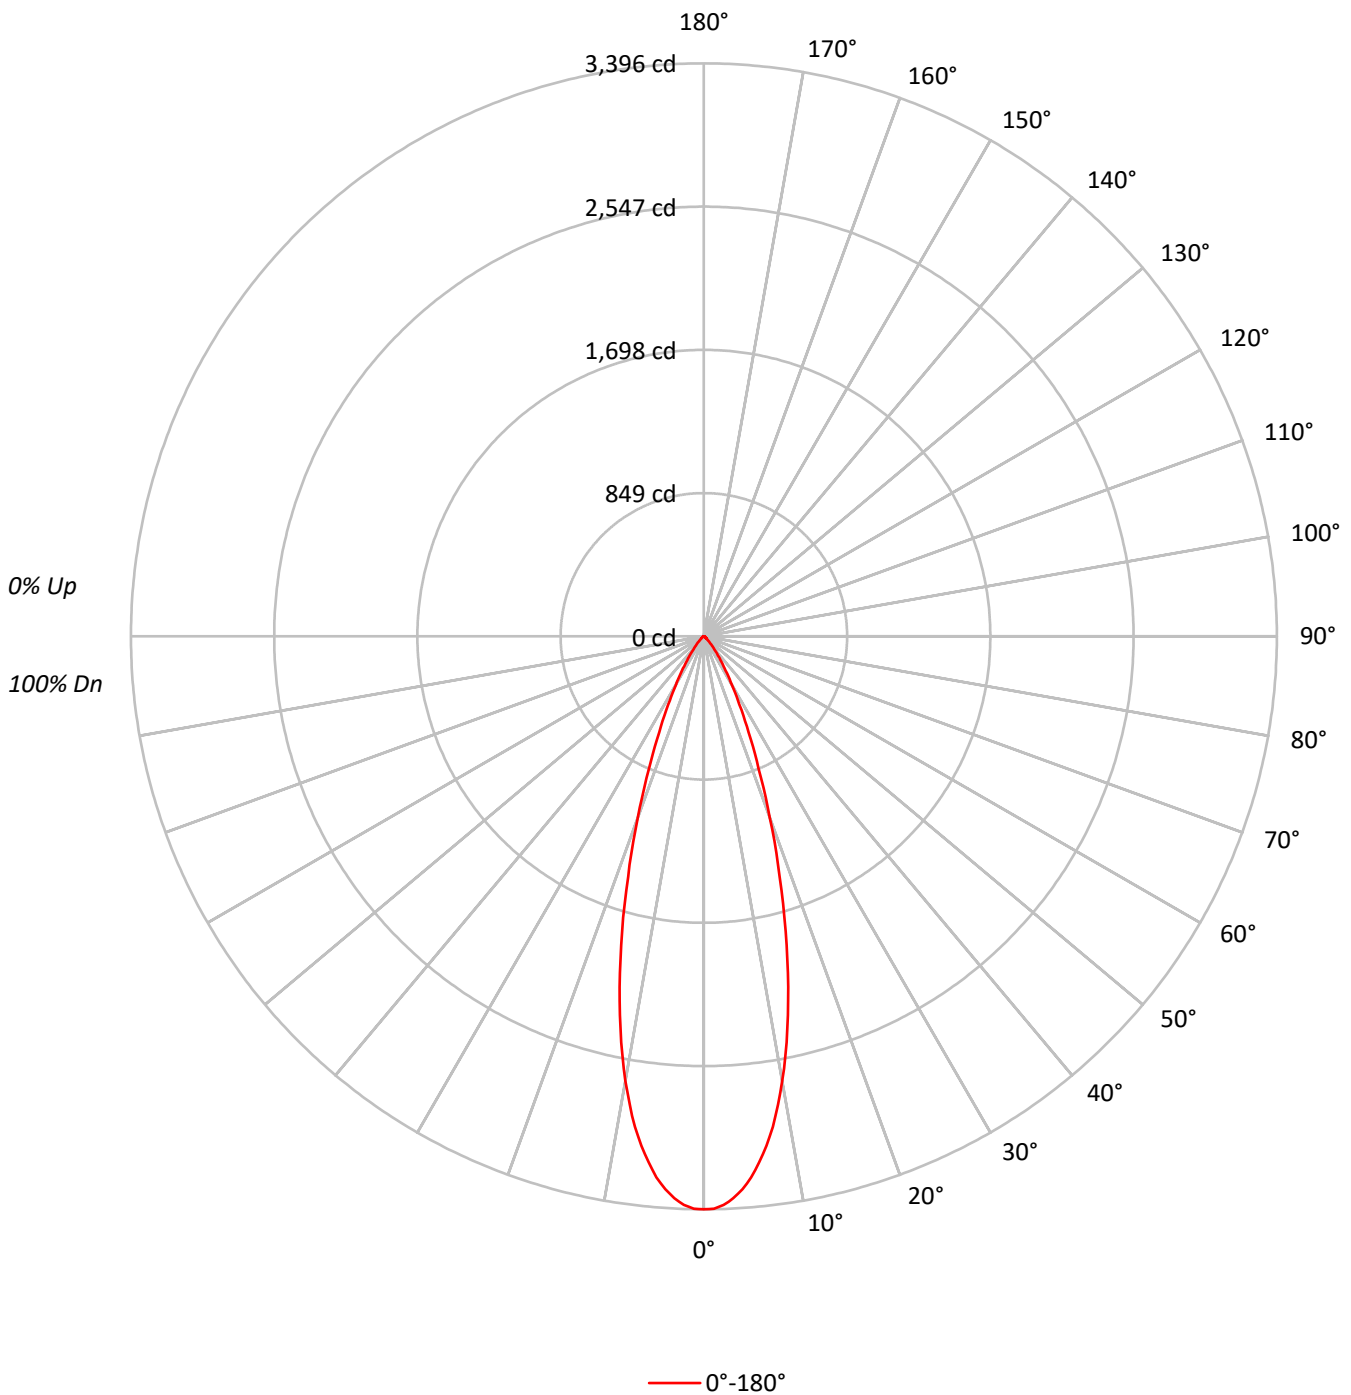



TEST NUMBER: P1300418

CATALOG NUMBER: P3AS17R30W2N902765DE010 E3DLP1WH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	86	86	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	82	82	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	78	78	78
6	94	86	81	78	92	85	81	77	84	80	77	83	79	76	81	78	76	75	75	75	75
7	90	82	77	74	89	82	77	74	81	76	73	80	76	73	79	75	73	71	71	71	71
8	87	79	74	71	86	79	74	71	78	73	70	77	73	70	76	72	70	69	69	69	69
9	84	76	71	68	83	75	71	68	75	70	67	74	70	67	73	70	67	66	66	66	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	63	63	63	63

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	744589
5°	708693
10°	596115
15°	429900
20°	266653
25°	151654
30°	84241
35°	45829
40°	24160
45°	13087
50°	6993
55°	4626
60°	4210
65°	4358
70°	3847
75°	3050
80°	3031
85°	3019

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13087 cd/sqm



TEST NUMBER: P1300418

CATALOG NUMBER: P3AS17R30W2N902765DE010 E3DLP1WH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	289.9	22.7
10°-20°	515.3	40.4
20°-30°	297.8	23.3
30°-40°	113.0	8.9
40°-50°	34.7	2.7
50°-60°	11.7	0.9
60°-70°	7.9	0.6
70°-80°	4.3	0.3
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1103.1	86.5
0°-40°	1216.1	95.3
0°-60°	1262.5	98.9
0°-90°	1276.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1276.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3396	
5°	3220	290
15°	1894	515
25°	627	298
35°	171	113
45°	42	35
55°	12	12
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1300418  
CATALOG NUMBER: P3AS17R30W2N902765DE010 E3DLP1WH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3395.6
1°	3393.2
2°	3372.7
3°	3334.1
4°	3285.9
5°	3219.6
6°	3135.2
7°	3041.2
8°	2936.3
9°	2811.0
10°	2677.2
11°	2532.5
12°	2379.4
13°	2219.1
14°	2056.4
15°	1893.7
17.5°	1493.5
20°	1142.7
22.5°	847.4
25°	626.8
27.5°	455.6
30°	332.7
32.5°	239.9
35°	171.2
37.5°	119.3
40°	84.4
42.5°	59.1
45°	42.2
47.5°	28.9
50°	20.5
52.5°	14.5
55°	12.1
57.5°	10.8
60°	9.6
62.5°	8.4
65°	8.4
67.5°	7.2
70°	6.0
72.5°	4.8
75°	3.6
77.5°	3.6
80°	2.4
82.5°	2.4
85°	1.2
87.5°	0.0



TEST NUMBER: P1300418  
CATALOG NUMBER: P3AS17R30W2N902765DE010 E3DLP1WH\_5000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)