

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300543

Luminaire Tested: P3AS17R35W2N902750DE010 E3DLP1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300543
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R35W2N902750DE010 E3DLP1GPH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 5000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 383.0 lumens
Efficiency: N/A
Efficacy: 19.7 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300543
CATALOG NUMBER: P3AS17R35W2N902750DE010 E3DLP1GPH_5000K

Luminous Intensity Polar Plot

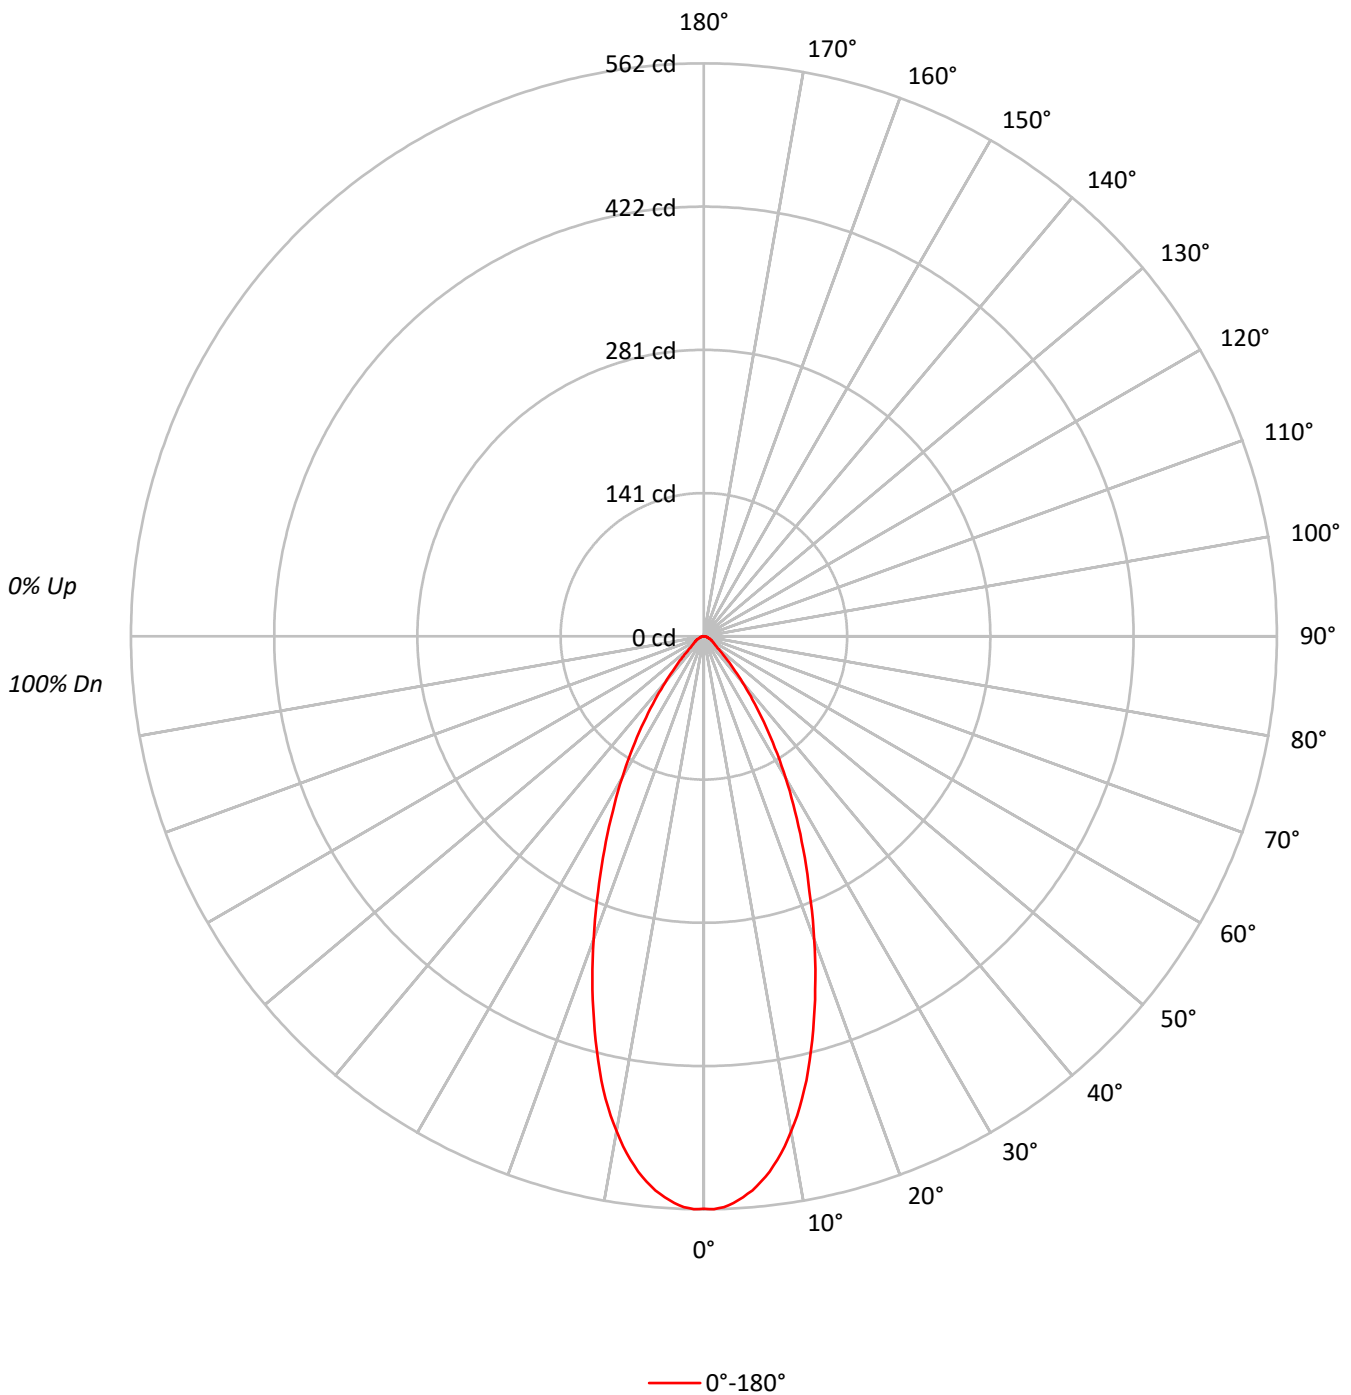



TEST NUMBER: P1300543
 CATALOG NUMBER: P3AS17R35W2N902750DE010 E3DLP1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.4	13.2
10°-20°	113.2	29.5
20°-30°	105.9	27.6
30°-40°	64.8	16.9
40°-50°	25.6	6.7
50°-60°	11.3	2.9
60°-70°	7.0	1.8
70°-80°	3.7	1.0
80°-90°	1.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	269.4	70.3
0°-40°	334.2	87.3
0°-60°	371.0	96.9
0°-90°	383.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	383.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	561	
5°	546	50
15°	410	113
25°	231	106
35°	103	65
45°	31	26
55°	12	11
65°	7	7
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1300543
CATALOG NUMBER: P3AS17R35W2N902750DE010 E3DLP1GPH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	561.4
1°	562.0
2°	560.2
3°	556.7
4°	551.4
5°	545.5
6°	537.8
7°	529.0
8°	518.4
9°	506.6
10°	493.0
11°	478.9
12°	463.5
13°	447.0
14°	428.7
15°	410.4
17.5°	363.3
20°	316.1
22.5°	270.7
25°	230.6
27.5°	193.4
30°	160.4
32.5°	129.7
35°	102.6
37.5°	78.4
40°	59.0
42.5°	42.5
45°	31.3
47.5°	22.4
50°	17.1
52.5°	14.2
55°	12.4
57.5°	10.6
60°	9.4
62.5°	8.3
65°	7.1
67.5°	5.9
70°	4.7
72.5°	4.1
75°	3.5
77.5°	2.9
80°	2.4
82.5°	1.8
85°	1.2
87.5°	0.6



TEST NUMBER: P1300543
CATALOG NUMBER: P3AS17R35W2N902750DE010 E3DLP1GPH_5000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)