

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300552

Luminaire Tested: P3AS17R35W2N902750DE010 E3DLP1LI_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300552
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R35W2N902750DE010 E3DLP1LI_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 4000K CCT AND, 90CRI ,
E3DLP1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 786.0 lumens
Efficiency: N/A
Efficacy: 40.5 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300552
CATALOG NUMBER: P3AS17R35W2N902750DE010 E3DLP1LI_4000K

Luminous Intensity Polar Plot

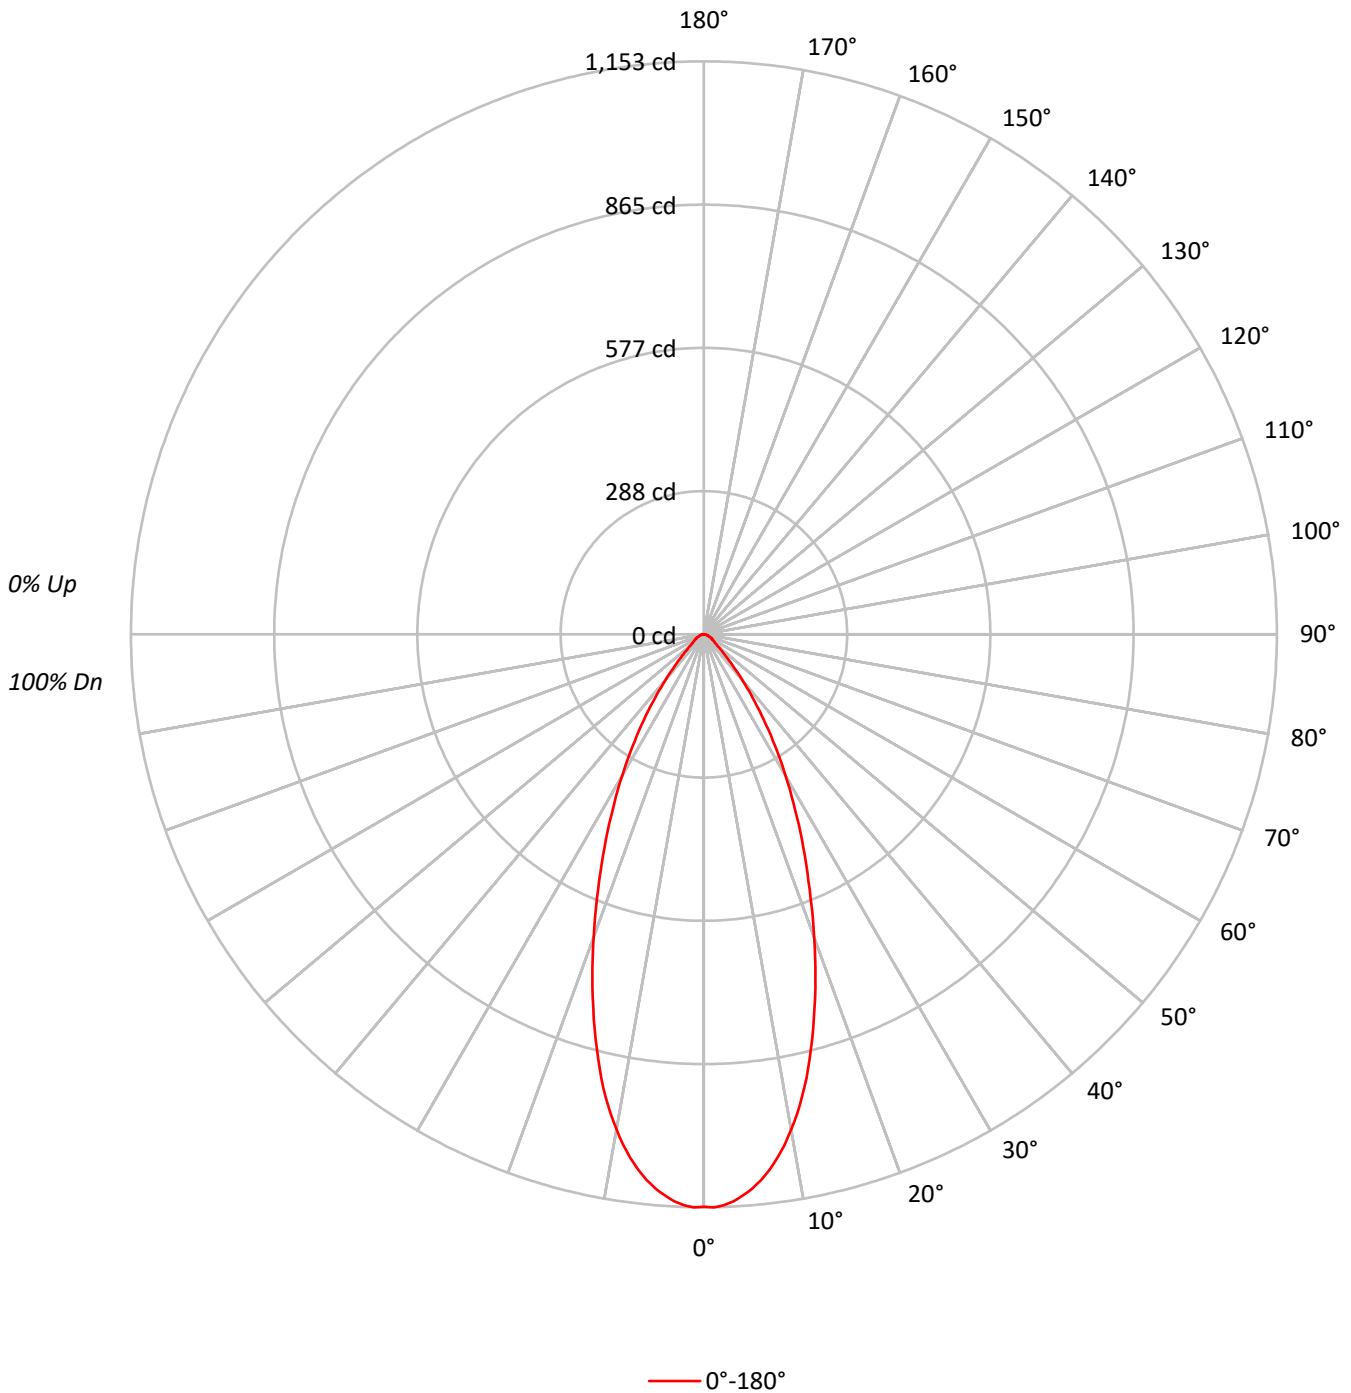



TEST NUMBER: P1300552

CATALOG NUMBER: P3AS17R35W2N902750DE010 E3DLP1LI_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.5	13.2
10°-20°	232.2	29.5
20°-30°	217.2	27.6
30°-40°	133.0	16.9
40°-50°	52.4	6.7
50°-60°	23.1	2.9
60°-70°	14.3	1.8
70°-80°	7.7	1.0
80°-90°	2.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	552.9	70.3
0°-40°	685.9	87.3
0°-60°	761.4	96.9
0°-90°	786.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	786.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1152	
5°	1120	103
15°	842	232
25°	473	217
35°	211	133
45°	64	52
55°	25	23
65°	14	14
75°	7	8
85°	2	3
90°	0	



TEST NUMBER: P1300552
CATALOG NUMBER: P3AS17R35W2N902750DE010 E3DLP1LI_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1152.1
1°	1153.3
2°	1149.7
3°	1142.5
4°	1131.6
5°	1119.5
6°	1103.7
7°	1085.6
8°	1063.8
9°	1039.6
10°	1011.8
11°	982.7
12°	951.2
13°	917.4
14°	879.8
15°	842.3
17.5°	745.5
20°	648.7
22.5°	555.5
25°	473.2
27.5°	397.0
30°	329.2
32.5°	266.3
35°	210.6
37.5°	161.0
40°	121.0
42.5°	87.1
45°	64.1
47.5°	46.0
50°	35.1
52.5°	29.0
55°	25.4
57.5°	21.8
60°	19.4
62.5°	16.9
65°	14.5
67.5°	12.1
70°	9.7
72.5°	8.5
75°	7.3
77.5°	6.1
80°	4.8
82.5°	3.6
85°	2.4
87.5°	1.2



TEST NUMBER: P1300552
CATALOG NUMBER: P3AS17R35W2N902750DE010 E3DLP1LI_4000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)