

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300665

Luminaire Tested: P3AS17R35W2N902765DE010 E3DLD1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300665
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R35W2N902765DE010 E3DLD1GPH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 4000K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 481.0 lumens
Efficiency: N/A
Efficacy: 24.8 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300665
CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1GPH_4000K

Luminous Intensity Polar Plot

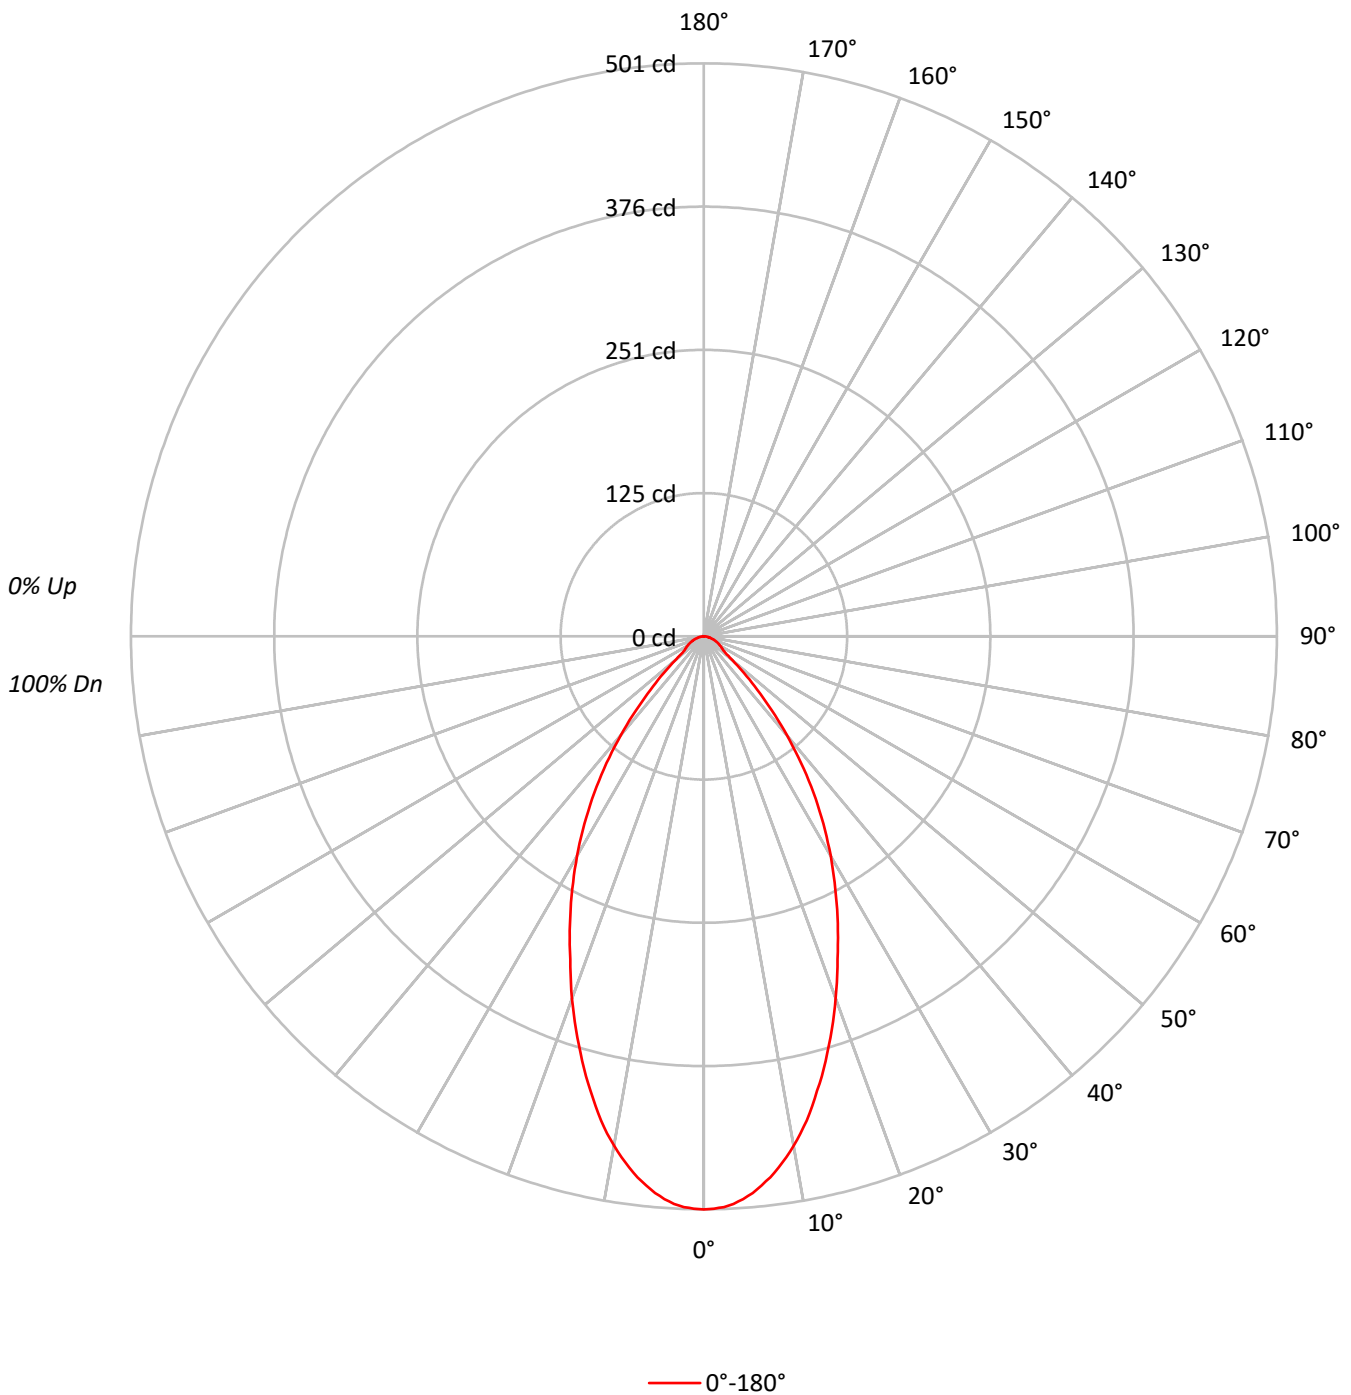



TEST NUMBER: P1300665

CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91				91
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83				83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76				76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69				69
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64				64
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59				59
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55				55
8	75	64	58	53	74	64	57	53	63	57	53	62	56	53	61	56	52	51				51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48				48
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	44				44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	109882
5°	107550
10°	100711
15°	90398
20°	78640
25°	67020
30°	56135
35°	44705
40°	32318
45°	20467
50°	11155
55°	7723
60°	7280
65°	6797
70°	6475
75°	5507
80°	5304
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20467 cd/sqm



TEST NUMBER: P1300665

CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1GPH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	45.5	9.5
10°-20°	110.8	23.0
20°-30°	127.0	26.4
30°-40°	103.6	21.5
40°-50°	52.3	10.9
50°-60°	19.4	4.0
60°-70°	13.0	2.7
70°-80°	7.2	1.5
80°-90°	2.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	283.3	58.9
0°-40°	386.9	80.4
0°-60°	458.6	95.3
0°-90°	481.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	481.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	501	
5°	489	45
15°	398	111
25°	277	127
35°	167	104
45°	66	52
55°	20	19
65°	13	13
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P1300665
CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1GPH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	501.1
1°	500.5
2°	499.3
3°	496.9
4°	493.3
5°	488.6
6°	482.6
7°	476.7
8°	469.0
9°	461.2
10°	452.3
11°	442.8
12°	432.7
13°	421.4
14°	409.5
15°	398.2
17.5°	367.9
20°	337.0
22.5°	305.5
25°	277.0
27.5°	249.0
30°	221.7
32.5°	194.4
35°	167.0
37.5°	139.7
40°	112.9
42.5°	88.0
45°	66.0
47.5°	47.6
50°	32.7
52.5°	23.8
55°	20.2
57.5°	18.4
60°	16.6
62.5°	14.9
65°	13.1
67.5°	11.3
70°	10.1
72.5°	8.3
75°	6.5
77.5°	5.3
80°	4.2
82.5°	3.0
85°	1.8
87.5°	1.2



TEST NUMBER: P1300665
CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1GPH_4000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)