

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300666

Luminaire Tested: P3AS17R35W2N902765DE010 E3DLD1GPH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300666  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R35W2N902765DE010 E3DLD1GPH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 5000K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 478.0 lumens  
Efficiency: N/A  
Efficacy: 24.6 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300666  
CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1GPH\_5000K

### Luminous Intensity Polar Plot

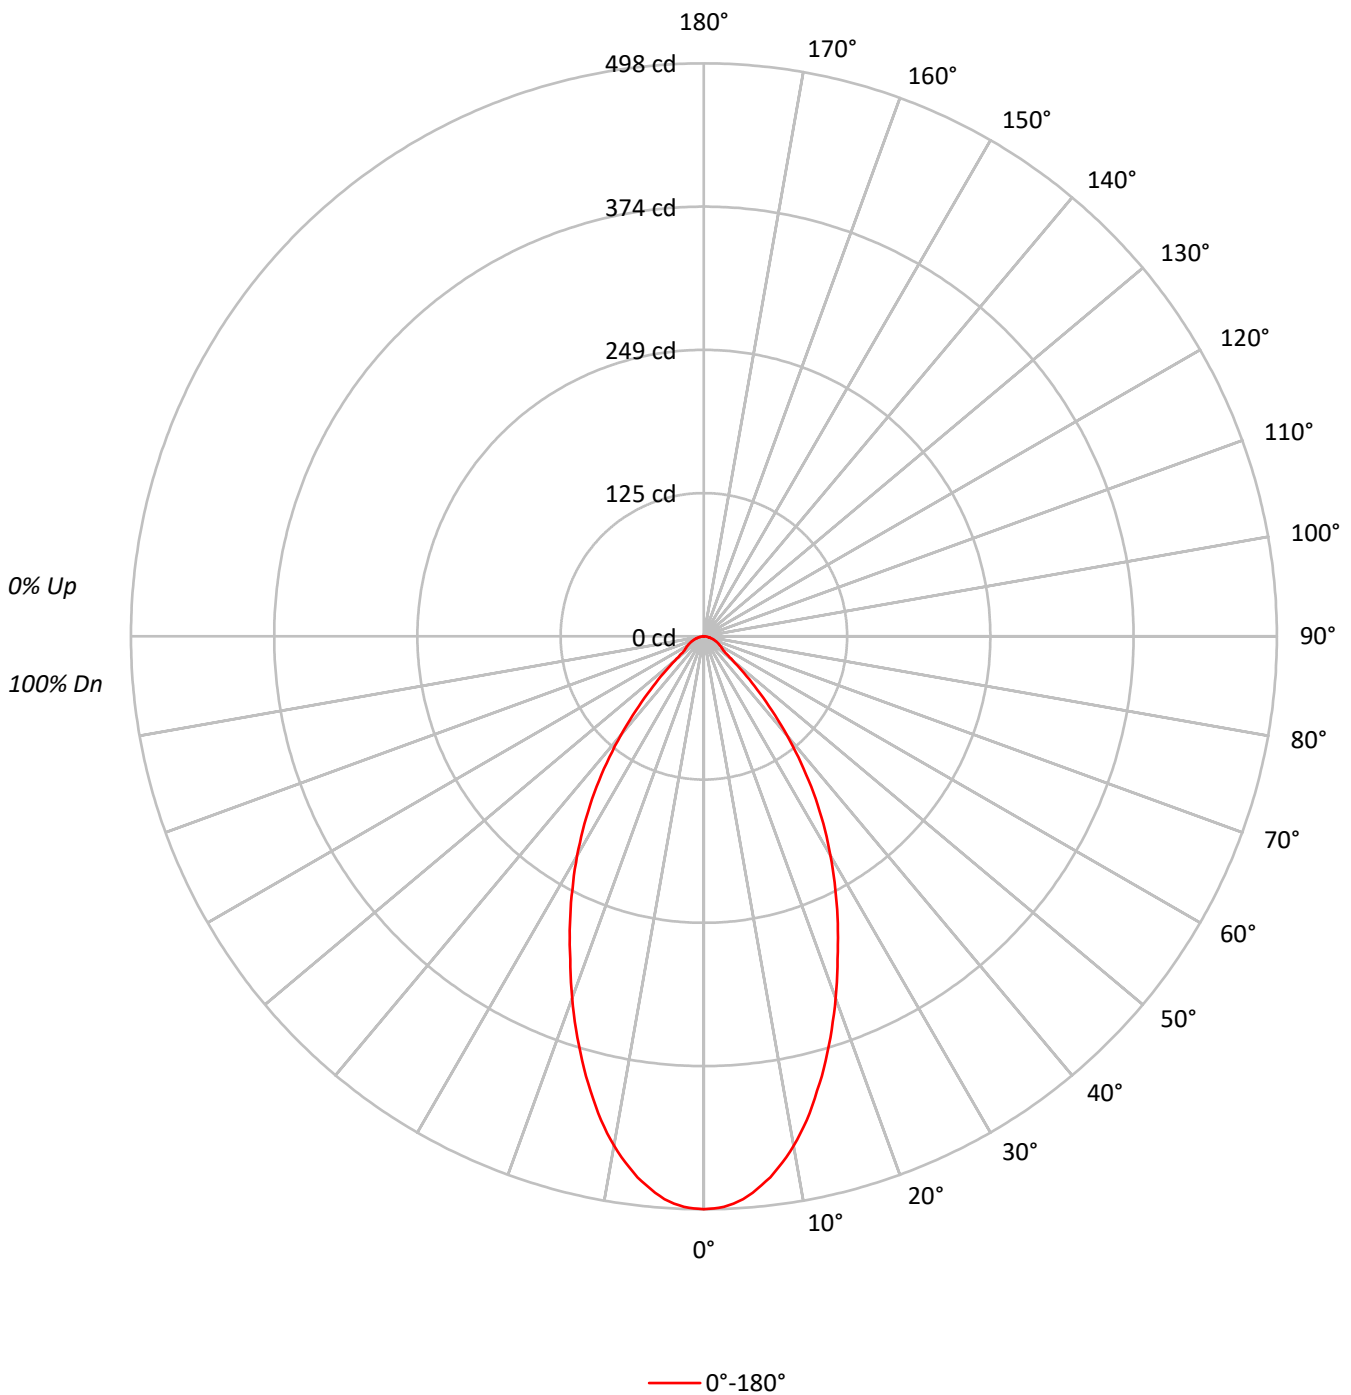



TEST NUMBER: P1300666

CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1GPH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69			
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64			
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59			
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55			
8	75	64	58	53	74	64	57	53	63	57	53	62	56	53	61	56	52	51			
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48			
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	109180
5°	106867
10°	100087
15°	89853
20°	78150
25°	66609
30°	55781
35°	44437
40°	32117
45°	20343
50°	11087
55°	7684
60°	7236
65°	6745
70°	6411
75°	5507
80°	5177
85°	4529

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 20343 cd/sqm



TEST NUMBER: P1300666

CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1GPH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	45.2	9.5
10°-20°	110.1	23.0
20°-30°	126.2	26.4
30°-40°	103.0	21.5
40°-50°	51.9	10.9
50°-60°	19.3	4.0
60°-70°	12.9	2.7
70°-80°	7.2	1.5
80°-90°	2.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	281.5	58.9
0°-40°	384.5	80.4
0°-60°	455.7	95.3
0°-90°	478.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	478.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	498	
5°	486	45
15°	396	110
25°	275	126
35°	166	103
45°	66	52
55°	20	19
65°	13	13
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P1300666  
CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1GPH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	497.9
1°	497.4
2°	496.2
3°	493.8
4°	490.3
5°	485.5
6°	479.6
7°	473.7
8°	466.0
9°	458.4
10°	449.5
11°	440.1
12°	430.0
13°	418.8
14°	407.0
15°	395.8
17.5°	365.6
20°	334.9
22.5°	303.6
25°	275.3
27.5°	247.5
30°	220.3
32.5°	193.2
35°	166.0
37.5°	138.8
40°	112.2
42.5°	87.4
45°	65.6
47.5°	47.3
50°	32.5
52.5°	23.6
55°	20.1
57.5°	18.3
60°	16.5
62.5°	14.8
65°	13.0
67.5°	11.2
70°	10.0
72.5°	8.3
75°	6.5
77.5°	5.3
80°	4.1
82.5°	3.0
85°	1.8
87.5°	1.2



TEST NUMBER: P1300666  
CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1GPH\_5000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)