

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300681

Luminaire Tested: P3AS17R35W2N902765DE010 E3DLD1MW\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300681  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R35W2N902765DE010 E3DLD1MW\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,  
E3DLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 966.0 lumens  
Efficiency: N/A  
Efficacy: 49.8 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300681  
CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1MW\_3000K

### Luminous Intensity Polar Plot

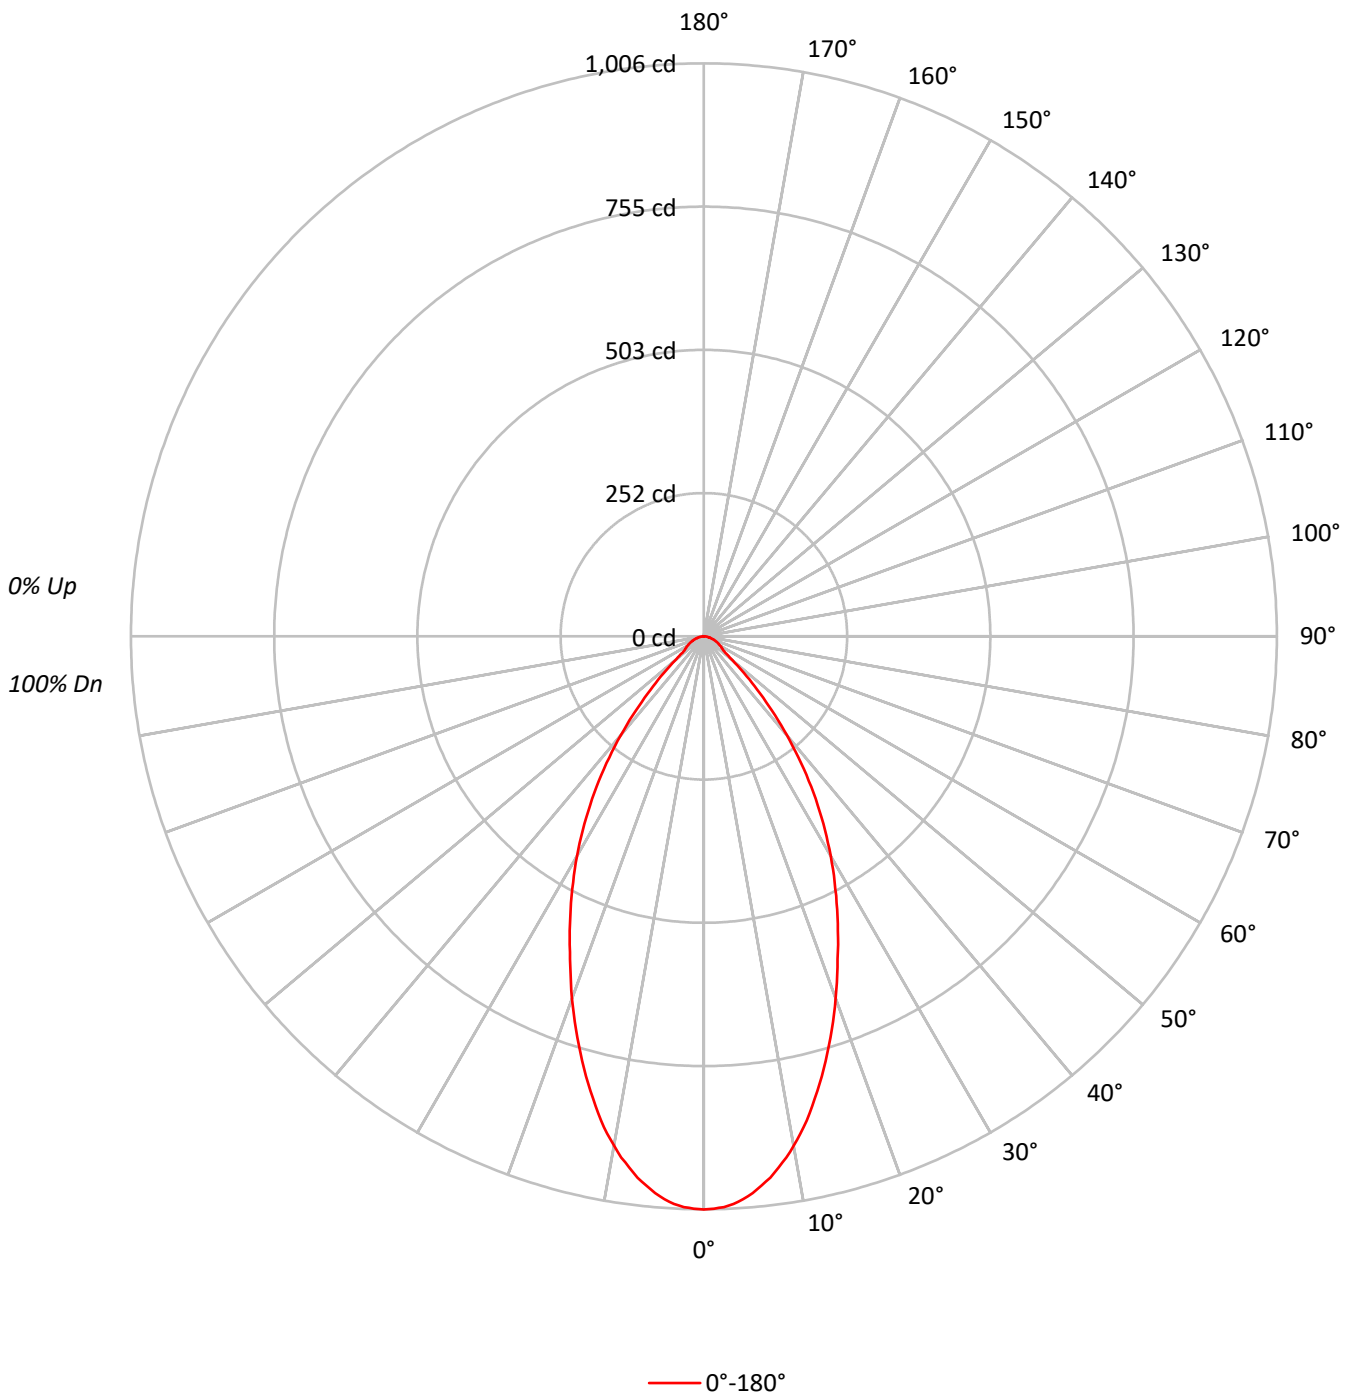



TEST NUMBER: P1300681

CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1MW\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69			
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64			
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59			
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55			
8	75	64	58	53	74	64	57	53	63	57	53	62	56	53	61	56	52	51			
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48			
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	220662
5°	215980
10°	202267
15°	181567
20°	157934
25°	134596
30°	112752
35°	89784
40°	64922
45°	41090
50°	22413
55°	15522
60°	14648
65°	13646
70°	13015
75°	11099
80°	10607
85°	9057

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 41090 cd/sqm



TEST NUMBER: P1300681

CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1MW\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	91.3	9.5
10°-20°	222.6	23.0
20°-30°	255.1	26.4
30°-40°	208.1	21.5
40°-50°	105.0	10.9
50°-60°	39.0	4.0
60°-70°	26.1	2.7
70°-80°	14.5	1.5
80°-90°	4.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	568.9	58.9
0°-40°	777.1	80.4
0°-60°	921.0	95.3
0°-90°	966.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	966.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1006	
5°	981	91
15°	800	223
25°	556	255
35°	335	208
45°	132	105
55°	41	39
65°	26	26
75°	13	14
85°	4	4
90°	0	



TEST NUMBER: P1300681  
CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1MW\_3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1006.3
1°	1005.1
2°	1002.7
3°	997.9
4°	990.8
5°	981.2
6°	969.3
7°	957.4
8°	941.8
9°	926.3
10°	908.4
11°	889.3
12°	869.0
13°	846.3
14°	822.5
15°	799.8
17.5°	738.9
20°	676.8
22.5°	613.6
25°	556.3
27.5°	500.2
30°	445.3
32.5°	390.3
35°	335.4
37.5°	280.5
40°	226.8
42.5°	176.7
45°	132.5
47.5°	95.5
50°	65.7
52.5°	47.7
55°	40.6
57.5°	37.0
60°	33.4
62.5°	29.8
65°	26.3
67.5°	22.7
70°	20.3
72.5°	16.7
75°	13.1
77.5°	10.7
80°	8.4
82.5°	6.0
85°	3.6
87.5°	2.4



TEST NUMBER: P1300681  
CATALOG NUMBER: P3AS17R35W2N902765DE010 E3DLD1MW\_3000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)