

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300791

Luminaire Tested: P3AS17R40W2N902750DE010 E3D1LI\_5000K

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300791  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R40W2N902750DE010 E3D1LI\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 5000K CCT AND, 90CRI ,  
E3D1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1687.0 lumens  
Efficiency: N/A  
Efficacy: 87.0 lumens/watt  
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300791  
CATALOG NUMBER: P3AS17R40W2N902750DE010 E3D1LI\_5000K

### Luminous Intensity Polar Plot

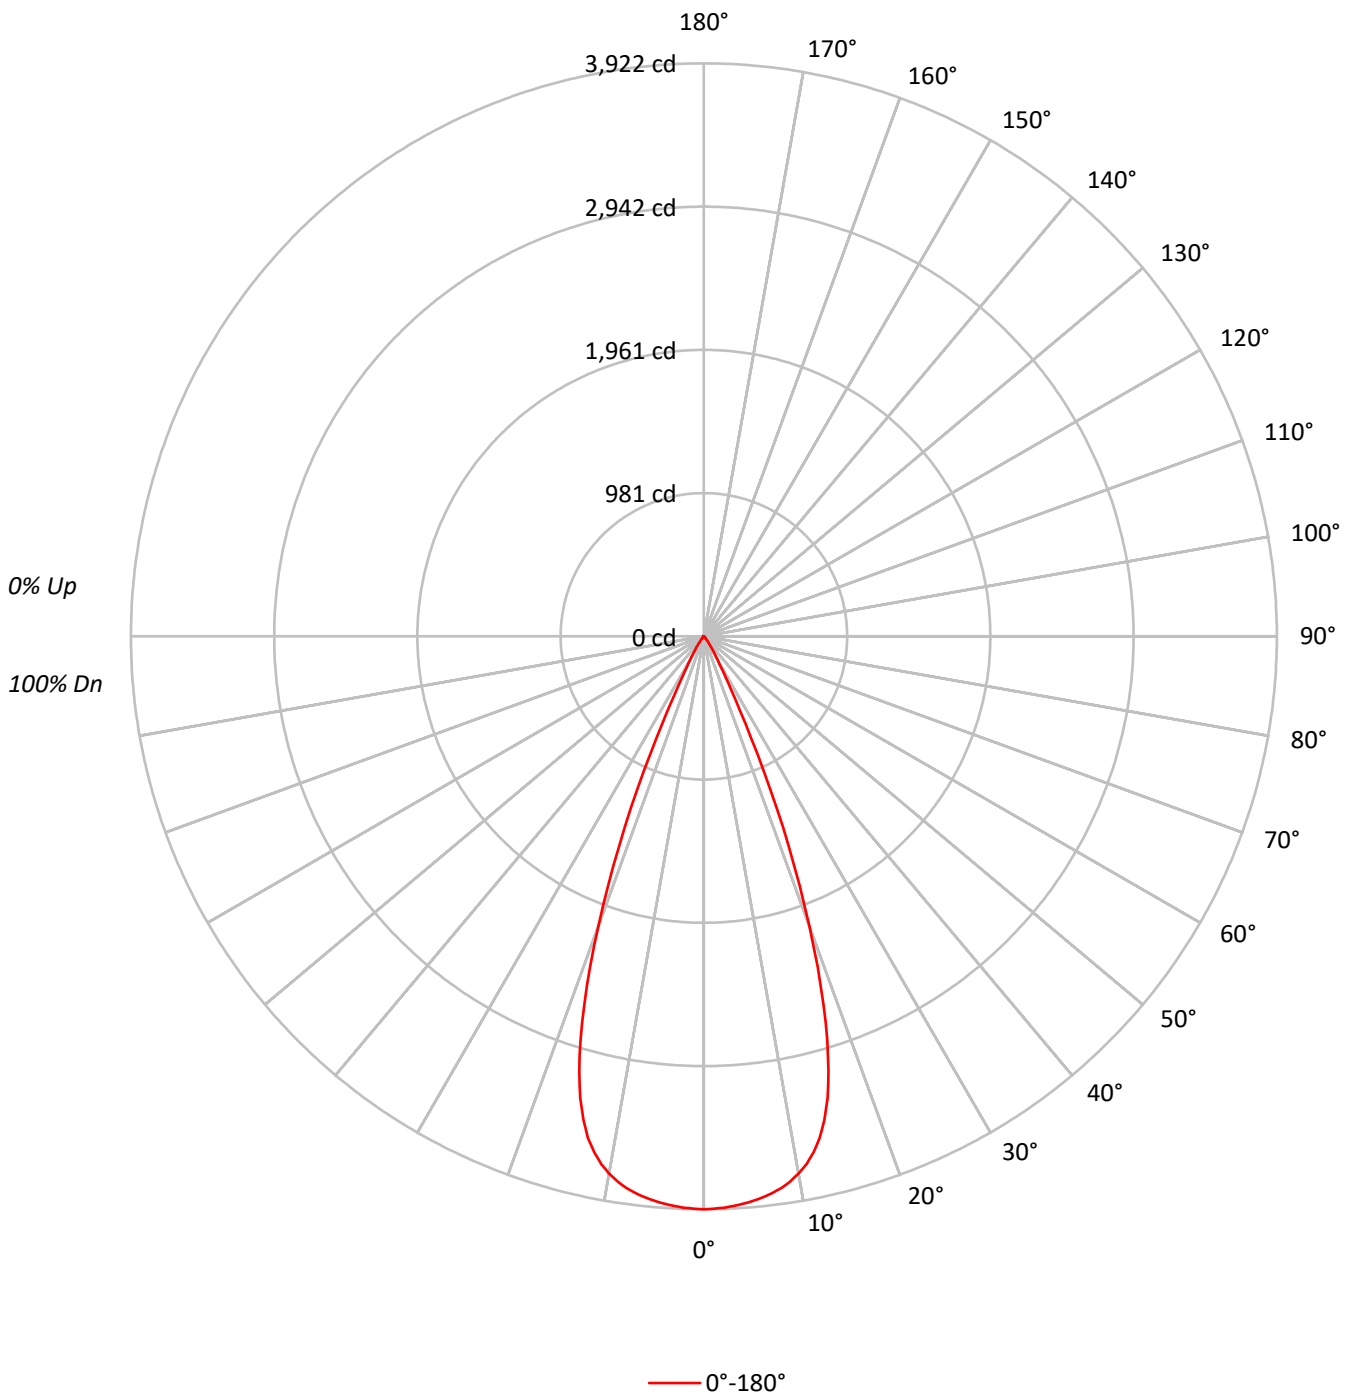



TEST NUMBER: P1300791

CATALOG NUMBER: P3AS17R40W2N902750DE010 E3D1LI\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	98	98	98	98	98	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	96	95	94	94	94	94	92
3	107	102	98	95	105	100	97	94	98	95	93	96	93	91	93	91	90	90	90	90	88
4	103	97	93	90	101	96	92	89	94	91	88	92	89	87	90	88	86	86	86	86	85
5	99	93	89	85	98	92	88	85	91	87	84	89	86	84	88	85	83	83	83	83	82
6	96	89	85	81	95	89	84	81	87	83	81	86	83	80	85	82	80	80	80	80	79
7	93	86	81	78	92	85	81	78	84	80	77	83	80	77	82	79	77	77	77	77	76
8	90	83	78	75	89	82	78	75	81	77	75	80	77	74	79	76	74	74	74	74	73
9	87	80	75	72	86	79	75	72	78	75	72	78	74	72	77	74	71	71	71	71	70
10	84	77	72	70	83	77	72	69	76	72	69	75	72	69	74	71	69	69	69	69	68

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	859909
5°	853707
10°	831358
15°	742615
20°	492423
25°	184462
30°	49349
35°	19301
40°	6927
45°	3287
50°	1023
55°	459
60°	263
65°	311
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3287 cd/sqm



TEST NUMBER: P1300791

CATALOG NUMBER: P3AS17R40W2N902750DE010 E3D1LI\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	366.0	21.7
10°-20°	866.8	51.4
20°-30°	393.1	23.3
30°-40°	50.9	3.0
40°-50°	8.8	0.5
50°-60°	1.1	0.1
60°-70°	0.4	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1625.8	96.4
0°-40°	1676.8	99.4
0°-60°	1686.6	100.0
0°-90°	1687.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1687.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3922	
5°	3878	366
15°	3271	867
25°	762	393
35°	72	51
45°	11	9
55°	1	1
65°	1	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1300791

CATALOG NUMBER: P3AS17R40W2N902750DE010 E3D1LI\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3921.5
1°	3919.1
2°	3913.2
3°	3904.3
4°	3893.1
5°	3878.4
6°	3861.2
7°	3840.0
8°	3814.0
9°	3778.5
10°	3733.7
11°	3681.1
12°	3610.8
13°	3524.0
14°	3410.6
15°	3271.2
16°	3093.5
17°	2890.9
18°	2647.6
19°	2390.7
20°	2110.2
21°	1829.6
22°	1553.2
23°	1278.0
24°	1007.5
25°	762.4
26°	564.6
27°	413.4
28°	310.6
29°	241.5
30°	194.9
31°	161.2
32°	134.7
32.5°	122.8
33°	111.0
34°	90.4
35°	72.1
36°	56.7
37°	44.9
37.5°	40.2
38°	35.4
39°	29.5
40°	24.2
42.5°	15.9
45°	10.6



TEST NUMBER: P1300791  
CATALOG NUMBER: P3AS17R40W2N902750DE010 E3D1LI\_5000K

**CANDELA DISTRIBUTION (continued):**

	0°
47.5°	6.5
50°	3.0
52.5°	1.2
55°	1.2
57.5°	0.6
60°	0.6
62.5°	0.6
65°	0.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)