

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300868

Luminaire Tested: P3AS17R40W2N902750DE010 E3DLP1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300868
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R40W2N902750DE010 E3DLP1GPH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 3000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 430.0 lumens
Efficiency: N/A
Efficacy: 22.2 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300868
CATALOG NUMBER: P3AS17R40W2N902750DE010 E3DLP1GPH_3000K

Luminous Intensity Polar Plot

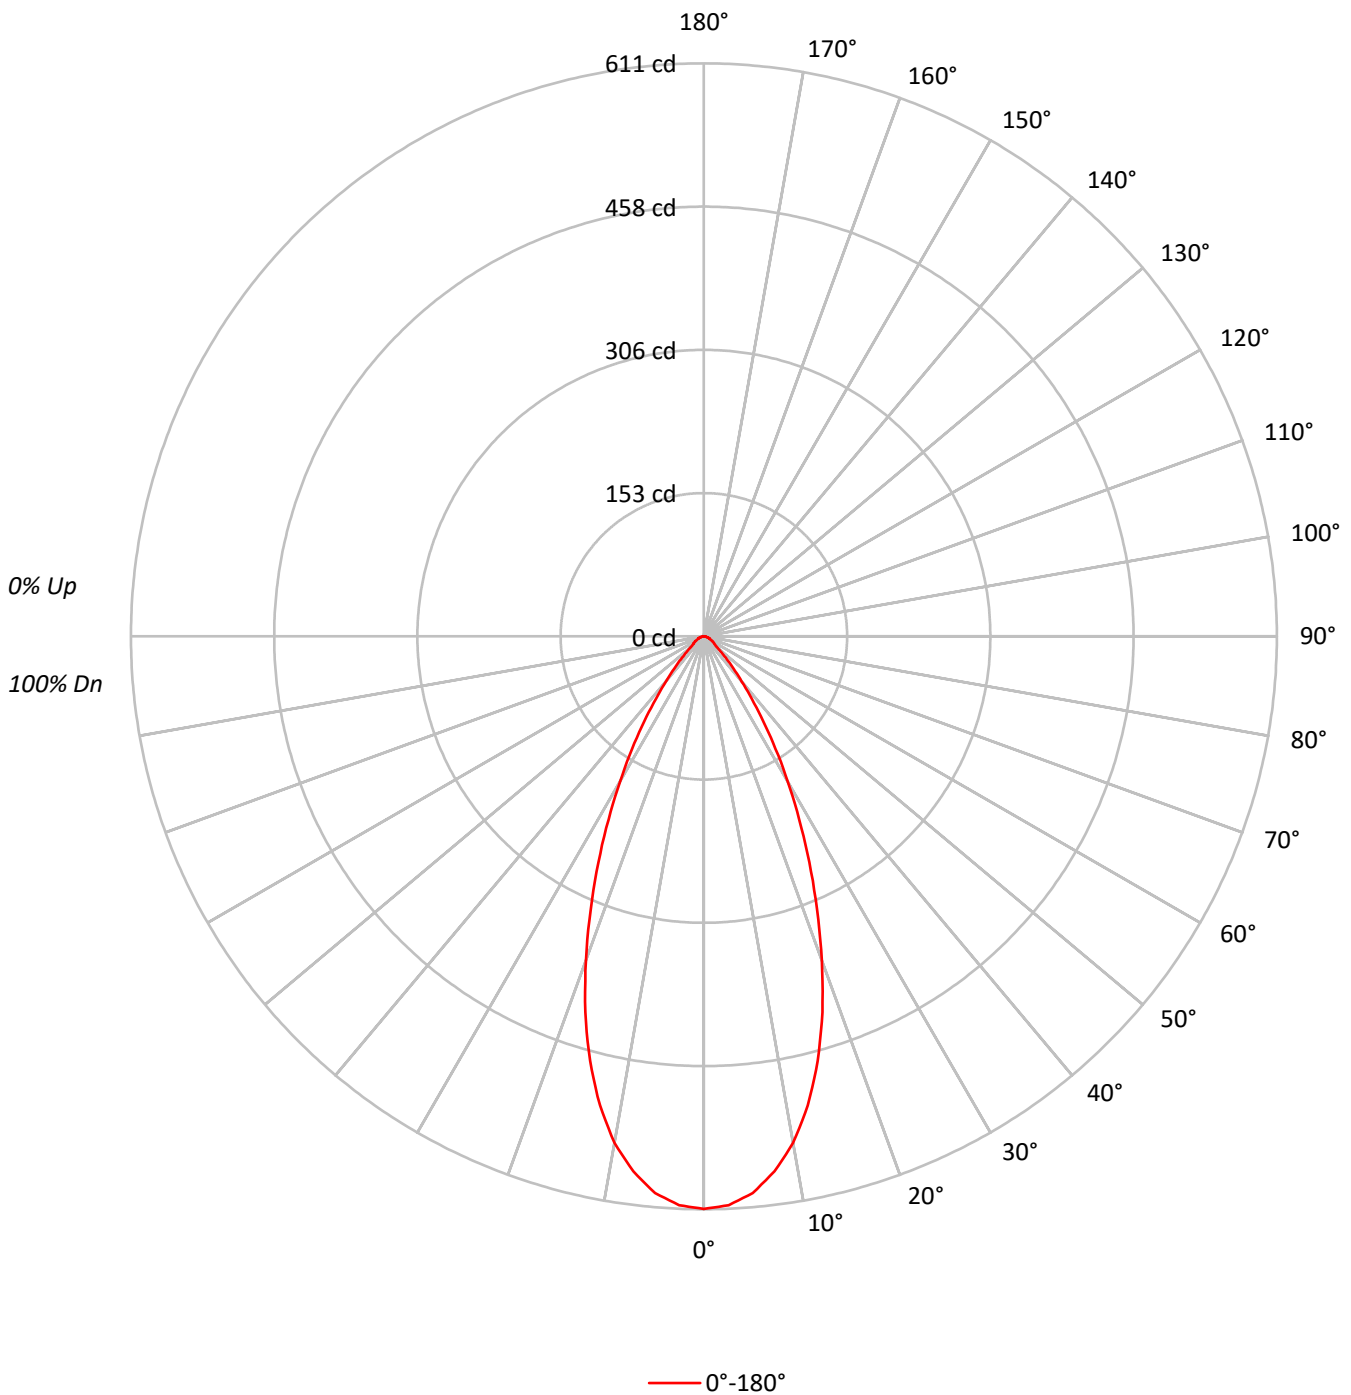



TEST NUMBER: P1300868
 CATALOG NUMBER: P3AS17R40W2N902750DE010 E3DLP1GPH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	93	97	94	91	94	92	89	92	89	88	86	86	86	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80	80	80	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74	74	74	74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69	69	69	69
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	69	66	65	65	65	65
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	62	61	61	61	61
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58	58	58	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51	51	51	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	133893
5°	131191
10°	122131
15°	106448
20°	85781
25°	64310
30°	45222
35°	29607
40°	17919
45°	10699
50°	6379
55°	5161
60°	4605
65°	3943
70°	3783
75°	2965
80°	2904
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10699 cd/sqm



TEST NUMBER: P1300868

CATALOG NUMBER: P3AS17R40W2N902750DE010 E3DLP1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.3	12.9
10°-20°	129.1	30.0
20°-30°	121.7	28.3
30°-40°	70.4	16.4
40°-50°	28.0	6.5
50°-60°	12.4	2.9
60°-70°	7.7	1.8
70°-80°	4.0	0.9
80°-90°	1.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	306.2	71.2
0°-40°	376.6	87.6
0°-60°	417.0	97.0
0°-90°	430.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	430.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	611	
5°	596	55
15°	469	129
25°	266	122
35°	111	70
45°	34	28
55°	14	12
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1300868
CATALOG NUMBER: P3AS17R40W2N902750DE010 E3DLP1GPH_3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	610.6
2.5°	607.1
5°	596.0
7.5°	575.5
10°	548.5
12.5°	512.2
15°	468.9
17.5°	420.3
20°	367.6
22.5°	315.0
25°	265.8
27.5°	220.1
30°	178.6
32.5°	142.3
35°	110.6
37.5°	83.7
40°	62.6
42.5°	46.8
45°	34.5
47.5°	25.2
50°	18.7
52.5°	15.2
55°	13.5
57.5°	12.3
60°	10.5
62.5°	8.8
65°	7.6
67.5°	6.4
70°	5.9
72.5°	4.7
75°	3.5
77.5°	2.9
80°	2.3
82.5°	1.8
85°	1.2
87.5°	0.6
90°	0.0

(END OF REPORT)