

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300970

Luminaire Tested: P3AS17R40W2N902765DE010 E3DL1H_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300970
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R40W2N902765DE010 E3DL1H_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 3000K CCT AND, 90CRI ,
E3DL1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1391.0 lumens
Efficiency: N/A
Efficacy: 71.7 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300970
CATALOG NUMBER: P3AS17R40W2N902765DE010 E3DL1H_3000K

Luminous Intensity Polar Plot

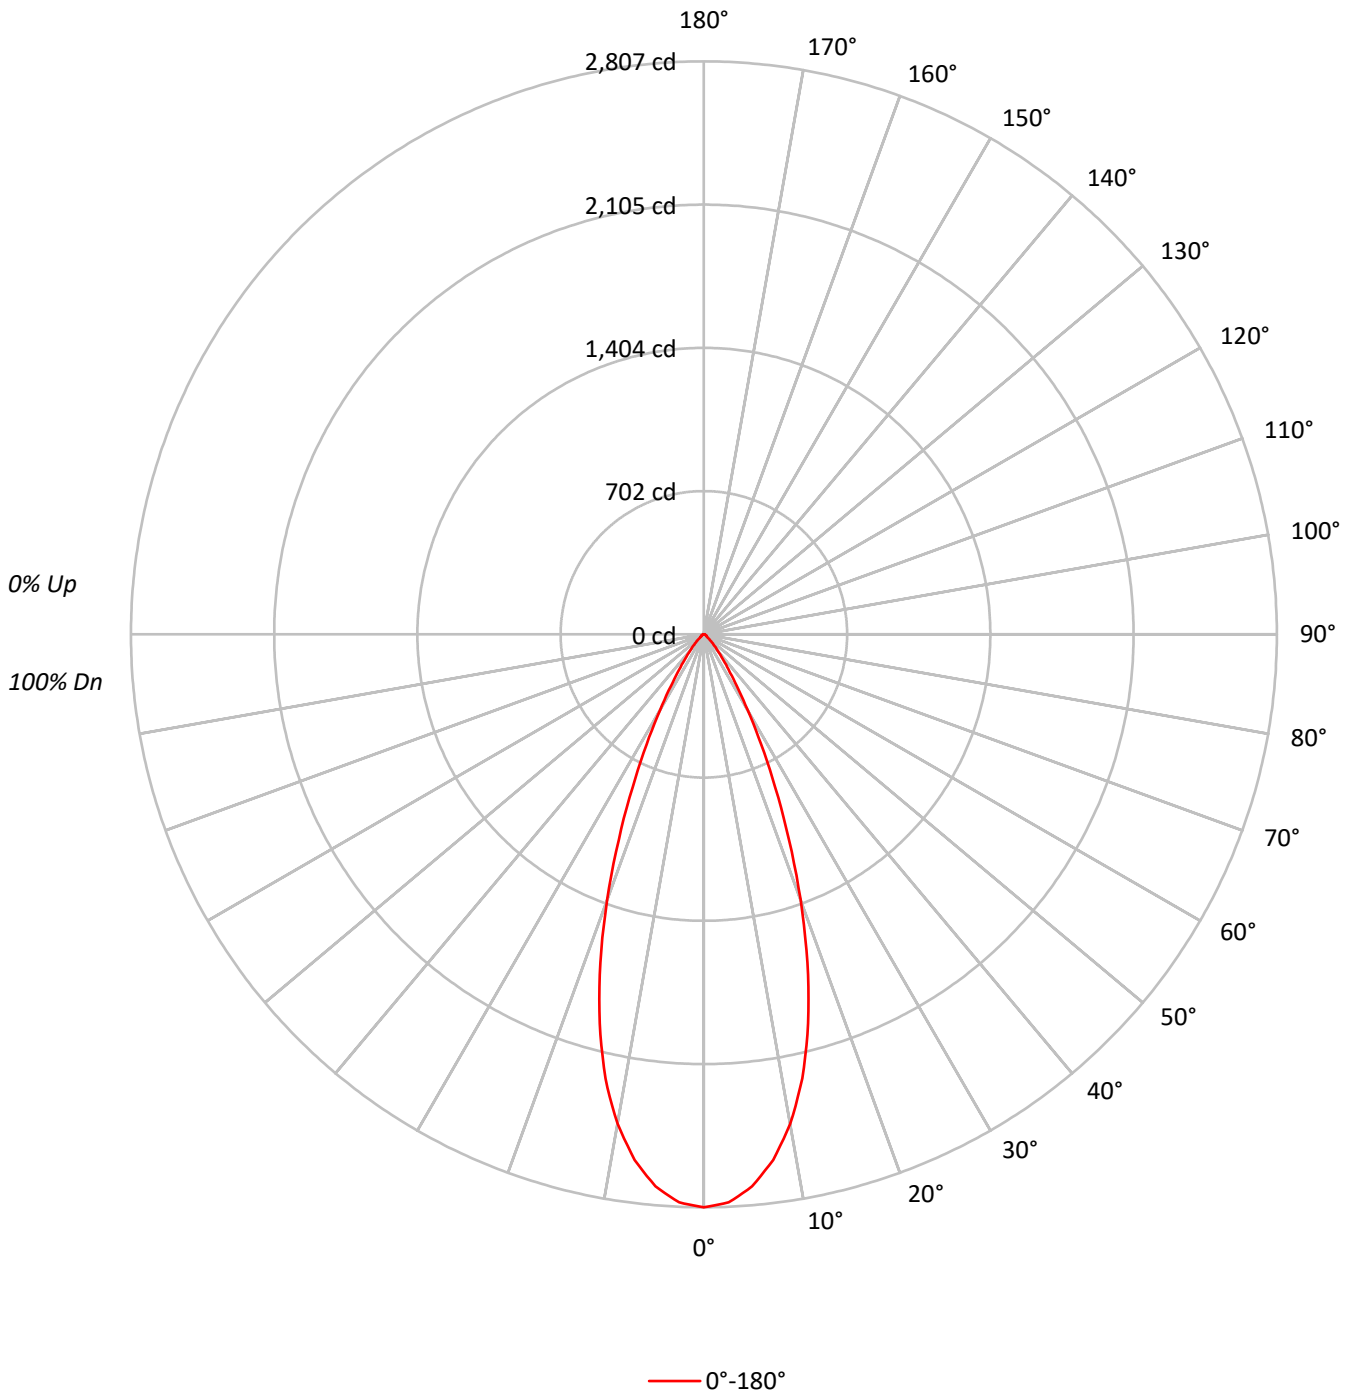



TEST NUMBER: P1300970
 CATALOG NUMBER: P3AS17R40W2N902765DE010 E3DL1H_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 114 | 111 | 109 | 107 | 112 | 109 | 107 | 105 | 105 | 104 | 102 | 102 | 100 | 99 | 98 | 97 | 96 | 94 | 94 | 94 | 94 |
| 2 | 109 | 105 | 101 | 98 | 107 | 103 | 100 | 97 | 100 | 97 | 95 | 97 | 95 | 93 | 94 | 92 | 91 | 89 | 89 | 89 | 89 |
| 3 | 104 | 99 | 94 | 91 | 102 | 97 | 93 | 90 | 95 | 91 | 88 | 92 | 89 | 87 | 90 | 88 | 86 | 84 | 84 | 84 | 84 |
| 4 | 100 | 93 | 88 | 85 | 98 | 92 | 88 | 84 | 90 | 86 | 83 | 88 | 85 | 82 | 86 | 84 | 81 | 80 | 80 | 80 | 80 |
| 5 | 96 | 88 | 83 | 79 | 94 | 88 | 83 | 79 | 86 | 82 | 78 | 84 | 81 | 78 | 83 | 80 | 77 | 76 | 76 | 76 | 76 |
| 6 | 92 | 84 | 79 | 75 | 91 | 83 | 78 | 75 | 82 | 78 | 74 | 81 | 77 | 74 | 79 | 76 | 73 | 72 | 72 | 72 | 72 |
| 7 | 88 | 80 | 75 | 71 | 87 | 79 | 74 | 71 | 78 | 74 | 71 | 77 | 73 | 70 | 76 | 73 | 70 | 69 | 69 | 69 | 69 |
| 8 | 85 | 76 | 71 | 68 | 84 | 76 | 71 | 67 | 75 | 70 | 67 | 74 | 70 | 67 | 73 | 69 | 67 | 65 | 65 | 65 | 65 |
| 9 | 82 | 73 | 68 | 64 | 81 | 73 | 68 | 64 | 72 | 67 | 64 | 71 | 67 | 64 | 70 | 66 | 64 | 63 | 63 | 63 | 63 |
| 10 | 78 | 70 | 65 | 62 | 78 | 70 | 65 | 61 | 69 | 64 | 61 | 68 | 64 | 61 | 67 | 64 | 61 | 60 | 60 | 60 | 60 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 615499 |
| 5° | 597621 |
| 10° | 542319 |
| 15° | 448039 |
| 20° | 323195 |
| 25° | 199899 |
| 30° | 108219 |
| 35° | 55921 |
| 40° | 30428 |
| 45° | 17025 |
| 50° | 8563 |
| 55° | 6384 |
| 60° | 5745 |
| 65° | 5552 |
| 70° | 5386 |
| 75° | 5083 |
| 80° | 4546 |
| 85° | 3019 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17025 cd/sqm



TEST NUMBER: P1300970

CATALOG NUMBER: P3AS17R40W2N902765DE010 E3DL1H_3000K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 250.3 | 18.0 |
| 10°-20° | 537.4 | 38.6 |
| 20°-30° | 383.5 | 27.6 |
| 30°-40° | 141.2 | 10.1 |
| 40°-50° | 44.5 | 3.2 |
| 50°-60° | 15.4 | 1.1 |
| 60°-70° | 10.6 | 0.8 |
| 70°-80° | 6.3 | 0.5 |
| 80°-90° | 1.8 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1171.2 | 84.2 |
| 0°-40° | 1312.4 | 94.3 |
| 0°-60° | 1372.3 | 98.7 |
| 0°-90° | 1391.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1391.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 2807 | |
| 5° | 2715 | 250 |
| 15° | 1974 | 537 |
| 25° | 826 | 384 |
| 35° | 209 | 141 |
| 45° | 55 | 44 |
| 55° | 17 | 15 |
| 65° | 11 | 11 |
| 75° | 6 | 6 |
| 85° | 1 | 2 |
| 90° | 0 | |



TEST NUMBER: P1300970
CATALOG NUMBER: P3AS17R40W2N902765DE010 E3DL1H_3000K

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 2806.9 |
| 2.5° | 2785.4 |
| 5° | 2715.0 |
| 7.5° | 2598.0 |
| 10° | 2435.6 |
| 12.5° | 2229.1 |
| 15° | 1973.6 |
| 17.5° | 1687.0 |
| 20° | 1385.0 |
| 22.5° | 1087.7 |
| 25° | 826.2 |
| 27.5° | 606.5 |
| 30° | 427.4 |
| 32.5° | 299.7 |
| 35° | 208.9 |
| 37.5° | 148.0 |
| 40° | 106.3 |
| 42.5° | 76.4 |
| 45° | 54.9 |
| 47.5° | 37.0 |
| 50° | 25.1 |
| 52.5° | 17.9 |
| 55° | 16.7 |
| 57.5° | 15.5 |
| 60° | 13.1 |
| 62.5° | 11.9 |
| 65° | 10.7 |
| 67.5° | 9.6 |
| 70° | 8.4 |
| 72.5° | 7.2 |
| 75° | 6.0 |
| 77.5° | 4.8 |
| 80° | 3.6 |
| 82.5° | 2.4 |
| 85° | 1.2 |
| 87.5° | 1.2 |
| 90° | 0.0 |

(END OF REPORT)