

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301033

Luminaire Tested: P3AS17R40W2N902765DE010 E3DLD1WMH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1301033  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R40W2N902765DE010 E3DLD1WMH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 5000K CCT AND, 90CRI ,  
E3DLD1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1077.0 lumens  
Efficiency: N/A  
Efficacy: 55.5 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1301033  
CATALOG NUMBER: P3AS17R40W2N902765DE010 E3DLD1WMH\_5000K

### Luminous Intensity Polar Plot

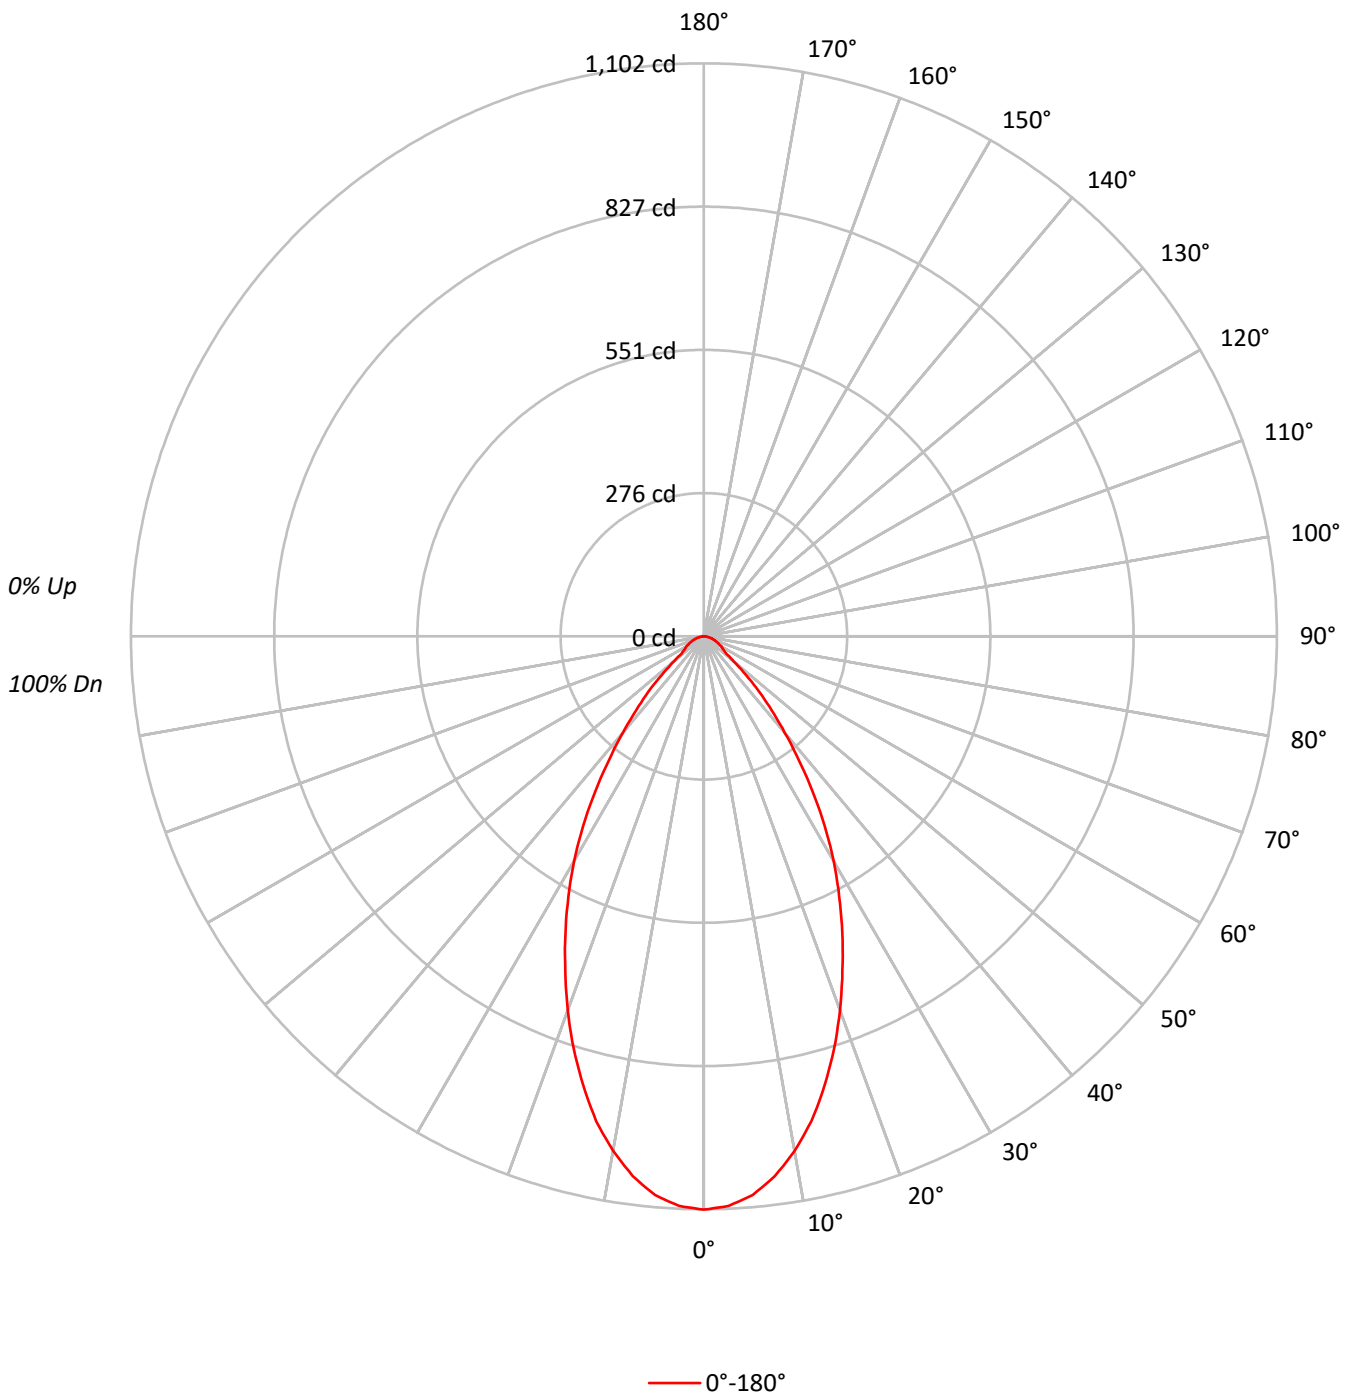



TEST NUMBER: P1301033

CATALOG NUMBER: P3AS17R40W2N902765DE010 E3DLD1WMH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			91
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69			69
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64			64
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59			59
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55			55
8	75	64	58	53	74	64	57	53	63	57	53	62	56	53	61	56	52	51			51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48			48
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45			45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	241757
5°	237376
10°	223754
15°	203247
20°	178539
25°	152477
30°	126323
35°	97413
40°	69330
45°	46703
50°	25483
55°	17968
60°	16928
65°	15618
70°	13913
75°	13302
80°	10607
85°	9057

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 46703 cd/sqm



TEST NUMBER: P1301033

CATALOG NUMBER: P3AS17R40W2N902765DE010 E3DLD1WMH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	100.6	9.3
10°-20°	249.4	23.2
20°-30°	288.3	26.8
30°-40°	227.2	21.1
40°-50°	116.6	10.8
50°-60°	44.6	4.1
60°-70°	29.5	2.7
70°-80°	16.0	1.5
80°-90°	4.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	638.3	59.3
0°-40°	865.5	80.4
0°-60°	1026.7	95.3
0°-90°	1077.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1077.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1102	
5°	1078	101
15°	895	249
25°	630	288
35°	364	227
45°	151	117
55°	47	45
65°	30	29
75°	16	16
85°	4	5
90°	0	



TEST NUMBER: P1301033  
CATALOG NUMBER: P3AS17R40W2N902765DE010 E3DLD1WMH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1102.5
2.5°	1096.5
5°	1078.4
7.5°	1047.1
10°	1004.9
12.5°	955.5
15°	895.3
17.5°	832.6
20°	765.1
22.5°	696.5
25°	630.2
27.5°	563.9
30°	498.9
32.5°	432.6
35°	363.9
37.5°	300.0
40°	242.2
42.5°	192.8
45°	150.6
47.5°	109.7
50°	74.7
52.5°	54.2
55°	47.0
57.5°	42.2
60°	38.6
62.5°	33.7
65°	30.1
67.5°	25.3
70°	21.7
72.5°	18.1
75°	15.7
77.5°	12.0
80°	8.4
82.5°	7.2
85°	3.6
87.5°	2.4
90°	0.0

(END OF REPORT)