

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301089

Luminaire Tested: P3AS17R45W2N902750DE010 E3CD1MB_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1301089
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R45W2N902750DE010 E3CD1MB_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 4000K CCT AND, 90CRI ,
E3CD1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1624.9 lumens
Efficiency: N/A
Efficacy: 83.8 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1301089
CATALOG NUMBER: P3AS17R45W2N902750DE010 E3CD1MB_4000K

Luminous Intensity Polar Plot

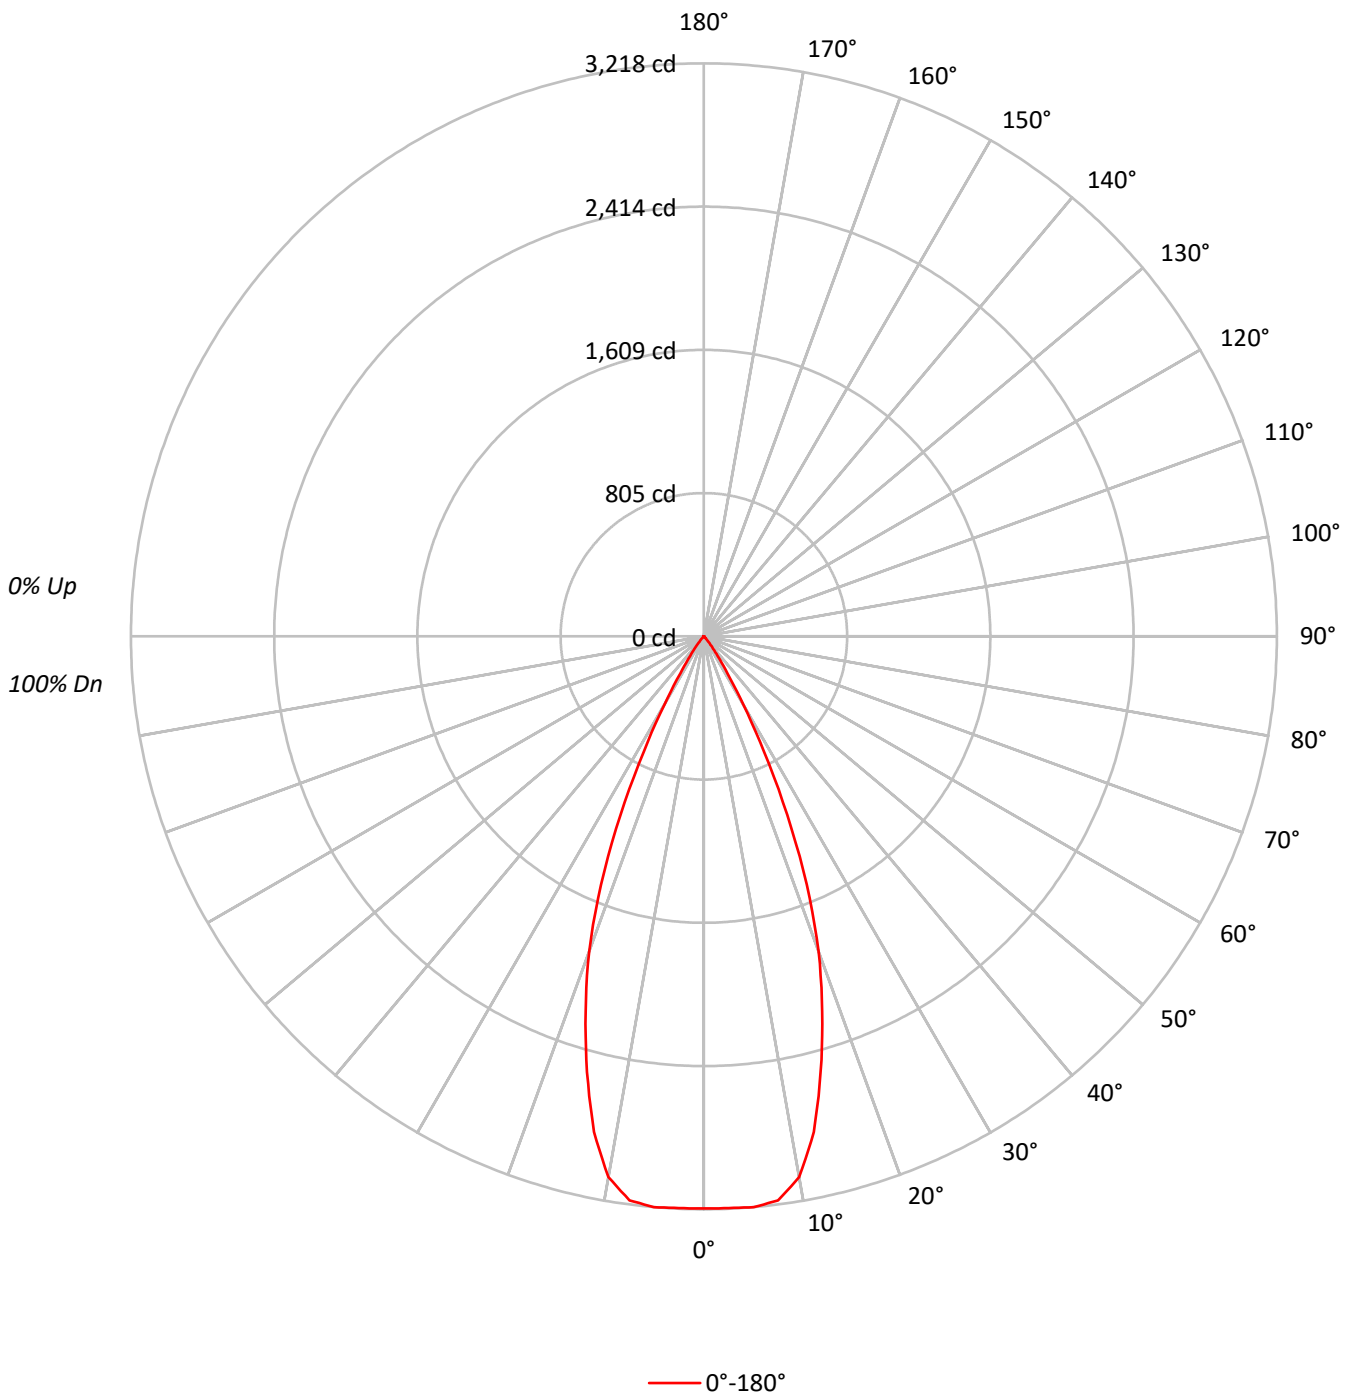



TEST NUMBER: P1301089

CATALOG NUMBER: P3AS17R45W2N902750DE010 E3CD1MB_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | |
| RCR | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 99 | 98 | 97 | 100 |
| 1 | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 99 | 98 | 97 | 95 | 95 | 94 | 92 | 95 |
| 2 | 110 | 106 | 102 | 100 | 108 | 104 | 101 | 98 | 101 | 98 | 96 | 98 | 96 | 94 | 95 | 94 | 92 | 91 | 92 | 90 | 88 | 87 |
| 3 | 106 | 100 | 96 | 93 | 104 | 99 | 95 | 92 | 96 | 93 | 91 | 94 | 91 | 89 | 92 | 90 | 88 | 87 | 92 | 90 | 88 | 87 |
| 4 | 102 | 95 | 91 | 87 | 100 | 94 | 90 | 87 | 92 | 89 | 86 | 90 | 87 | 85 | 88 | 86 | 84 | 83 | 88 | 86 | 84 | 83 |
| 5 | 98 | 91 | 86 | 82 | 96 | 90 | 85 | 82 | 88 | 84 | 81 | 87 | 83 | 81 | 85 | 82 | 80 | 79 | 85 | 82 | 80 | 79 |
| 6 | 94 | 87 | 82 | 78 | 93 | 86 | 81 | 78 | 85 | 80 | 77 | 83 | 80 | 77 | 82 | 79 | 76 | 75 | 82 | 79 | 76 | 75 |
| 7 | 90 | 83 | 78 | 74 | 89 | 82 | 78 | 74 | 81 | 77 | 74 | 80 | 76 | 74 | 79 | 76 | 73 | 72 | 79 | 76 | 73 | 72 |
| 8 | 87 | 79 | 74 | 71 | 86 | 79 | 74 | 71 | 78 | 74 | 71 | 77 | 73 | 70 | 76 | 73 | 70 | 69 | 76 | 73 | 70 | 69 |
| 9 | 84 | 76 | 71 | 68 | 83 | 76 | 71 | 68 | 75 | 71 | 68 | 74 | 70 | 67 | 73 | 70 | 67 | 66 | 73 | 70 | 67 | 66 |
| 10 | 81 | 73 | 68 | 65 | 80 | 73 | 68 | 65 | 72 | 68 | 65 | 71 | 67 | 65 | 71 | 67 | 65 | 64 | 71 | 67 | 65 | 64 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 704527 |
| 5° | 708275 |
| 10° | 686516 |
| 15° | 575304 |
| 20° | 439778 |
| 25° | 267717 |
| 30° | 111384 |
| 35° | 35683 |
| 40° | 11107 |
| 45° | 2264 |
| 50° | 1637 |
| 55° | 1835 |
| 60° | 1579 |
| 65° | 1868 |
| 70° | 1539 |
| 75° | 2033 |
| 80° | 1515 |
| 85° | 0 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2264 cd/sqm



TEST NUMBER: P1301089

CATALOG NUMBER: P3AS17R45W2N902750DE010 E3CD1MB_4000K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 303.5 | 18.7 |
| 10°-20° | 696.5 | 42.9 |
| 20°-30° | 501.5 | 30.9 |
| 30°-40° | 104.3 | 6.4 |
| 40°-50° | 9.5 | 0.6 |
| 50°-60° | 3.9 | 0.2 |
| 60°-70° | 3.1 | 0.2 |
| 70°-80° | 2.1 | 0.1 |
| 80°-90° | 0.5 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1501.5 | 92.4 |
| 0°-40° | 1605.8 | 98.8 |
| 0°-60° | 1619.2 | 99.7 |
| 0°-90° | 1624.9 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1624.9 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 3213 | |
| 5° | 3218 | 303 |
| 15° | 2534 | 697 |
| 25° | 1106 | 502 |
| 35° | 133 | 104 |
| 45° | 7 | 10 |
| 55° | 5 | 4 |
| 65° | 4 | 3 |
| 75° | 2 | 2 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P1301089

CATALOG NUMBER: P3AS17R45W2N902750DE010 E3CD1MB_4000K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 3212.9 |
| 2.5° | 3214.1 |
| 5° | 3217.7 |
| 7.5° | 3194.7 |
| 10° | 3083.2 |
| 12.5° | 2850.5 |
| 15° | 2534.2 |
| 17.5° | 2210.6 |
| 20° | 1884.6 |
| 22.5° | 1510.1 |
| 25° | 1106.5 |
| 27.5° | 729.6 |
| 30° | 439.9 |
| 32.5° | 246.0 |
| 35° | 133.3 |
| 37.5° | 75.1 |
| 40° | 38.8 |
| 42.5° | 17.0 |
| 45° | 7.3 |
| 47.5° | 4.8 |
| 50° | 4.8 |
| 52.5° | 4.8 |
| 55° | 4.8 |
| 57.5° | 3.6 |
| 60° | 3.6 |
| 62.5° | 3.6 |
| 65° | 3.6 |
| 67.5° | 2.4 |
| 70° | 2.4 |
| 72.5° | 2.4 |
| 75° | 2.4 |
| 77.5° | 1.2 |
| 80° | 1.2 |
| 82.5° | 1.2 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)