

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301153

Luminaire Tested: P3AS17R45W2N902750DE010 E3DLD1MW\_3500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1301153  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R45W2N902750DE010 E3DLD1MW\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 3500K CCT AND, 90CRI ,  
E3DLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1052.0 lumens  
Efficiency: N/A  
Efficacy: 54.2 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1301153  
CATALOG NUMBER: P3AS17R45W2N902750DE010 E3DLD1MW\_3500K

### Luminous Intensity Polar Plot

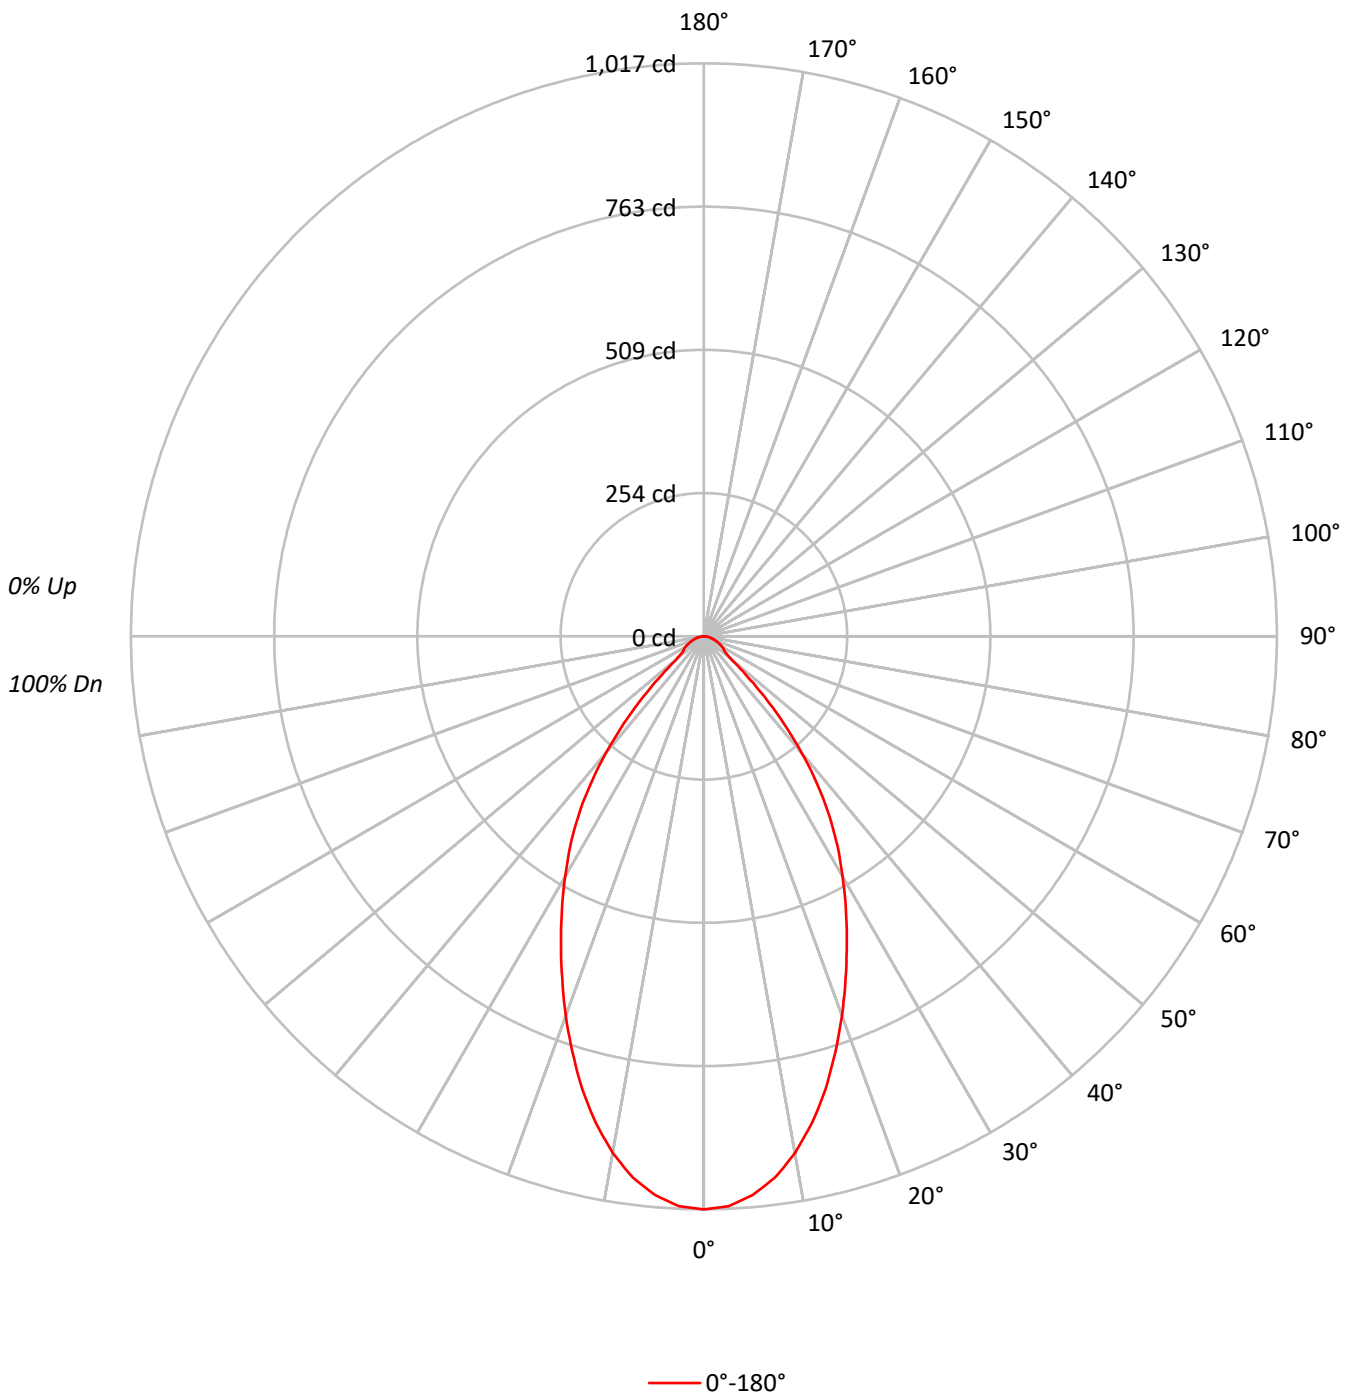



TEST NUMBER: P1301153  
 CATALOG NUMBER: P3AS17R45W2N902750DE010 E3DLD1MW\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			
3	99	92	86	82	97	90	85	81	88	83	80	85	81	78	83	80	77	75			
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69			
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63			
6	83	73	66	61	81	72	66	61	71	65	61	69	64	60	68	63	60	58			
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54			
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50			
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	52	48	47			
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	44			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	223052
5°	219106
10°	207322
15°	189082
20°	167198
25°	145194
30°	124627
35°	103865
40°	77402
45°	47385
50°	21935
55°	17165
60°	16490
65°	15099
70°	13977
75°	13386
80°	12249
85°	9057

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 47385 cd/sqm



TEST NUMBER: P1301153

CATALOG NUMBER: P3AS17R45W2N902750DE010 E3DLD1MW\_3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	93.0	8.8
10°-20°	231.9	22.0
20°-30°	275.5	26.2
30°-40°	239.4	22.8
40°-50°	120.1	11.4
50°-60°	41.7	4.0
60°-70°	29.2	2.8
70°-80°	16.3	1.6
80°-90°	4.9	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	600.4	57.1
0°-40°	839.8	79.8
0°-60°	1001.6	95.2
0°-90°	1052.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1052.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1017	
5°	995	93
15°	833	232
25°	600	276
35°	388	239
45°	153	120
55°	45	42
65°	29	29
75°	16	16
85°	4	5
90°	0	



TEST NUMBER: P1301153  
CATALOG NUMBER: P3AS17R45W2N902750DE010 E3DLD1MW\_3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1017.2
2.5°	1012.3
5°	995.4
7.5°	968.7
10°	931.1
12.5°	885.0
15°	832.9
17.5°	774.7
20°	716.5
22.5°	657.1
25°	600.1
27.5°	545.6
30°	492.2
32.5°	441.3
35°	388.0
37.5°	331.0
40°	270.4
42.5°	211.0
45°	152.8
47.5°	100.6
50°	64.3
52.5°	49.7
55°	44.9
57.5°	41.2
60°	37.6
62.5°	33.9
65°	29.1
67.5°	25.5
70°	21.8
72.5°	18.2
75°	15.8
77.5°	12.1
80°	9.7
82.5°	7.3
85°	3.6
87.5°	2.4
90°	0.0

(END OF REPORT)