

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301243

Luminaire Tested: P3AS17R45W2N902765DE010 E3DL1GPH\_6500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1301243  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-27)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R45W2N902765DE010 E3DL1GPH\_6500K  
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 6500K CCT AND, 90CRI ,  
E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 660.0 lumens  
Efficiency: N/A  
Efficacy: 34.0 lumens/watt  
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.69  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1301243  
CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DL1GPH\_6500K

### Luminous Intensity Polar Plot

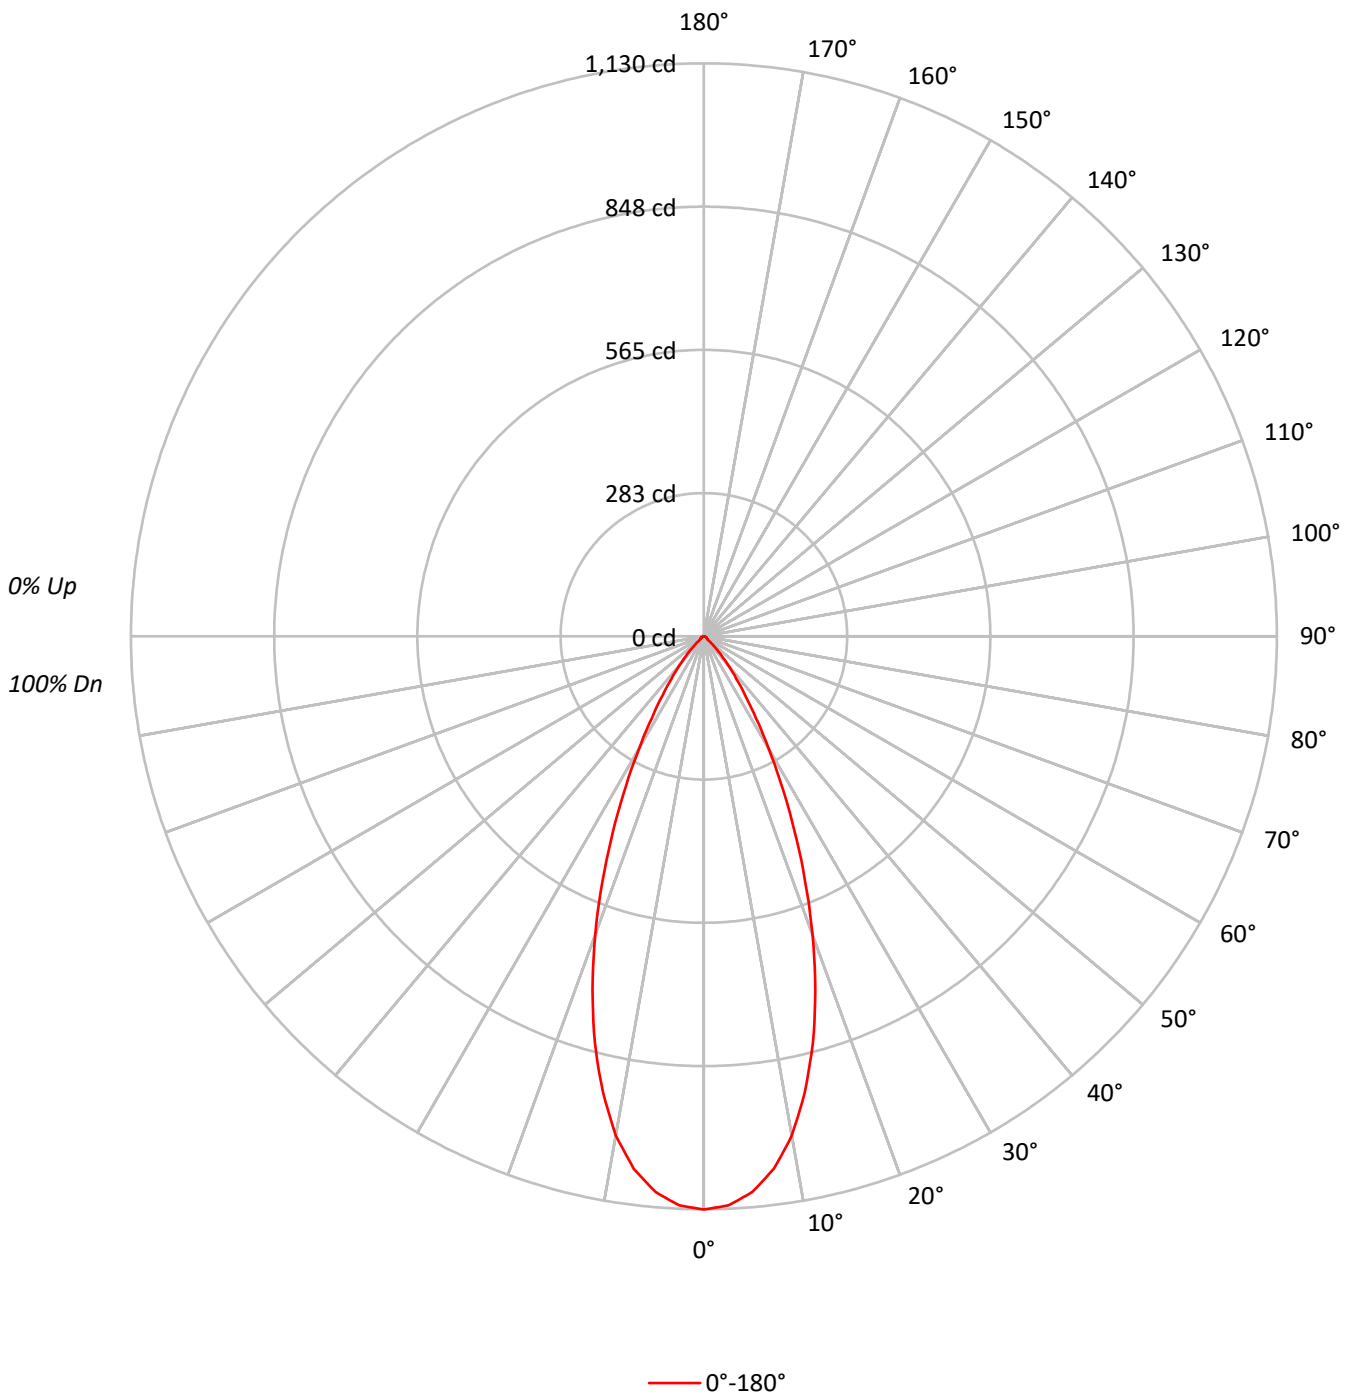





TEST NUMBER: P1301243

CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DL1GPH\_6500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	101.8	15.4
10°-20°	228.1	34.6
20°-30°	193.7	29.3
30°-40°	92.4	14.0
40°-50°	27.8	4.2
50°-60°	7.1	1.1
60°-70°	5.2	0.8
70°-80°	3.1	0.5
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	523.5	79.3
0°-40°	615.9	93.3
0°-60°	650.8	98.6
0°-90°	660.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	660.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1130	
5°	1100	102
15°	830	228
25°	423	194
35°	142	92
45°	34	28
55°	8	7
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1301243  
CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DL1GPH\_6500K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1130.3
2.5°	1123.2
5°	1099.6
7.5°	1058.9
10°	999.3
12.5°	920.2
15°	830.5
17.5°	730.7
20°	626.8
22.5°	521.2
25°	422.6
27.5°	332.9
30°	254.4
32.5°	191.2
35°	141.7
37.5°	104.5
40°	75.0
42.5°	51.9
45°	33.6
47.5°	18.9
50°	10.6
52.5°	8.3
55°	7.7
57.5°	7.1
60°	6.5
62.5°	5.9
65°	5.3
67.5°	4.7
70°	4.1
72.5°	3.5
75°	3.0
77.5°	2.4
80°	1.8
82.5°	1.2
85°	0.6
87.5°	0.6
90°	0.0

(END OF REPORT)