

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301245

Luminaire Tested: P3AS17R45W2N902765DE010 E3DL1H\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1301245  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-27)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R45W2N902765DE010 E3DL1H\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 3000K CCT AND, 90CRI ,  
E3DL1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1335.0 lumens  
Efficiency: N/A  
Efficacy: 68.8 lumens/watt  
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.69  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1301245  
CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DL1H\_3000K

### Luminous Intensity Polar Plot

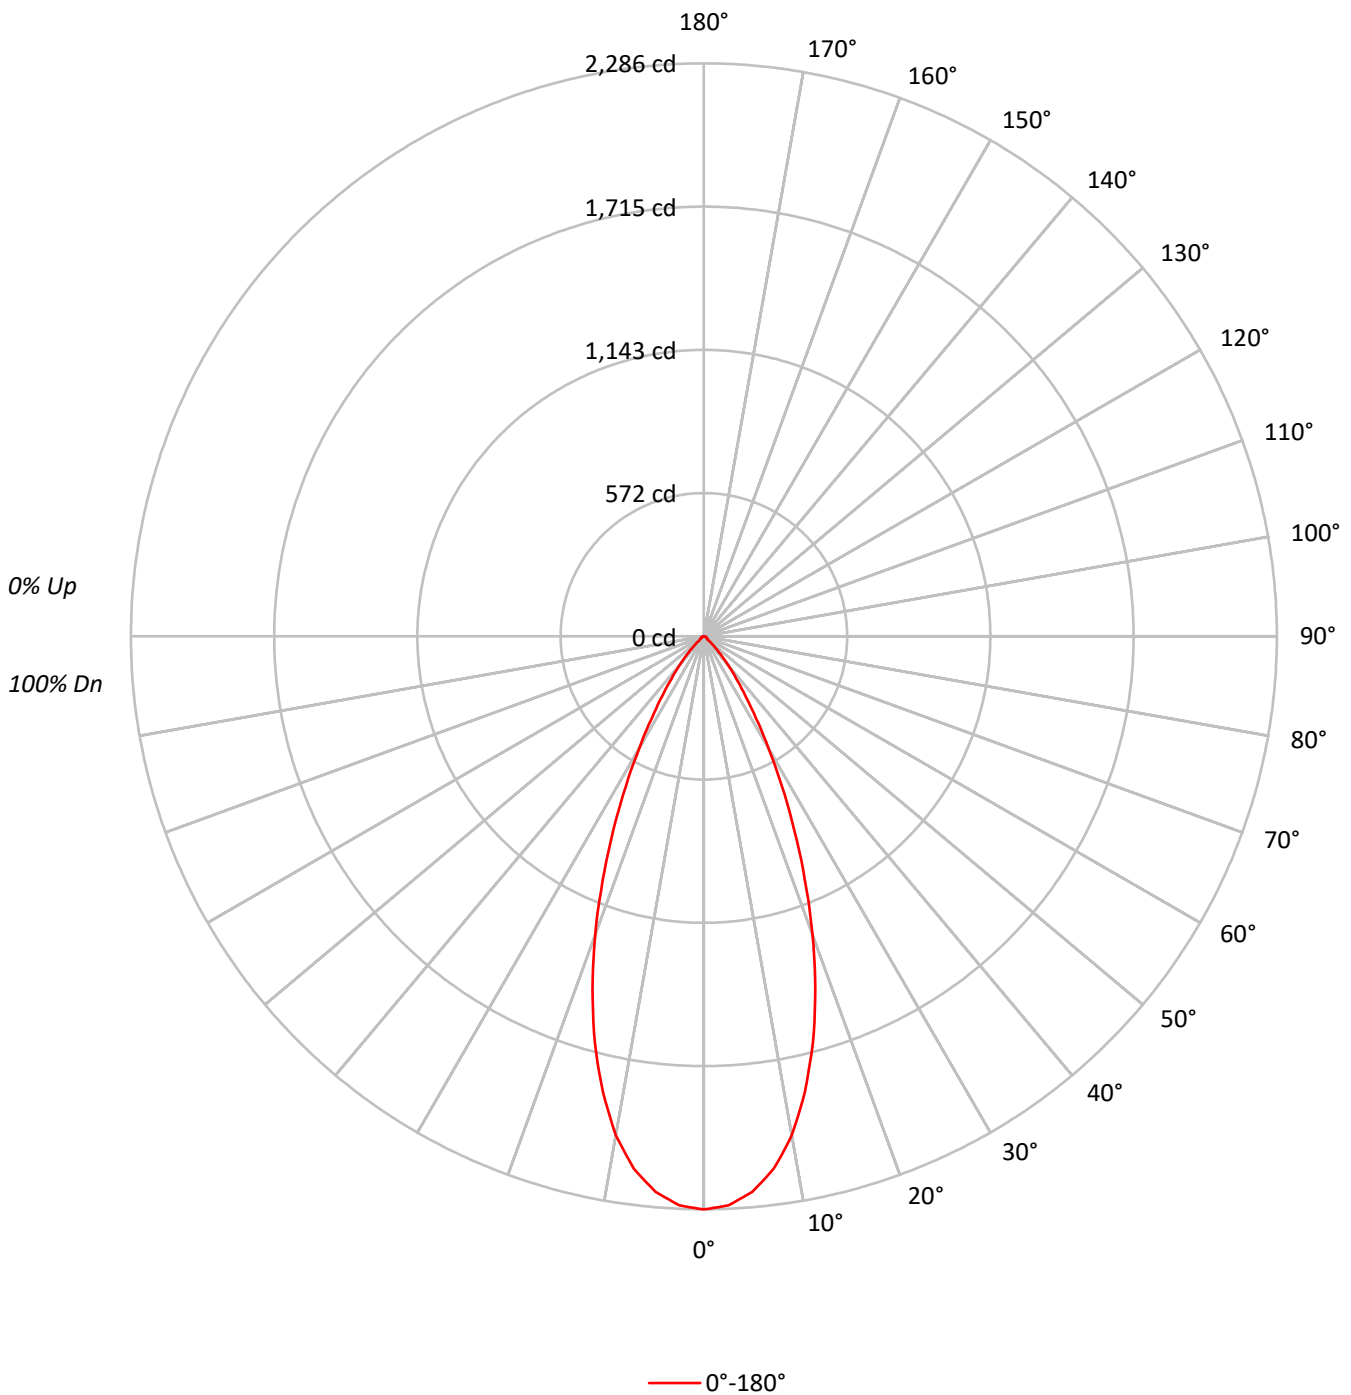



TEST NUMBER: P1301245  
 CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DL1H\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94	94	94	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88	88	88	88
3	104	98	93	89	102	96	92	88	94	90	87	91	88	86	89	86	84	83	83	83	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78	78	78	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74	74	74	74
6	90	82	76	73	89	81	76	72	80	75	72	78	74	71	77	74	71	70	70	70	70
7	86	78	72	68	85	77	72	68	76	71	68	75	71	67	74	70	67	66	66	66	66
8	83	74	68	65	82	73	68	64	72	68	64	71	67	64	70	67	64	62	62	62	62
9	79	70	65	61	78	70	65	61	69	64	61	68	64	61	67	63	61	59	59	59	59
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57	57	57	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	501341
5°	489587
10°	450047
15°	381342
20°	295869
25°	206818
30°	130299
35°	76694
40°	43396
45°	21118
50°	7335
55°	5926
60°	5745
65°	5552
70°	5386
75°	5083
80°	4546
85°	3019

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21118 cd/sqm



TEST NUMBER: P1301245

CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DL1H\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	205.9	15.4
10°-20°	461.3	34.6
20°-30°	391.7	29.3
30°-40°	186.8	14.0
40°-50°	56.3	4.2
50°-60°	14.2	1.1
60°-70°	10.6	0.8
70°-80°	6.3	0.5
80°-90°	1.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1058.9	79.3
0°-40°	1245.7	93.3
0°-60°	1316.3	98.6
0°-90°	1335.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1335.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2286	
5°	2224	206
15°	1680	461
25°	855	392
35°	286	187
45°	68	56
55°	16	14
65°	11	11
75°	6	6
85°	1	2
90°	0	



TEST NUMBER: P1301245  
CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DL1H\_3000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2286.3
2.5°	2272.0
5°	2224.2
7.5°	2141.8
10°	2021.2
12.5°	1861.3
15°	1679.8
17.5°	1478.0
20°	1267.9
22.5°	1054.2
25°	854.8
27.5°	673.4
30°	514.6
32.5°	386.8
35°	286.5
37.5°	211.3
40°	151.6
42.5°	105.1
45°	68.1
47.5°	38.2
50°	21.5
52.5°	16.7
55°	15.5
57.5°	14.3
60°	13.1
62.5°	11.9
65°	10.7
67.5°	9.6
70°	8.4
72.5°	7.2
75°	6.0
77.5°	4.8
80°	3.6
82.5°	2.4
85°	1.2
87.5°	1.2
90°	0.0

(END OF REPORT)