

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301297

Luminaire Tested: P3AS17R45W2N902765DE010 E3DLD1MW_6500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1301297
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R45W2N902765DE010 E3DLD1MW_6500K
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 6500K CCT AND, 90CRI ,
E3DLD1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1046.0 lumens
Efficiency: N/A
Efficacy: 53.9 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1301297
CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DLD1MW_6500K

Luminous Intensity Polar Plot

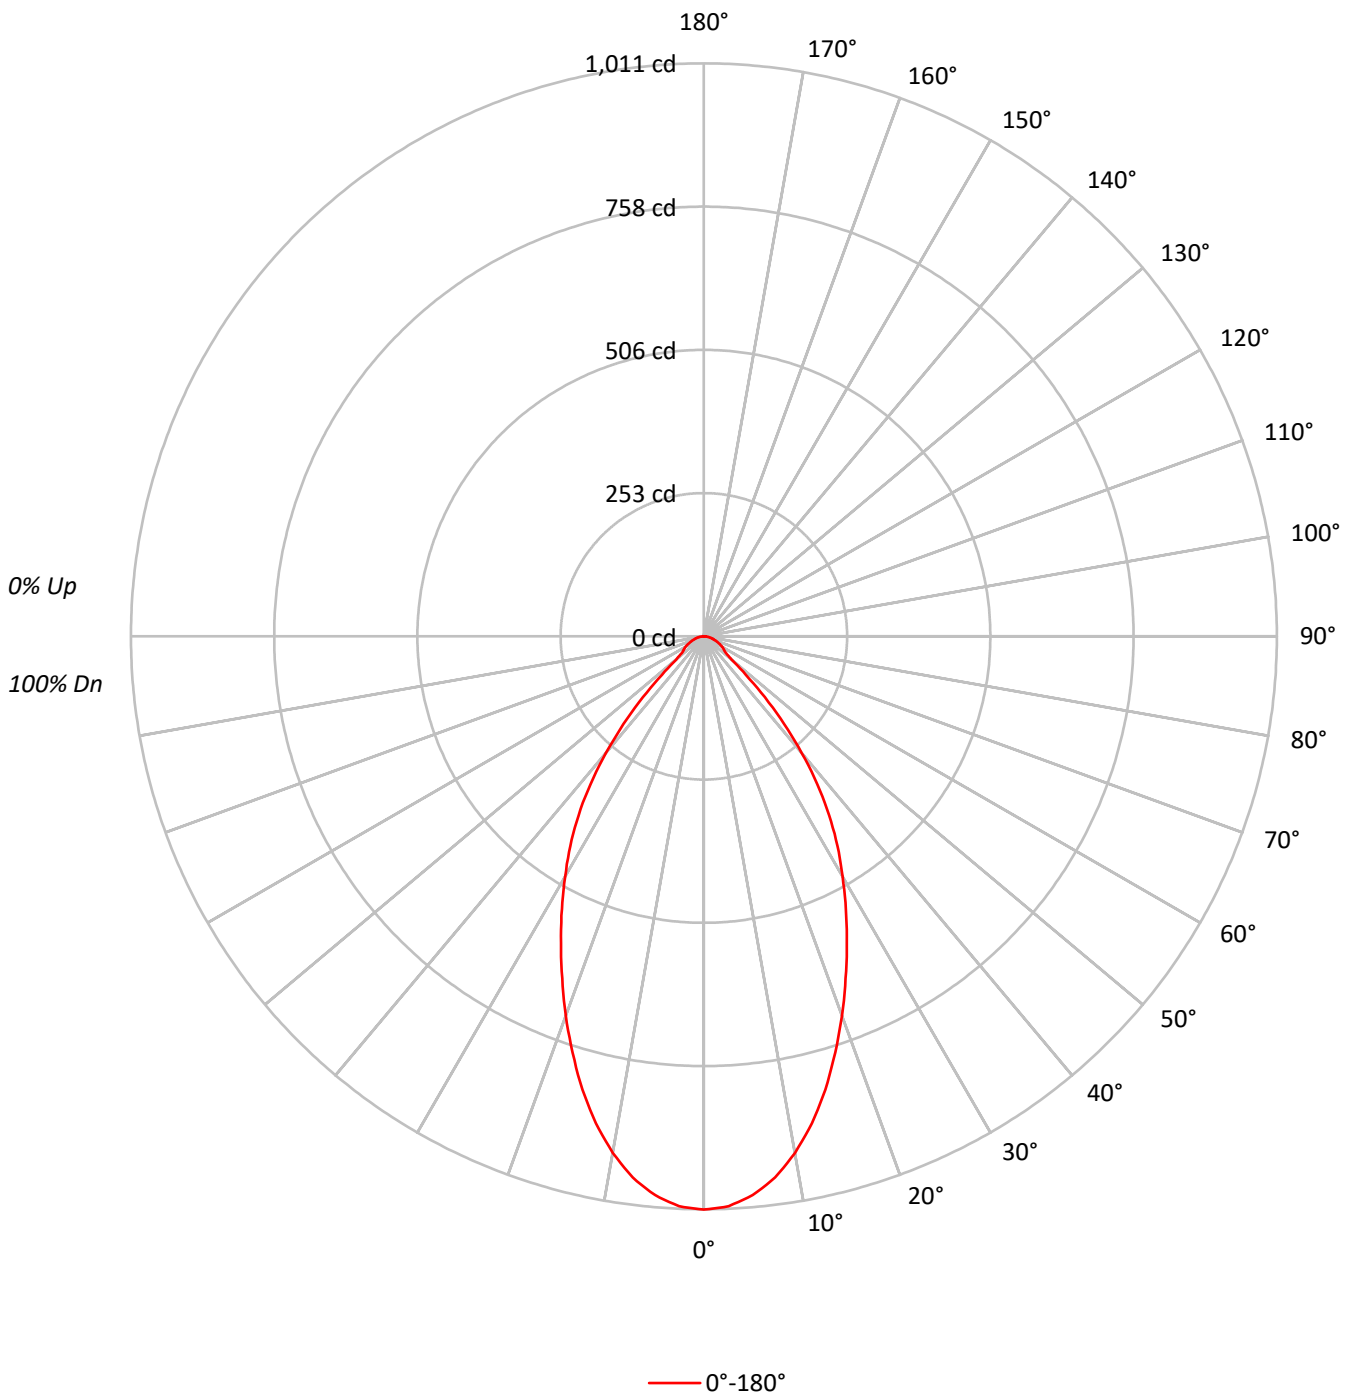



TEST NUMBER: P1301297

CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DLD1MW_6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91			91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			83
3	99	92	86	82	97	90	85	81	88	83	80	85	81	78	83	80	77	75			75
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69			69
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63			63
6	83	73	66	61	81	72	66	61	71	65	61	69	64	60	68	63	60	58			58
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54			54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50			50
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	52	48	47			47
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	44			44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	221780
5°	217851
10°	206142
15°	187992
20°	166241
25°	144371
30°	123918
35°	103249
40°	76944
45°	47106
50°	21799
55°	17051
60°	16402
65°	14995
70°	13913
75°	13302
80°	12123
85°	9057

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 47106 cd/sqm



TEST NUMBER: P1301297

CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DLD1MW_6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.5	8.8
10°-20°	230.6	22.0
20°-30°	274.0	26.2
30°-40°	238.0	22.8
40°-50°	119.4	11.4
50°-60°	41.4	4.0
60°-70°	29.1	2.8
70°-80°	16.2	1.6
80°-90°	4.9	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	597.0	57.1
0°-40°	835.0	79.8
0°-60°	995.8	95.2
0°-90°	1046.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1046.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1011	
5°	990	92
15°	828	231
25°	597	274
35°	386	238
45°	152	119
55°	45	41
65°	29	29
75°	16	16
85°	4	5
90°	0	



TEST NUMBER: P1301297
CATALOG NUMBER: P3AS17R45W2N902765DE010 E3DLD1MW_6500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1011.4
2.5°	1006.6
5°	989.7
7.5°	963.2
10°	925.8
12.5°	880.0
15°	828.1
17.5°	770.3
20°	712.4
22.5°	653.4
25°	596.7
27.5°	542.5
30°	489.4
32.5°	438.8
35°	385.7
37.5°	329.1
40°	268.8
42.5°	209.7
45°	151.9
47.5°	100.1
50°	63.9
52.5°	49.4
55°	44.6
57.5°	41.0
60°	37.4
62.5°	33.8
65°	28.9
67.5°	25.3
70°	21.7
72.5°	18.1
75°	15.7
77.5°	12.1
80°	9.6
82.5°	7.2
85°	3.6
87.5°	2.4
90°	0.0

(END OF REPORT)