

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301402

Luminaire Tested: P3AS17R50W2N902750DE010 E3DL1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1301402
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R50W2N902750DE010 E3DL1GPH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 3000K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 658.0 lumens
Efficiency: N/A
Efficacy: 33.9 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1301402
CATALOG NUMBER: P3AS17R50W2N902750DE010 E3DL1GPH_3000K

Luminous Intensity Polar Plot

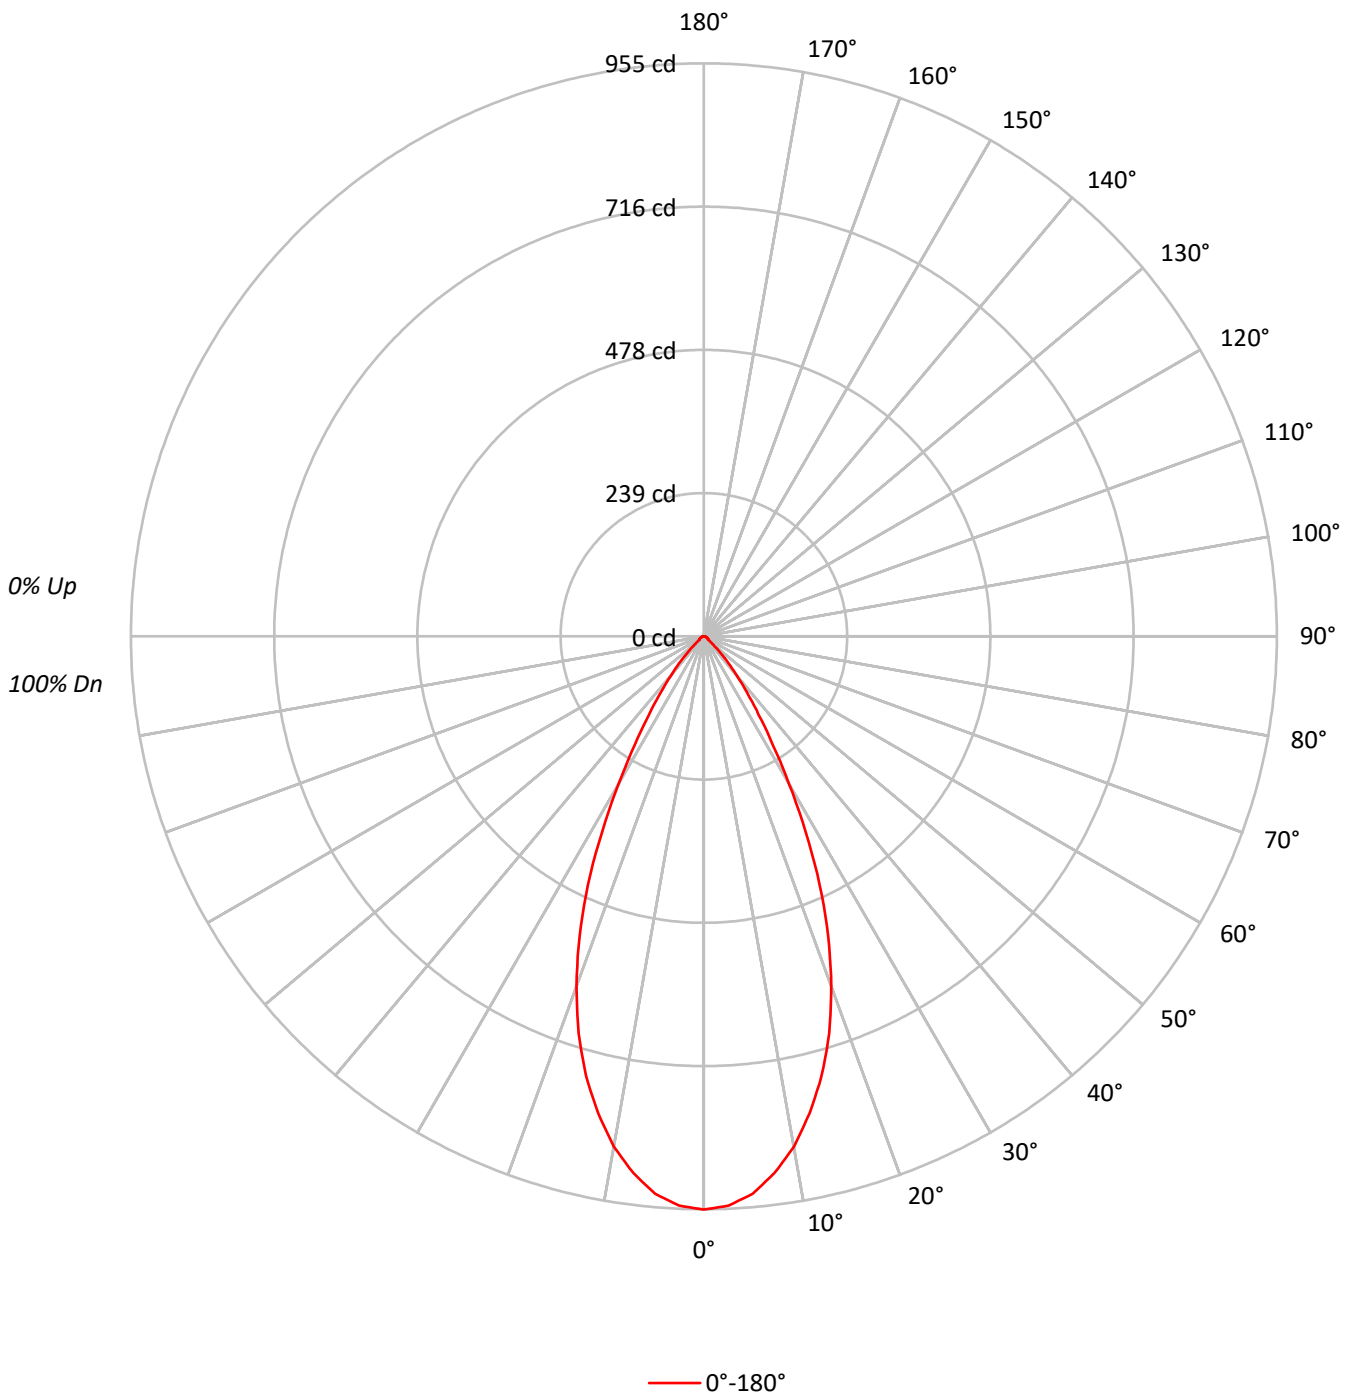



TEST NUMBER: P1301402

CATALOG NUMBER: P3AS17R50W2N902750DE010 E3DL1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.8	13.2
10°-20°	209.7	31.9
20°-30°	205.7	31.3
30°-40°	103.6	15.7
40°-50°	32.7	5.0
50°-60°	8.5	1.3
60°-70°	6.0	0.9
70°-80°	3.7	0.6
80°-90°	1.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	502.1	76.3
0°-40°	605.8	92.1
0°-60°	647.0	98.3
0°-90°	658.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	658.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	955	
5°	933	87
15°	758	210
25°	457	206
35°	159	104
45°	40	33
55°	9	8
65°	6	6
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1301402
CATALOG NUMBER: P3AS17R50W2N902750DE010 E3DL1GPH_3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	955.4
2.5°	949.5
5°	932.6
7.5°	902.1
10°	863.5
12.5°	813.8
15°	758.2
17.5°	693.9
20°	620.7
22.5°	541.7
25°	456.9
27.5°	366.8
30°	283.7
32.5°	213.5
35°	159.1
37.5°	117.6
40°	86.0
42.5°	60.8
45°	39.8
47.5°	22.8
50°	13.5
52.5°	9.9
55°	9.4
57.5°	8.2
60°	7.6
62.5°	7.0
65°	5.9
67.5°	5.3
70°	4.7
72.5°	4.1
75°	3.5
77.5°	2.9
80°	2.3
82.5°	1.8
85°	1.2
87.5°	0.6
90°	0.0

(END OF REPORT)