

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301741

Luminaire Tested: P3AS17R55W2N902750DE010 E3DL1WH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1301741
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R55W2N902750DE010 E3DL1WH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 3000K CCT AND, 90CRI ,
E3DL1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 869.0 lumens
Efficiency: N/A
Efficacy: 44.8 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1301741
CATALOG NUMBER: P3AS17R55W2N902750DE010 E3DL1WH_3000K

Luminous Intensity Polar Plot

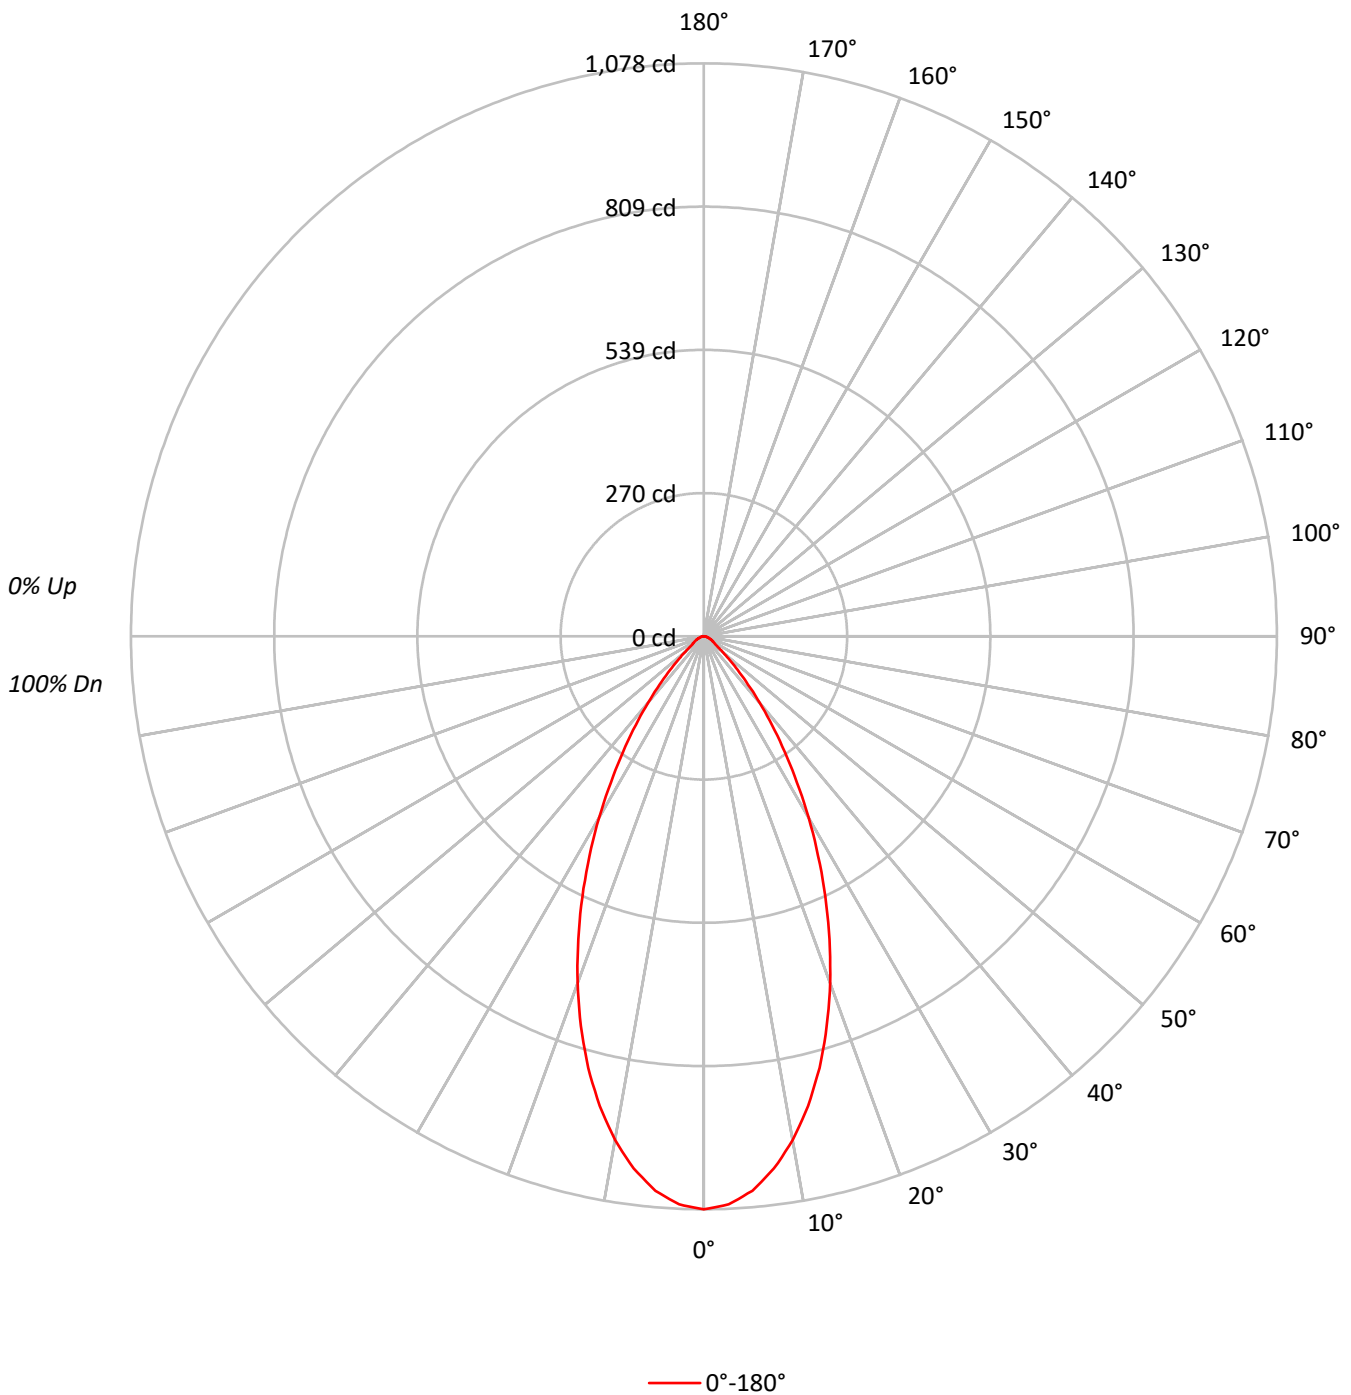



TEST NUMBER: P1301741

CATALOG NUMBER: P3AS17R55W2N902750DE010 E3DL1WH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92				92
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85				85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	79				79
4	96	88	82	77	94	87	81	77	84	80	76	82	78	75	80	77	74	73				73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67				67
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63				63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59				59
8	78	68	62	57	76	67	61	57	66	61	57	65	60	57	64	60	56	55				55
9	74	64	58	54	73	63	58	54	62	57	53	62	57	53	61	56	53	52				52
10	70	60	55	51	69	60	54	50	59	54	50	58	54	50	58	53	50	49				49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	236385
5°	230464
10°	214247
15°	190807
20°	162134
25°	130846
30°	99762
35°	70938
40°	46831
45°	27755
50°	16307
55°	10055
60°	8903
65°	8042
70°	6860
75°	6100
80°	6061
85°	6038

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 27755 cd/sqm



TEST NUMBER: P1301741

CATALOG NUMBER: P3AS17R55W2N902750DE010 E3DL1WH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.2	11.2
10°-20°	233.0	26.8
20°-30°	246.8	28.4
30°-40°	166.8	19.2
40°-50°	73.1	8.4
50°-60°	26.2	3.0
60°-70°	15.3	1.8
70°-80°	8.1	0.9
80°-90°	2.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	577.0	66.4
0°-40°	743.8	85.6
0°-60°	843.0	97.0
0°-90°	869.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	869.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1078	
5°	1047	97
15°	840	233
25°	541	247
35°	265	167
45°	90	73
55°	26	26
65°	16	15
75°	7	8
85°	2	3
90°	0	



TEST NUMBER: P1301741
CATALOG NUMBER: P3AS17R55W2N902750DE010 E3DL1WH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1078.0
2.5°	1069.7
5°	1047.0
7.5°	1010.0
10°	962.2
12.5°	904.9
15°	840.5
17.5°	768.8
20°	694.8
22.5°	617.2
25°	540.8
27.5°	465.6
30°	394.0
32.5°	325.9
35°	265.0
37.5°	210.1
40°	163.6
42.5°	123.0
45°	89.5
47.5°	65.7
50°	47.8
52.5°	33.4
55°	26.3
57.5°	23.9
60°	20.3
62.5°	17.9
65°	15.5
67.5°	13.1
70°	10.7
72.5°	9.6
75°	7.2
77.5°	6.0
80°	4.8
82.5°	3.6
85°	2.4
87.5°	1.2
90°	0.0

(END OF REPORT)