

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301782

Luminaire Tested: P3AS17R55W2N902750DE010 E3DLP1GPH\_3500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1301782  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRIS  
Catalog Number: P3AS17R55W2N902750DE010 E3DLP1GPH\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 3500K CCT AND, 90CRI ,  
E3DLP1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 432.0 lumens  
Efficiency: N/A  
Efficacy: 22.3 lumens/watt  
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1301782  
CATALOG NUMBER: P3AS17R55W2N902750DE010 E3DLP1GPH\_3500K

### Luminous Intensity Polar Plot

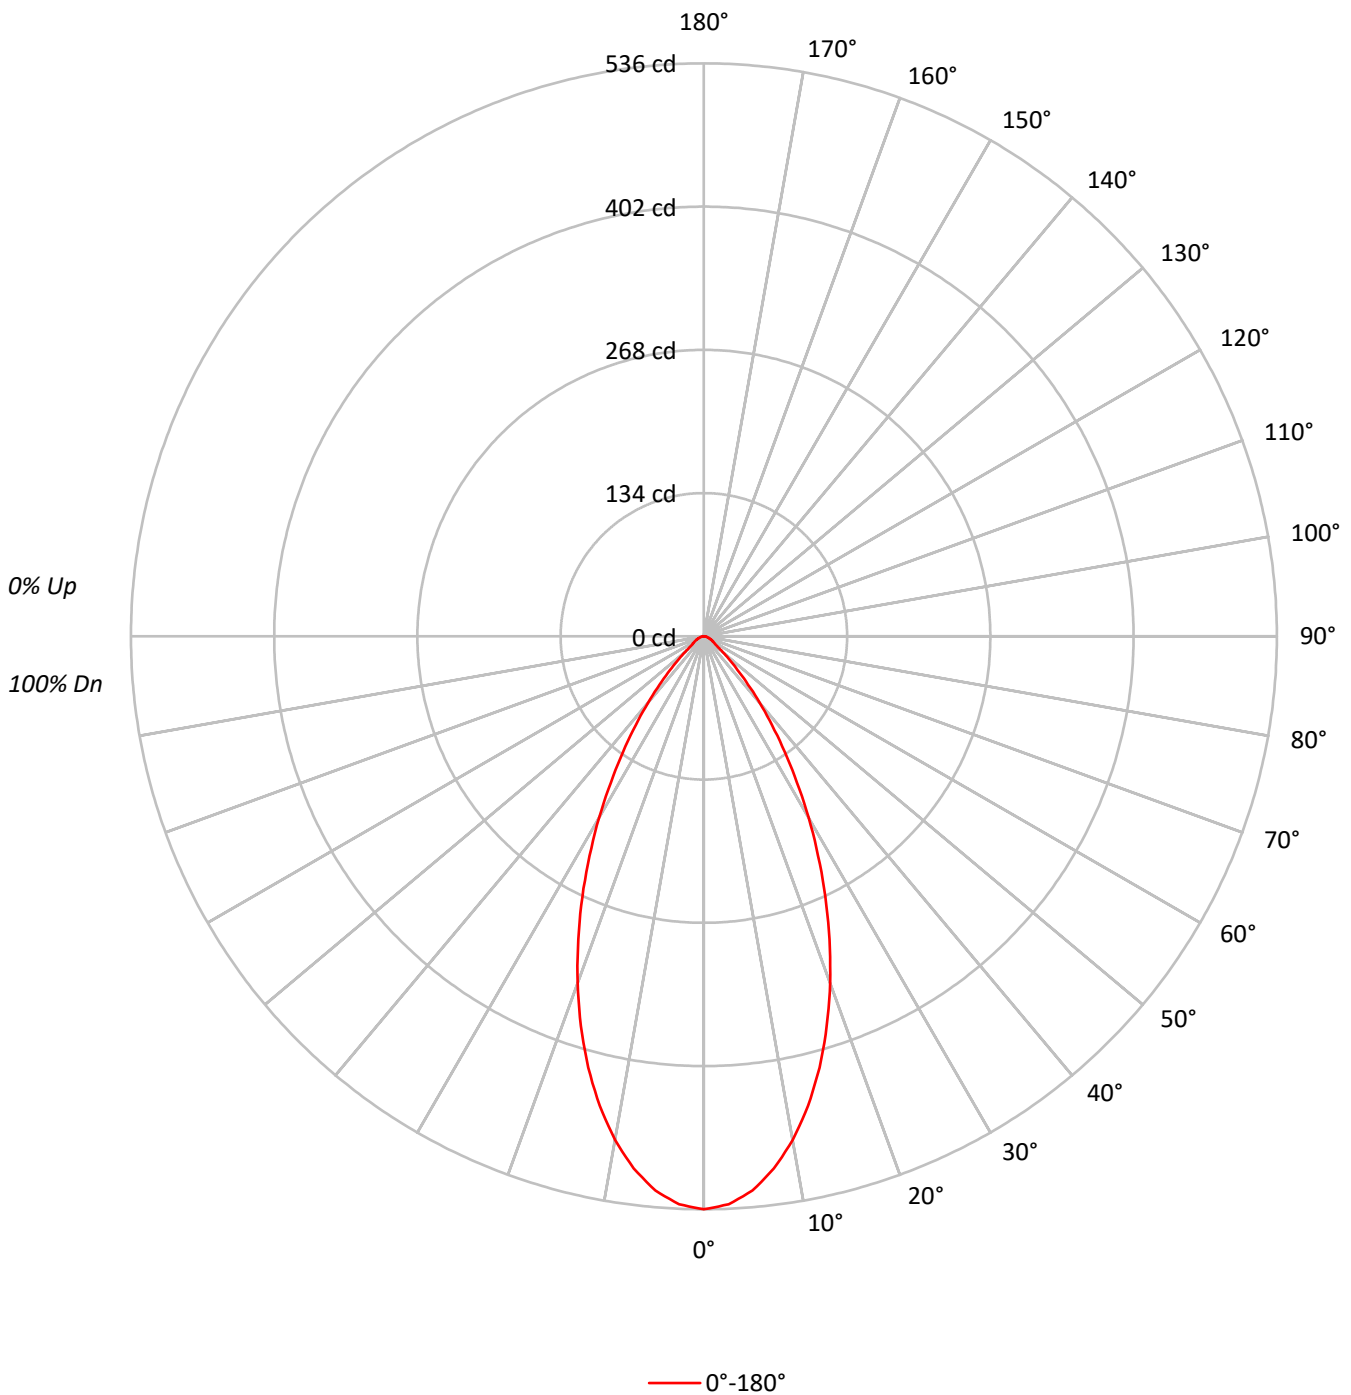





TEST NUMBER: P1301782

CATALOG NUMBER: P3AS17R55W2N902750DE010 E3DLP1GPH\_3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	48.3	11.2
10°-20°	115.8	26.8
20°-30°	122.7	28.4
30°-40°	82.9	19.2
40°-50°	36.3	8.4
50°-60°	13.0	3.0
60°-70°	7.6	1.8
70°-80°	4.0	0.9
80°-90°	1.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	286.9	66.4
0°-40°	369.8	85.6
0°-60°	419.1	97.0
0°-90°	432.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	432.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	536	
5°	520	48
15°	418	116
25°	269	123
35°	132	83
45°	44	36
55°	13	13
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1301782  
CATALOG NUMBER: P3AS17R55W2N902750DE010 E3DLP1GPH\_3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	535.9
2.5°	531.8
5°	520.5
7.5°	502.1
10°	478.4
12.5°	449.9
15°	417.8
17.5°	382.2
20°	345.4
22.5°	306.8
25°	268.9
27.5°	231.5
30°	195.9
32.5°	162.0
35°	131.8
37.5°	104.5
40°	81.3
42.5°	61.1
45°	44.5
47.5°	32.6
50°	23.7
52.5°	16.6
55°	13.1
57.5°	11.9
60°	10.1
62.5°	8.9
65°	7.7
67.5°	6.5
70°	5.3
72.5°	4.7
75°	3.6
77.5°	3.0
80°	2.4
82.5°	1.8
85°	1.2
87.5°	0.6
90°	0.0

(END OF REPORT)