

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302071

Luminaire Tested: P3AS17R60W2N902750DE010 E3DLD1GPH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302071
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R60W2N902750DE010 E3DLD1GPH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 3500K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 490.0 lumens
Efficiency: N/A
Efficacy: 25.3 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302071
CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLD1GPH_3500K

Luminous Intensity Polar Plot

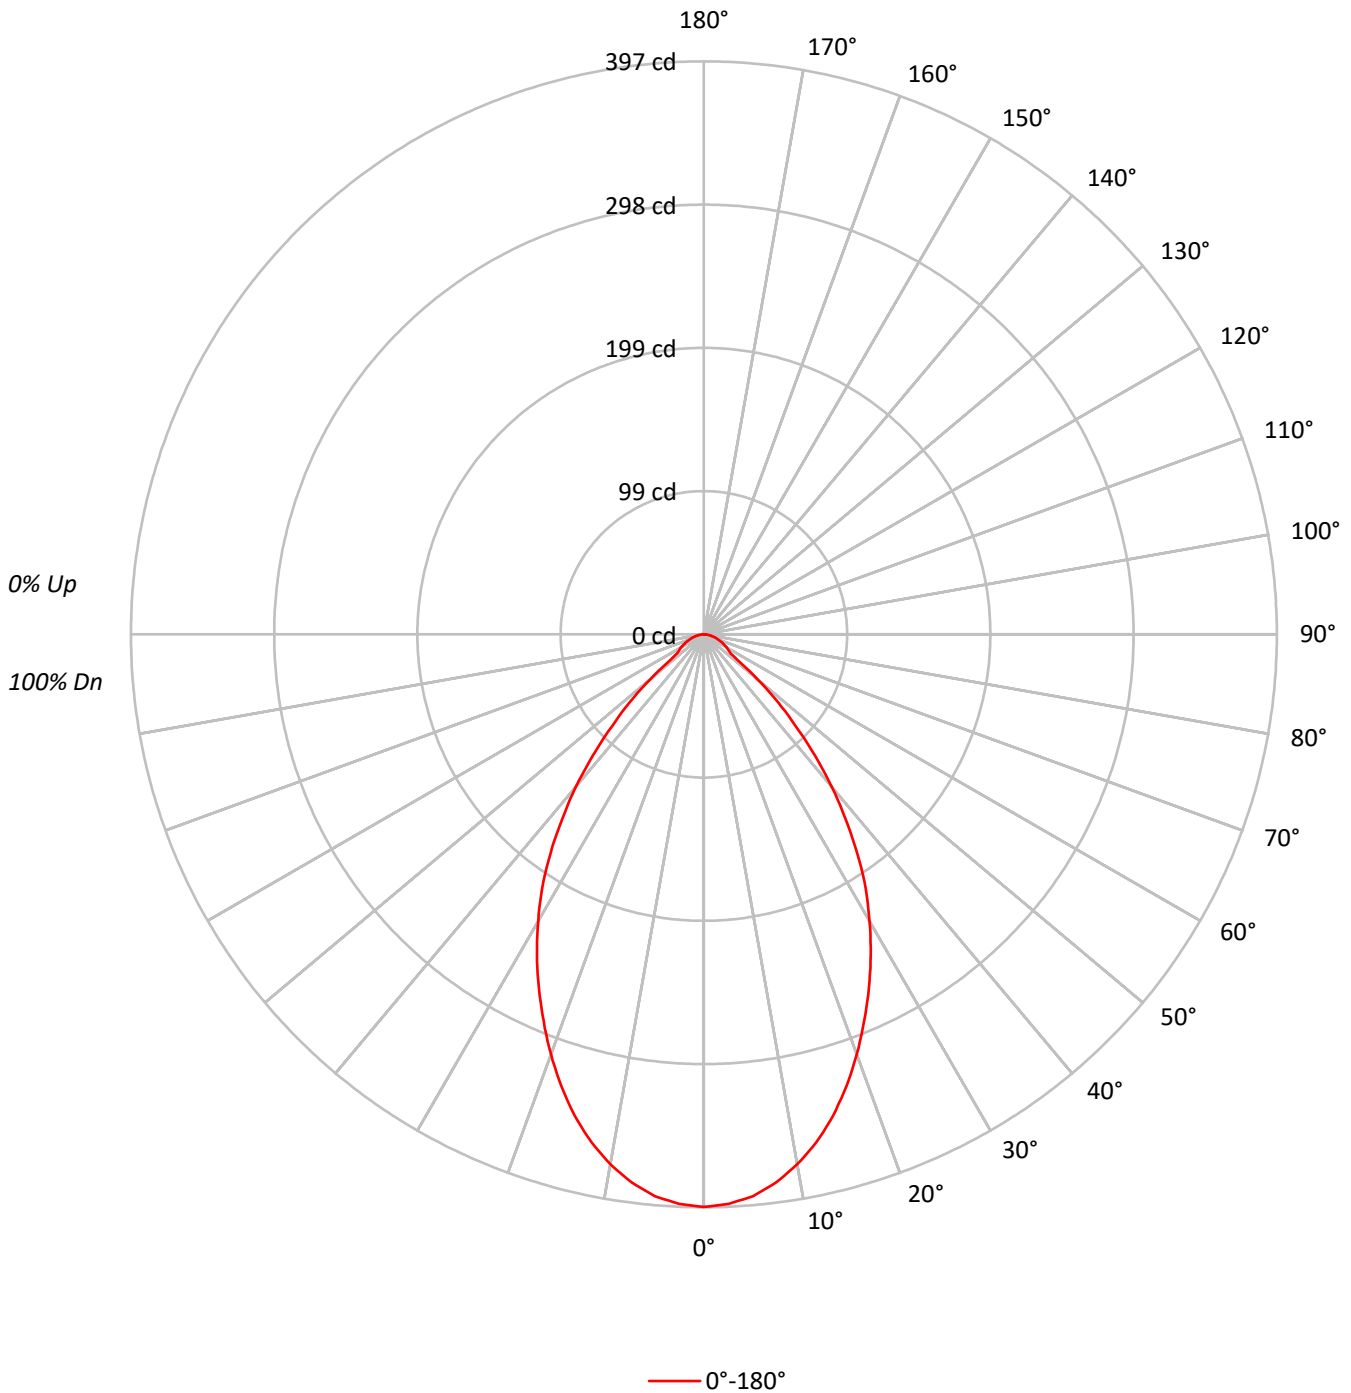



TEST NUMBER: P1302071
 CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLD1GPH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 101 | 102 | 100 | 98 | 99 | 97 | 95 | 95 | 94 | 93 | 91 |
| 2 | 105 | 99 | 94 | 90 | 103 | 97 | 93 | 89 | 94 | 90 | 87 | 91 | 88 | 85 | 88 | 86 | 84 | 82 |
| 3 | 99 | 91 | 85 | 80 | 96 | 89 | 84 | 79 | 87 | 82 | 78 | 84 | 80 | 77 | 82 | 78 | 76 | 74 |
| 4 | 92 | 83 | 77 | 72 | 90 | 82 | 76 | 71 | 80 | 75 | 70 | 78 | 73 | 70 | 76 | 72 | 69 | 67 |
| 5 | 87 | 77 | 70 | 65 | 85 | 76 | 69 | 65 | 74 | 68 | 64 | 72 | 67 | 63 | 71 | 66 | 63 | 61 |
| 6 | 82 | 71 | 64 | 59 | 80 | 70 | 64 | 59 | 69 | 63 | 58 | 67 | 62 | 58 | 66 | 61 | 58 | 56 |
| 7 | 77 | 66 | 59 | 54 | 75 | 65 | 59 | 54 | 64 | 58 | 54 | 63 | 57 | 53 | 61 | 57 | 53 | 51 |
| 8 | 72 | 61 | 55 | 50 | 71 | 61 | 54 | 50 | 60 | 54 | 49 | 59 | 53 | 49 | 58 | 53 | 49 | 47 |
| 9 | 68 | 57 | 51 | 46 | 67 | 57 | 50 | 46 | 56 | 50 | 46 | 55 | 49 | 46 | 54 | 49 | 45 | 44 |
| 10 | 65 | 54 | 47 | 43 | 64 | 53 | 47 | 43 | 52 | 47 | 43 | 52 | 46 | 42 | 51 | 46 | 42 | 41 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 86989 |
| 5° | 86000 |
| 10° | 83031 |
| 15° | 78434 |
| 20° | 72293 |
| 25° | 65472 |
| 30° | 58136 |
| 35° | 49657 |
| 40° | 39503 |
| 45° | 27848 |
| 50° | 16648 |
| 55° | 8411 |
| 60° | 8070 |
| 65° | 7420 |
| 70° | 6860 |
| 75° | 6524 |
| 80° | 6061 |
| 85° | 4529 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 27848 cd/sqm



TEST NUMBER: P1302071
 CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLD1GPH_3500K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 36.7 | 7.5 |
| 10°-20° | 96.6 | 19.7 |
| 20°-30° | 124.0 | 25.3 |
| 30°-40° | 115.0 | 23.5 |
| 40°-50° | 70.0 | 14.3 |
| 50°-60° | 23.3 | 4.8 |
| 60°-70° | 14.2 | 2.9 |
| 70°-80° | 8.0 | 1.6 |
| 80°-90° | 2.3 | 0.5 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 257.3 | 52.5 |
| 0°-40° | 372.2 | 76.0 |
| 0°-60° | 465.5 | 95.0 |
| 0°-90° | 490.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 490.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 397 | |
| 5° | 391 | 37 |
| 15° | 346 | 97 |
| 25° | 271 | 124 |
| 35° | 186 | 115 |
| 45° | 90 | 70 |
| 55° | 22 | 23 |
| 65° | 14 | 14 |
| 75° | 8 | 8 |
| 85° | 2 | 2 |
| 90° | 0 | |



TEST NUMBER: P1302071
CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLD1GPH_3500K

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 396.7 |
| 2.5° | 394.9 |
| 5° | 390.7 |
| 7.5° | 383.0 |
| 10° | 372.9 |
| 12.5° | 360.4 |
| 15° | 345.5 |
| 17.5° | 328.3 |
| 20° | 309.8 |
| 22.5° | 290.2 |
| 25° | 270.6 |
| 27.5° | 250.4 |
| 30° | 229.6 |
| 32.5° | 208.7 |
| 35° | 185.5 |
| 37.5° | 161.2 |
| 40° | 138.0 |
| 42.5° | 113.6 |
| 45° | 89.8 |
| 47.5° | 69.6 |
| 50° | 48.8 |
| 52.5° | 29.1 |
| 55° | 22.0 |
| 57.5° | 20.2 |
| 60° | 18.4 |
| 62.5° | 16.1 |
| 65° | 14.3 |
| 67.5° | 12.5 |
| 70° | 10.7 |
| 72.5° | 8.9 |
| 75° | 7.7 |
| 77.5° | 5.9 |
| 80° | 4.8 |
| 82.5° | 3.0 |
| 85° | 1.8 |
| 87.5° | 1.2 |
| 90° | 0.0 |

(END OF REPORT)