

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302128

Luminaire Tested: P3AS17R60W2N902750DE010 E3DLP1WMH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302128
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R60W2N902750DE010 E3DLP1WMH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 5000K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 875.9 lumens
Efficiency: N/A
Efficacy: 45.2 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302128
CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLP1WMH_5000K

Luminous Intensity Polar Plot

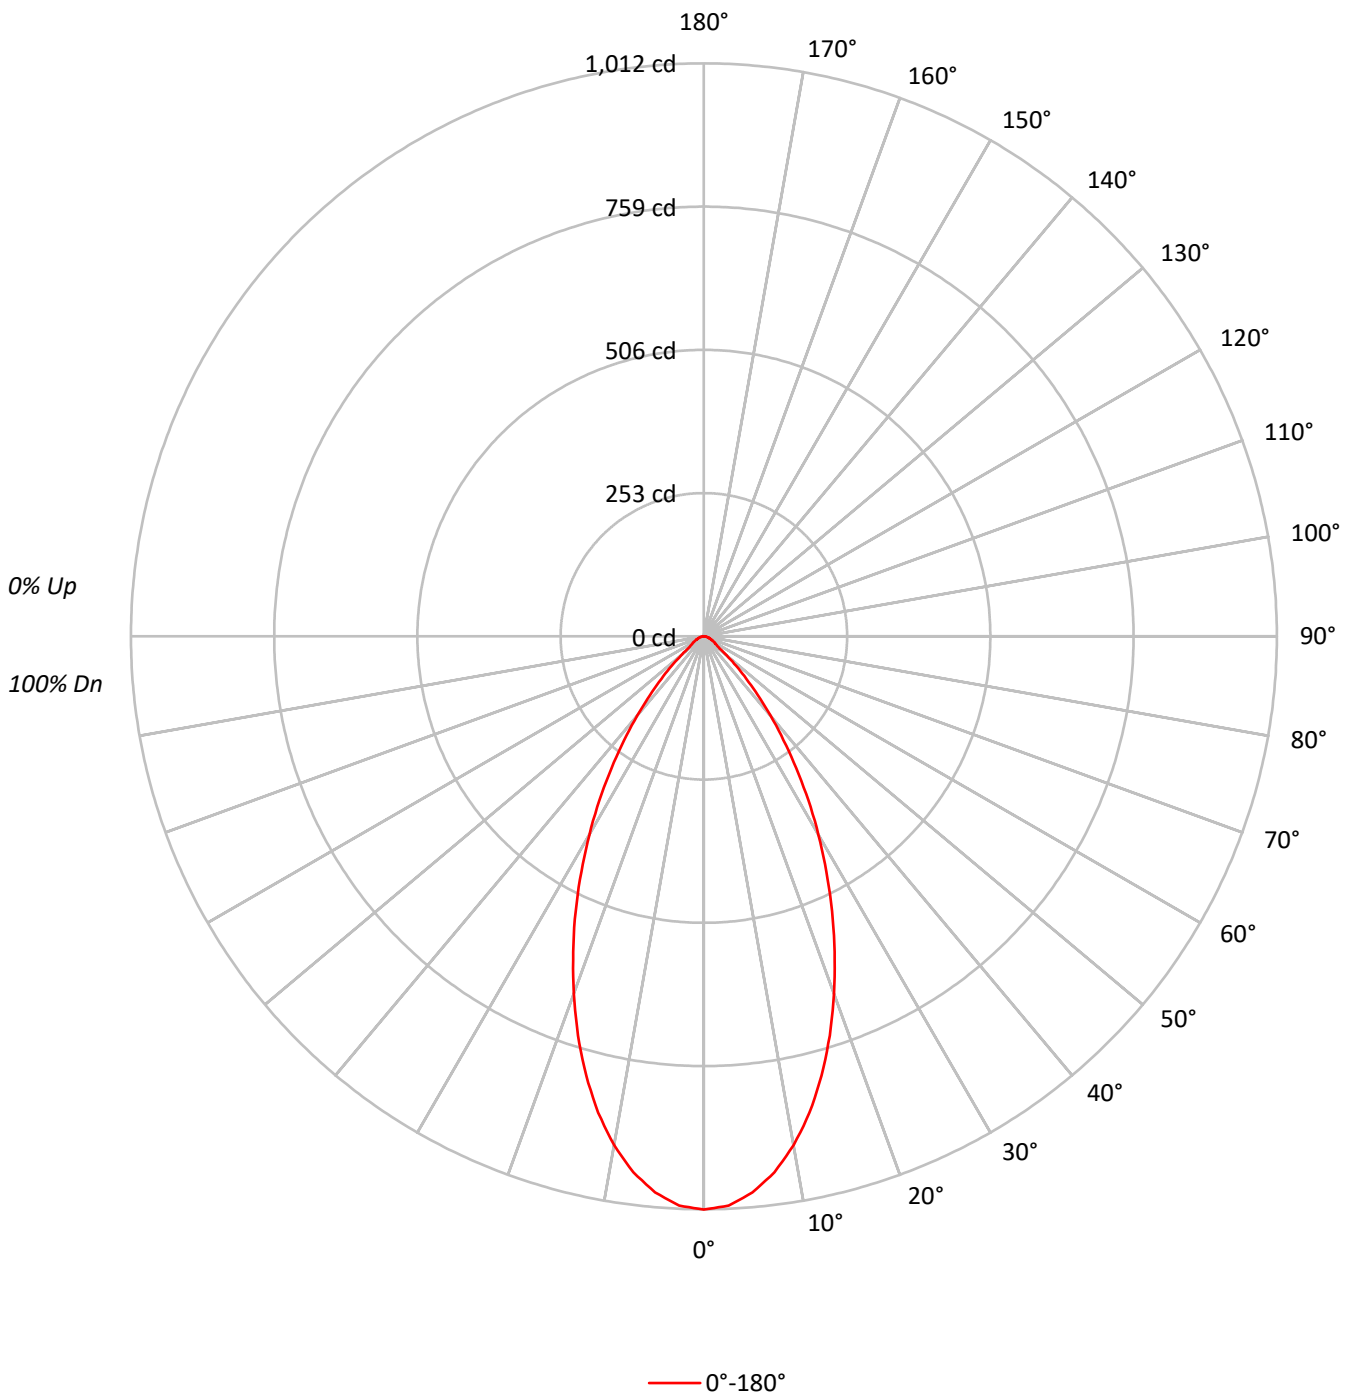



TEST NUMBER: P1302128

CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLP1WMH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92				92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85				85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78				78
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	73	72				72
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66				66
6	85	76	69	65	84	75	69	65	73	68	64	72	67	64	71	66	63	62				62
7	81	71	65	60	79	70	64	60	69	64	60	68	63	59	67	62	59	58				58
8	77	67	60	56	75	66	60	56	65	60	56	64	59	55	63	58	55	54				54
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50				50
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47				47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	222000
5°	217015
10°	203180
15°	182294
20°	156744
25°	129612
30°	102421
35°	76051
40°	52384
45°	32841
50°	18080
55°	10590
60°	9517
65°	8094
70°	6924
75°	7117
80°	6061
85°	6038

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 32841 cd/sqm



TEST NUMBER: P1302128

CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLP1WMH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.8	10.5
10°-20°	223.0	25.5
20°-30°	244.6	27.9
30°-40°	178.2	20.3
40°-50°	84.2	9.6
50°-60°	27.6	3.1
60°-70°	15.6	1.8
70°-80°	8.4	1.0
80°-90°	2.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	559.4	63.9
0°-40°	737.6	84.2
0°-60°	849.3	97.0
0°-90°	875.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	875.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1012	
5°	986	92
15°	803	223
25°	536	245
35°	284	178
45°	106	84
55°	28	28
65°	16	16
75°	8	8
85°	2	3
90°	0	



TEST NUMBER: P1302128
CATALOG NUMBER: P3AS17R60W2N902750DE010 E3DLP1WMH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1012.4
2.5°	1006.4
5°	985.9
7.5°	954.6
10°	912.5
12.5°	861.9
15°	803.0
17.5°	739.2
20°	671.7
22.5°	603.1
25°	535.7
27.5°	468.3
30°	404.5
32.5°	343.1
35°	284.1
37.5°	231.1
40°	183.0
42.5°	140.8
45°	105.9
47.5°	77.0
50°	53.0
52.5°	34.9
55°	27.7
57.5°	24.1
60°	21.7
62.5°	18.1
65°	15.6
67.5°	13.2
70°	10.8
72.5°	9.6
75°	8.4
77.5°	6.0
80°	4.8
82.5°	3.6
85°	2.4
87.5°	1.2
90°	0.0

(END OF REPORT)