

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302155

Luminaire Tested: P3AS17R60W2N902765DE010 E3CD1MMS_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302155
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R60W2N902765DE010 E3CD1MMS_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 3500K CCT AND, 90CRI ,
E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1566.9 lumens
Efficiency: N/A
Efficacy: 80.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302155
CATALOG NUMBER: P3AS17R60W2N902765DE010 E3CD1MMS_3500K

Luminous Intensity Polar Plot

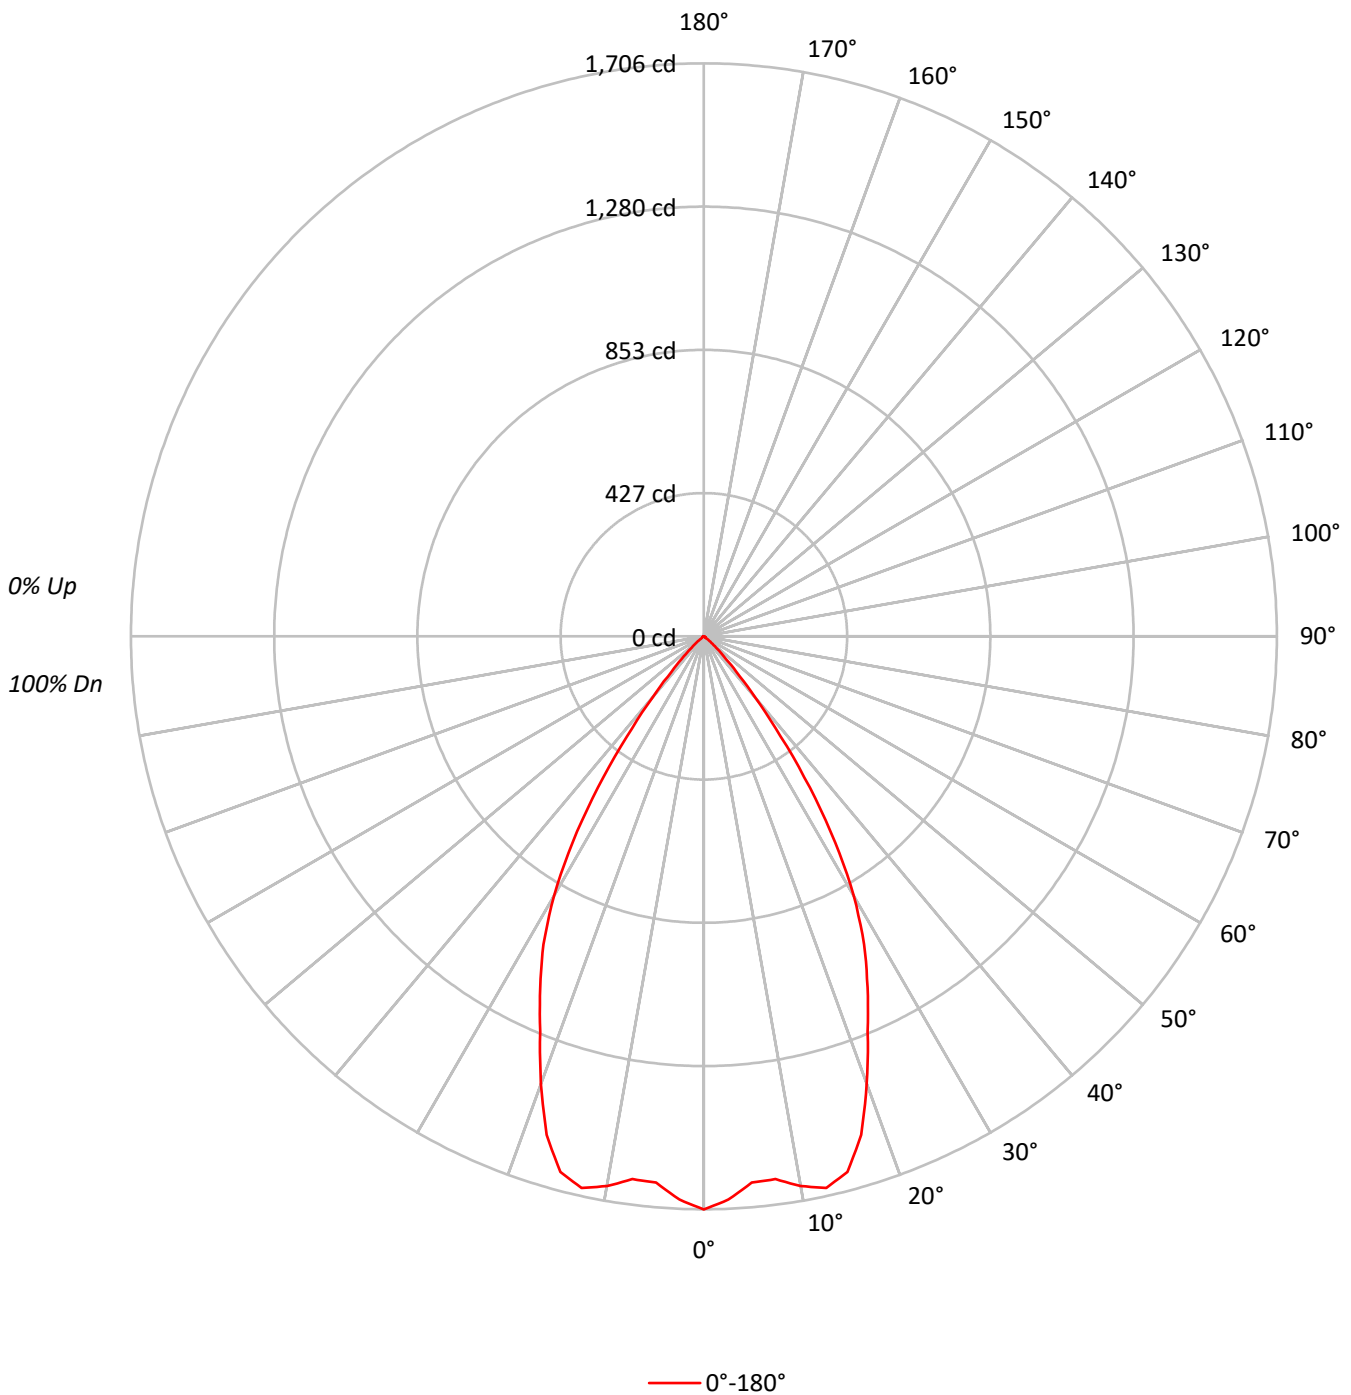



TEST NUMBER: P1302155
 CATALOG NUMBER: P3AS17R60W2N902765DE010 E3CD1MMS_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 114 | 111 | 108 | 106 | 111 | 109 | 106 | 104 | 105 | 103 | 101 | 101 | 100 | 98 | 97 | 96 | 95 | 94 | 94 | 94 | 94 |
| 2 | 108 | 103 | 99 | 96 | 106 | 102 | 98 | 95 | 98 | 95 | 93 | 95 | 93 | 91 | 93 | 91 | 89 | 87 | 87 | 87 | 87 |
| 3 | 103 | 96 | 91 | 88 | 101 | 95 | 90 | 87 | 92 | 89 | 85 | 90 | 87 | 84 | 88 | 85 | 83 | 81 | 81 | 81 | 81 |
| 4 | 98 | 90 | 85 | 81 | 96 | 89 | 84 | 80 | 87 | 83 | 79 | 85 | 81 | 78 | 83 | 80 | 77 | 76 | 76 | 76 | 76 |
| 5 | 93 | 84 | 79 | 74 | 91 | 84 | 78 | 74 | 82 | 77 | 73 | 80 | 76 | 73 | 79 | 75 | 72 | 71 | 71 | 71 | 71 |
| 6 | 88 | 79 | 73 | 69 | 87 | 79 | 73 | 69 | 77 | 72 | 68 | 76 | 71 | 68 | 74 | 70 | 68 | 66 | 66 | 66 | 66 |
| 7 | 84 | 75 | 69 | 64 | 82 | 74 | 68 | 64 | 73 | 68 | 64 | 71 | 67 | 64 | 70 | 66 | 63 | 62 | 62 | 62 | 62 |
| 8 | 80 | 70 | 64 | 60 | 78 | 70 | 64 | 60 | 69 | 64 | 60 | 68 | 63 | 60 | 67 | 63 | 59 | 58 | 58 | 58 | 58 |
| 9 | 76 | 66 | 61 | 57 | 75 | 66 | 60 | 56 | 65 | 60 | 56 | 64 | 59 | 56 | 63 | 59 | 56 | 55 | 55 | 55 | 55 |
| 10 | 72 | 63 | 57 | 53 | 71 | 62 | 57 | 53 | 62 | 56 | 53 | 61 | 56 | 53 | 60 | 56 | 53 | 51 | 51 | 51 | 51 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 374181 |
| 5° | 359343 |
| 10° | 369978 |
| 15° | 374735 |
| 20° | 330895 |
| 25° | 278871 |
| 30° | 226161 |
| 35° | 147284 |
| 40° | 67641 |
| 45° | 25925 |
| 50° | 8699 |
| 55° | 2332 |
| 60° | 2105 |
| 65° | 1868 |
| 70° | 1539 |
| 75° | 2033 |
| 80° | 1515 |
| 85° | 3019 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25925 cd/sqm



TEST NUMBER: P1302155
 CATALOG NUMBER: P3AS17R60W2N902765DE010 E3CD1MMS_3500K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 157.1 | 10.0 |
| 10°-20° | 452.0 | 28.8 |
| 20°-30° | 527.3 | 33.6 |
| 30°-40° | 340.2 | 21.7 |
| 40°-50° | 76.2 | 4.9 |
| 50°-60° | 7.6 | 0.5 |
| 60°-70° | 3.6 | 0.2 |
| 70°-80° | 2.1 | 0.1 |
| 80°-90° | 0.8 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1136.4 | 72.5 |
| 0°-40° | 1476.6 | 94.2 |
| 0°-60° | 1560.5 | 99.6 |
| 0°-90° | 1566.9 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1566.9 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 1706 | |
| 5° | 1632 | 157 |
| 15° | 1651 | 452 |
| 25° | 1153 | 527 |
| 35° | 550 | 340 |
| 45° | 84 | 76 |
| 55° | 6 | 8 |
| 65° | 4 | 4 |
| 75° | 2 | 2 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P1302155
CATALOG NUMBER: P3AS17R60W2N902765DE010 E3CD1MMS_3500K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 1706.4 |
| 2.5° | 1678.6 |
| 5° | 1632.5 |
| 7.5° | 1630.1 |
| 10° | 1661.6 |
| 12.5° | 1682.2 |
| 15° | 1650.7 |
| 17.5° | 1556.2 |
| 20° | 1418.0 |
| 22.5° | 1273.8 |
| 25° | 1152.6 |
| 27.5° | 1033.8 |
| 30° | 893.2 |
| 32.5° | 728.4 |
| 35° | 550.2 |
| 37.5° | 375.7 |
| 40° | 236.3 |
| 42.5° | 141.8 |
| 45° | 83.6 |
| 47.5° | 48.5 |
| 50° | 25.5 |
| 52.5° | 8.5 |
| 55° | 6.1 |
| 57.5° | 4.8 |
| 60° | 4.8 |
| 62.5° | 3.6 |
| 65° | 3.6 |
| 67.5° | 3.6 |
| 70° | 2.4 |
| 72.5° | 2.4 |
| 75° | 2.4 |
| 77.5° | 1.2 |
| 80° | 1.2 |
| 82.5° | 1.2 |
| 85° | 1.2 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)