

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302195

Luminaire Tested: P3AS17R60W2N902765DE010 E3DL1GPH\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1302195  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R60W2N902765DE010 E3DL1GPH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 2700K CCT AND, 90CRI ,  
E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 558.0 lumens  
Efficiency: N/A  
Efficacy: 28.8 lumens/watt  
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1302195  
CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1GPH\_2700K

### Luminous Intensity Polar Plot

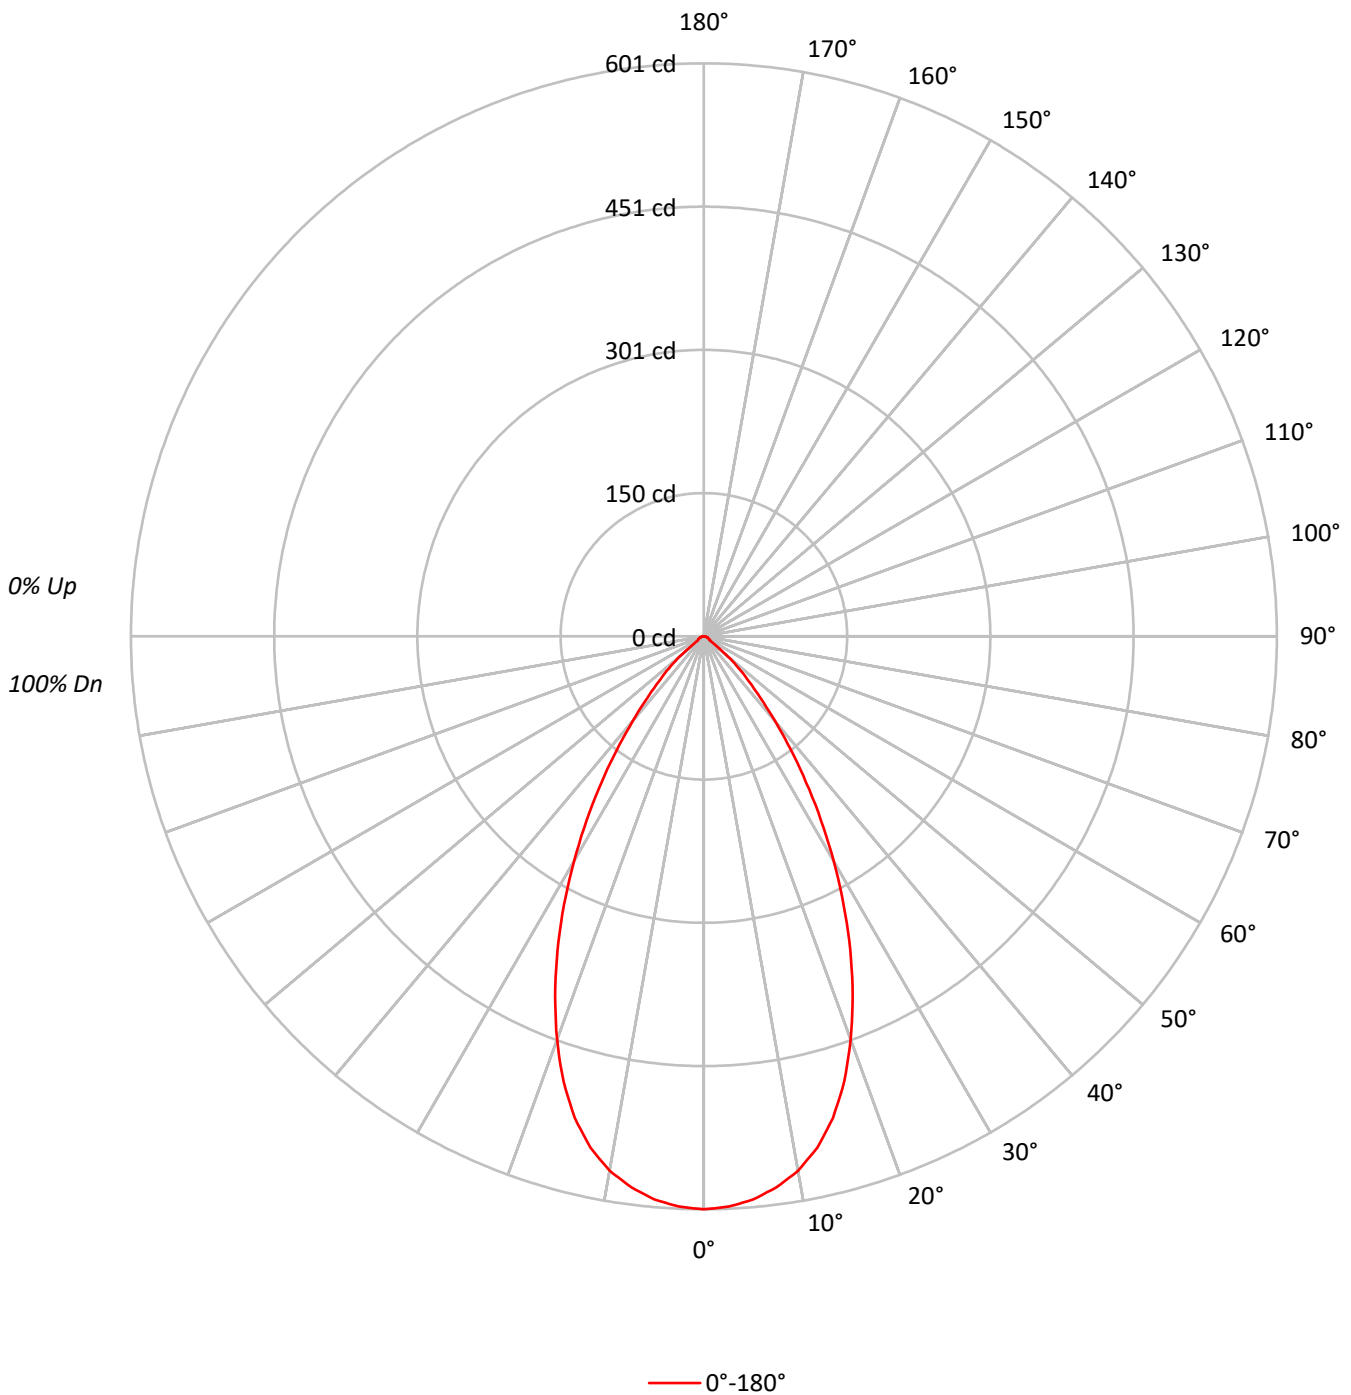





TEST NUMBER: P1302195

CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1GPH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	55.8	10.0
10°-20°	145.1	26.0
20°-30°	165.4	29.6
30°-40°	117.3	21.0
40°-50°	53.2	9.5
50°-60°	11.3	2.0
60°-70°	5.5	1.0
70°-80°	3.4	0.6
80°-90°	1.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	366.3	65.6
0°-40°	483.6	86.7
0°-60°	548.1	98.2
0°-90°	558.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	558.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	601	
5°	593	56
15°	523	145
25°	363	165
35°	187	117
45°	67	53
55°	8	11
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1302195  
CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1GPH\_2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	600.9
2.5°	598.8
5°	592.9
7.5°	582.9
10°	569.1
12.5°	549.4
15°	522.9
17.5°	489.5
20°	450.3
22.5°	407.8
25°	363.3
27.5°	317.7
30°	272.1
32.5°	228.6
35°	186.7
37.5°	149.6
40°	116.1
42.5°	88.0
45°	66.8
47.5°	49.9
50°	32.9
52.5°	15.4
55°	8.5
57.5°	7.4
60°	6.9
62.5°	6.4
65°	5.3
67.5°	4.8
70°	4.2
72.5°	3.7
75°	3.2
77.5°	2.7
80°	2.1
82.5°	1.6
85°	1.1
87.5°	0.5
90°	0.0

(END OF REPORT)