

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302213

Luminaire Tested: P3AS17R60W2N902765DE010 E3DL1MW_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302213
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R60W2N902765DE010 E3DL1MW_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 2700K CCT AND, 90CRI ,
E3DL1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1139.0 lumens
Efficiency: N/A
Efficacy: 58.7 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302213
CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1MW_2700K

Luminous Intensity Polar Plot

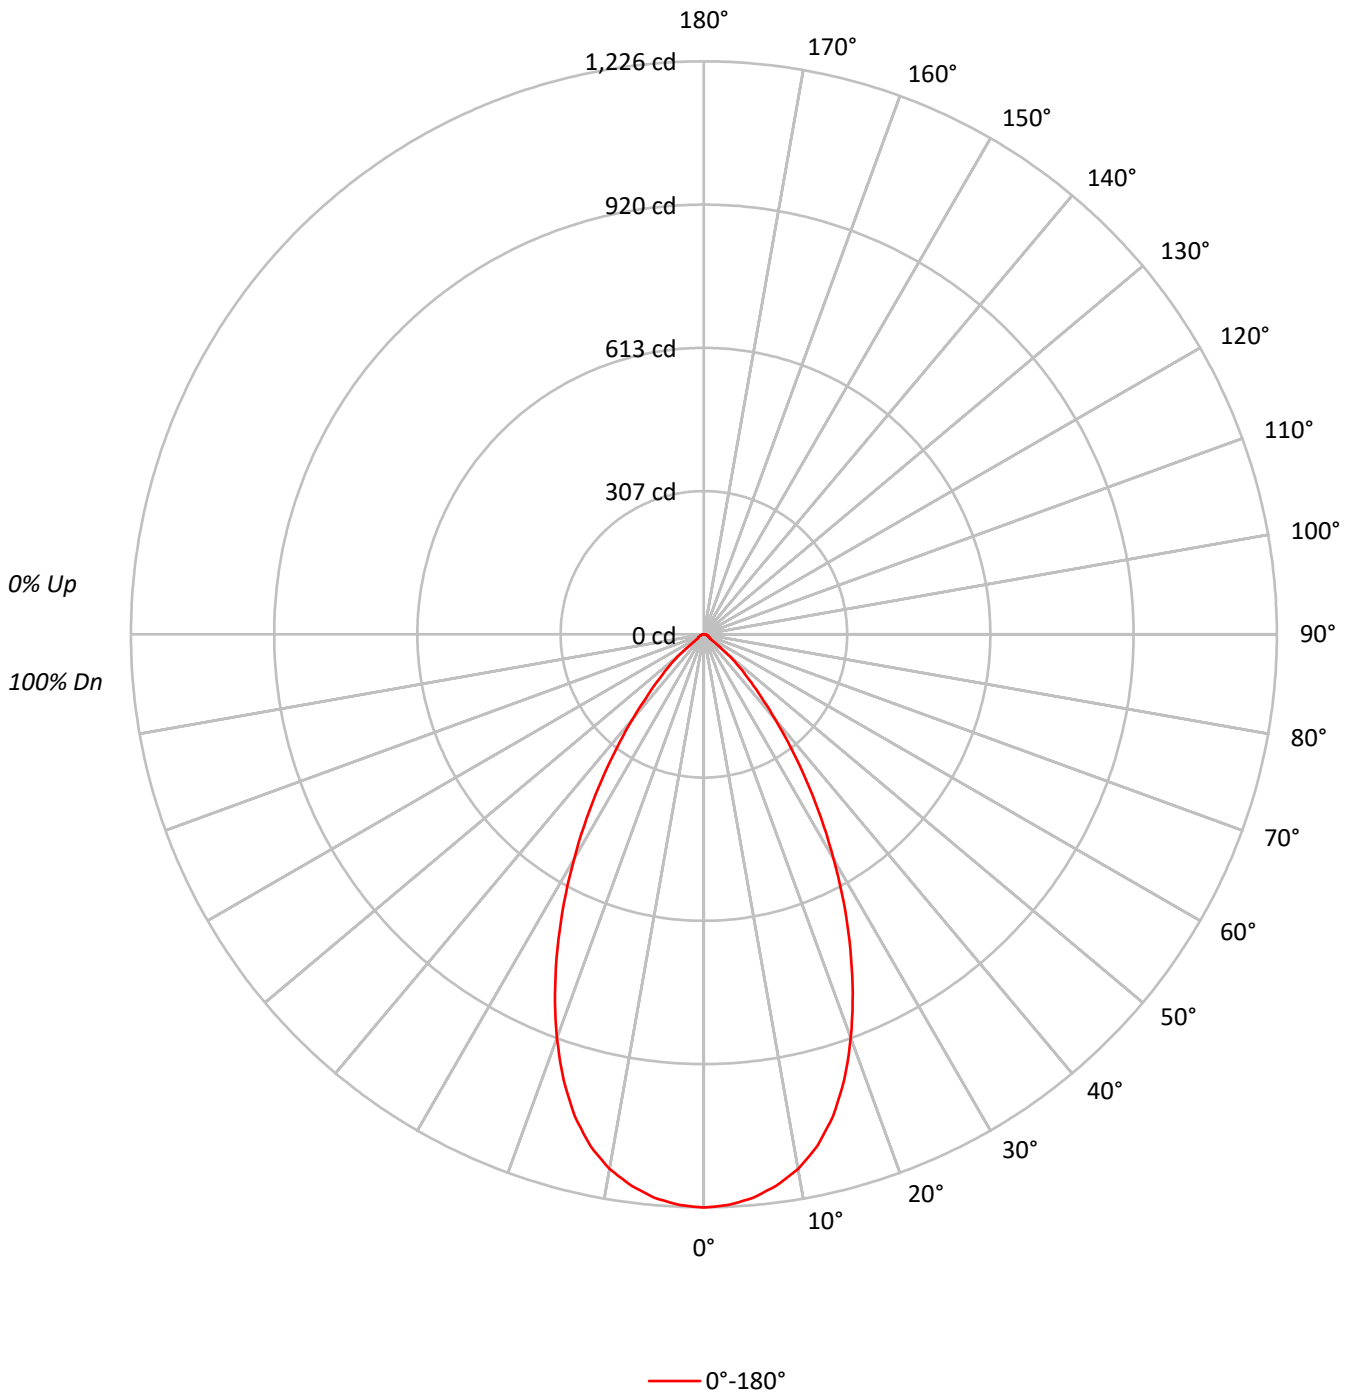



TEST NUMBER: P1302213

CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1MW_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85				85
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	80	79				79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73				73
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68				68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63				63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59				59
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55				55
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51				51
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48				48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	268948
5°	266409
10°	258646
15°	242317
20°	214475
25°	179406
30°	140604
35°	102018
40°	67870
45°	42299
50°	22891
55°	6614
60°	6184
65°	5604
70°	5578
75°	5507
80°	5430
85°	5535

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 42299 cd/sqm



TEST NUMBER: P1302213

CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1MW_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	114.0	10.0
10°-20°	296.1	26.0
20°-30°	337.5	29.6
30°-40°	239.4	21.0
40°-50°	108.6	9.5
50°-60°	23.0	2.0
60°-70°	11.1	1.0
70°-80°	6.9	0.6
80°-90°	2.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	747.6	65.6
0°-40°	987.0	86.7
0°-60°	1118.7	98.2
0°-90°	1139.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1139.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1226	
5°	1210	114
15°	1067	296
25°	742	338
35°	381	239
45°	136	109
55°	17	23
65°	11	11
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P1302213
CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DL1MW_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1226.5
2.5°	1222.2
5°	1210.3
7.5°	1189.7
10°	1161.6
12.5°	1121.5
15°	1067.4
17.5°	999.2
20°	919.1
22.5°	832.5
25°	741.5
27.5°	648.4
30°	555.3
32.5°	466.6
35°	381.1
37.5°	305.3
40°	237.1
42.5°	179.7
45°	136.4
47.5°	101.8
50°	67.1
52.5°	31.4
55°	17.3
57.5°	15.2
60°	14.1
62.5°	13.0
65°	10.8
67.5°	9.7
70°	8.7
72.5°	7.6
75°	6.5
77.5°	5.4
80°	4.3
82.5°	3.2
85°	2.2
87.5°	1.1
90°	0.0

(END OF REPORT)