

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302249

Luminaire Tested: P3AS17R60W2N902765DE010 E3DLD1MW_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302249
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R60W2N902765DE010 E3DLD1MW_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 2700K CCT AND, 90CRI ,
E3DLD1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 892.0 lumens
Efficiency: N/A
Efficacy: 46.0 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302249
CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DLD1MW_2700K

Luminous Intensity Polar Plot

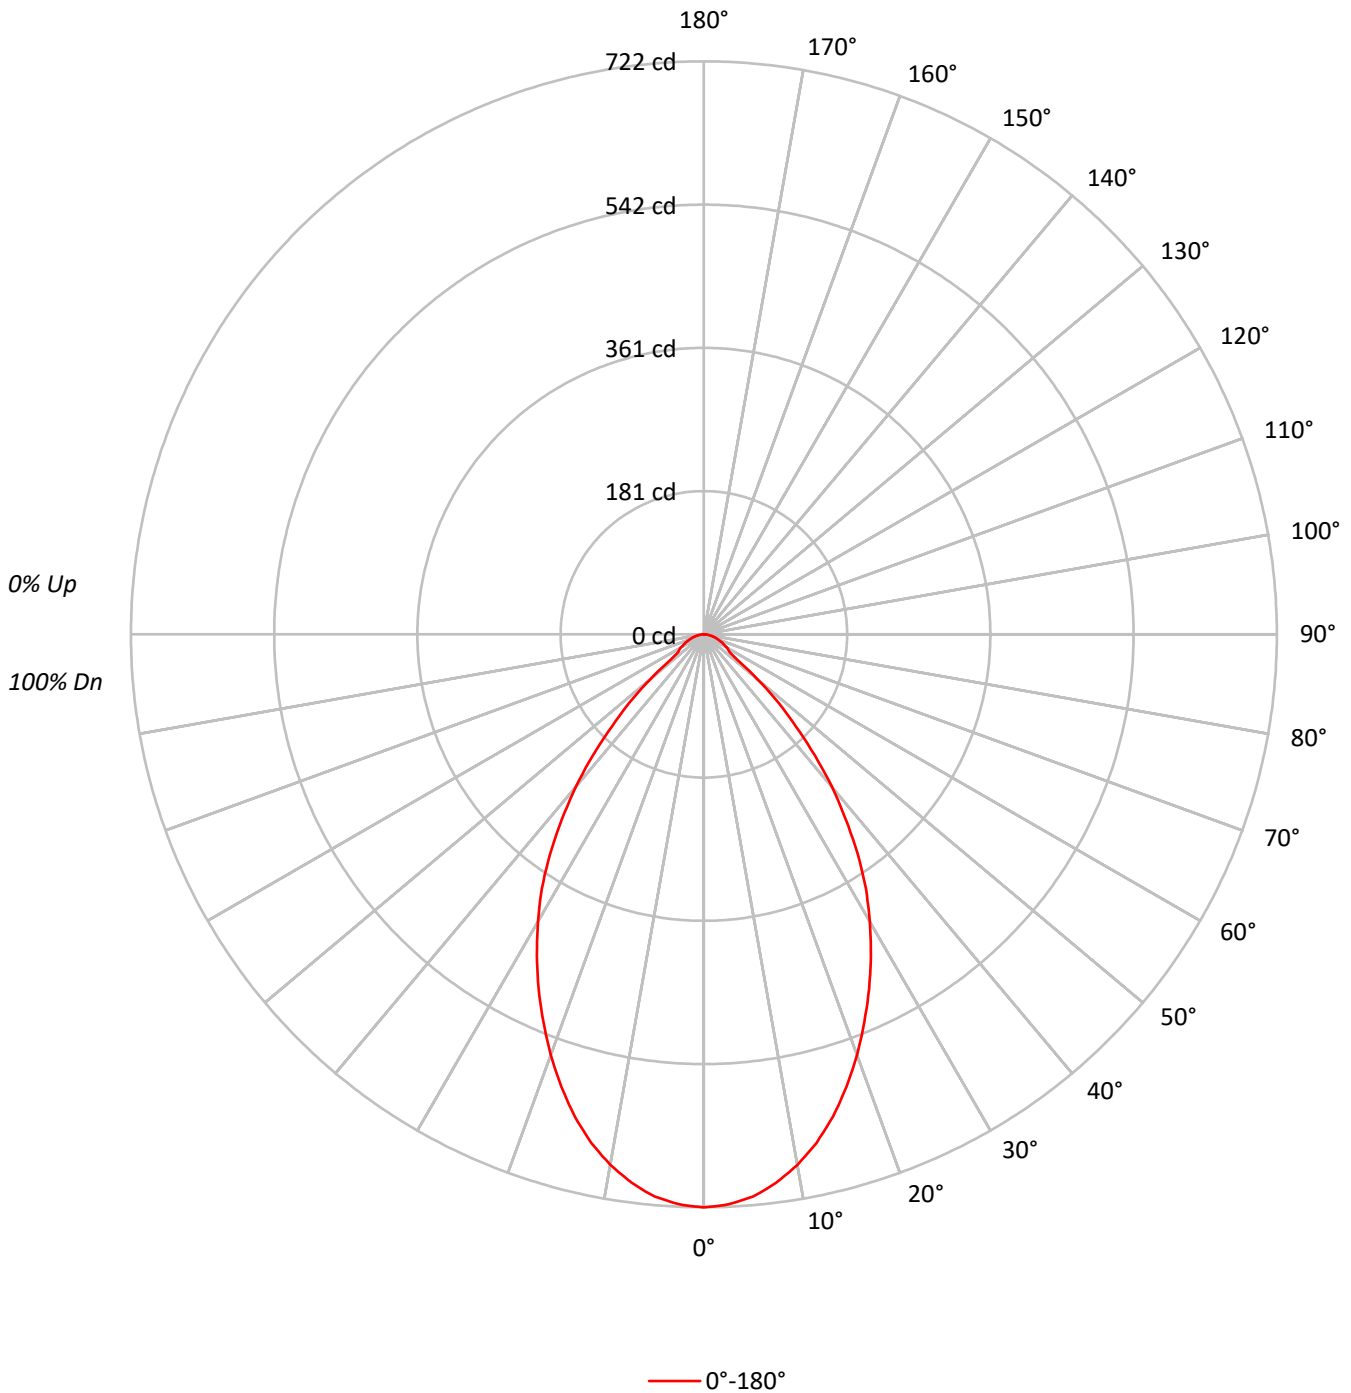



TEST NUMBER: P1302249
 CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DLD1MW_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	158343
5°	156570
10°	151144
15°	142793
20°	131611
25°	119184
30°	105814
35°	90426
40°	71906
45°	50703
50°	30293
55°	15330
60°	14736
65°	13490
70°	12502
75°	11946
80°	10986
85°	8051

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 50703 cd/sqm



TEST NUMBER: P1302249

CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DLD1MW_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.8	7.5
10°-20°	175.8	19.7
20°-30°	225.7	25.3
30°-40°	209.3	23.5
40°-50°	127.4	14.3
50°-60°	42.5	4.8
60°-70°	25.8	2.9
70°-80°	14.6	1.6
80°-90°	4.1	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	468.3	52.5
0°-40°	677.6	76.0
0°-60°	847.5	95.0
0°-90°	892.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	892.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	722	
5°	711	67
15°	629	176
25°	493	226
35°	338	209
45°	164	127
55°	40	42
65°	26	26
75°	14	15
85°	3	4
90°	0	



TEST NUMBER: P1302249
CATALOG NUMBER: P3AS17R60W2N902765DE010 E3DLD1MW_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	722.1
2.5°	718.9
5°	711.3
7.5°	697.2
10°	678.8
12.5°	656.1
15°	629.0
17.5°	597.6
20°	564.0
22.5°	528.3
25°	492.6
27.5°	455.8
30°	417.9
32.5°	380.0
35°	337.8
37.5°	293.4
40°	251.2
42.5°	206.8
45°	163.5
47.5°	126.7
50°	88.8
52.5°	53.0
55°	40.1
57.5°	36.8
60°	33.6
62.5°	29.2
65°	26.0
67.5°	22.7
70°	19.5
72.5°	16.2
75°	14.1
77.5°	10.8
80°	8.7
82.5°	5.4
85°	3.2
87.5°	2.2
90°	0.0

(END OF REPORT)