

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302390

Luminaire Tested: P3AS17R65W2N902750DE010 E3DLD1GPH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302390
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R65W2N902750DE010 E3DLD1GPH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 3500K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 468.0 lumens
Efficiency: N/A
Efficacy: 24.1 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302390
CATALOG NUMBER: P3AS17R65W2N902750DE010 E3DLD1GPH_3500K

Luminous Intensity Polar Plot

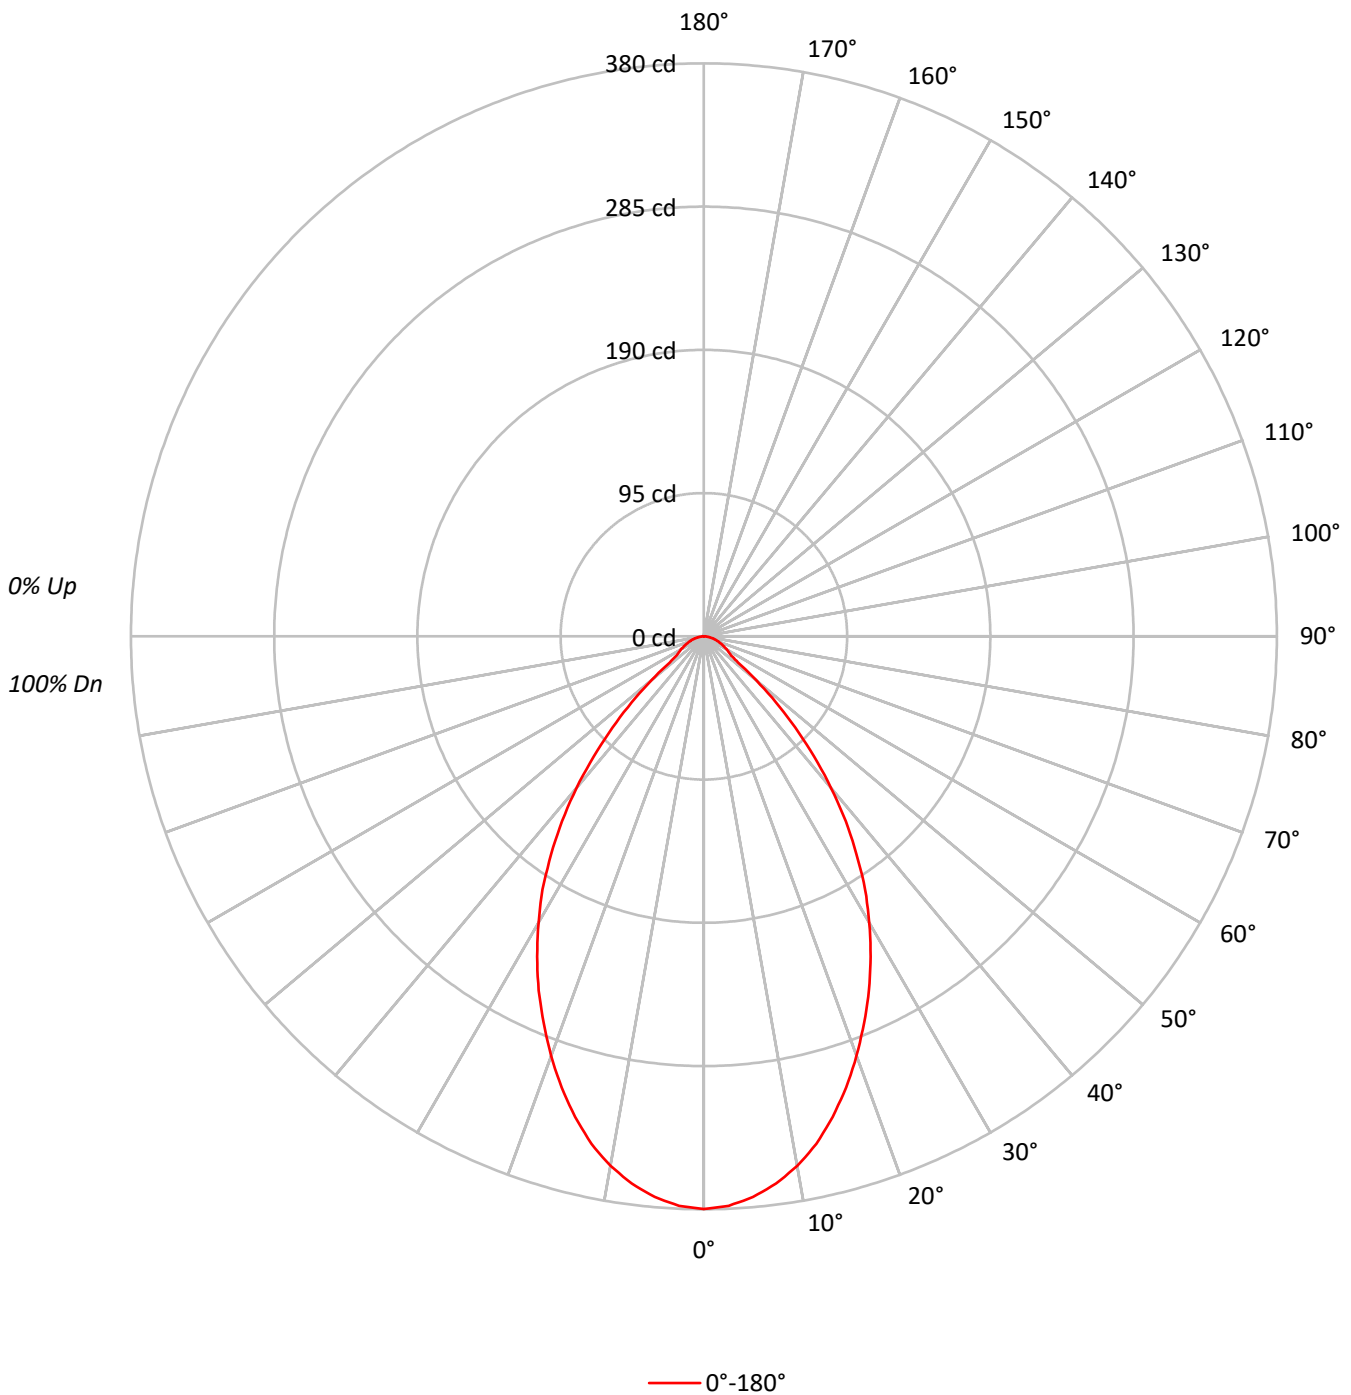



TEST NUMBER: P1302390
 CATALOG NUMBER: P3AS17R65W2N902750DE010 E3DLD1GPH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91	91	91	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	84	82	82	82	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74	74	74	74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67	67	67	67
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61	61	61	61
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56	56	56	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51	51	51	51
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47	47	47	47
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44	44	44	44
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41	41	41	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	83283
5°	82170
10°	79402
15°	74893
20°	69073
25°	62689
30°	55528
35°	47248
40°	37613
45°	26545
50°	15420
55°	8411
60°	7806
65°	7108
70°	6475
75°	6015
80°	5304
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 26545 cd/sqm



TEST NUMBER: P1302390

CATALOG NUMBER: P3AS17R65W2N902750DE010 E3DLD1GPH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.1	7.5
10°-20°	92.3	19.7
20°-30°	118.6	25.3
30°-40°	109.7	23.4
40°-50°	66.3	14.2
50°-60°	22.6	4.8
60°-70°	13.6	2.9
70°-80°	7.7	1.6
80°-90°	2.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	246.0	52.6
0°-40°	355.7	76.0
0°-60°	444.5	95.0
0°-90°	468.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	468.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	380	
5°	373	35
15°	330	92
25°	259	119
35°	176	110
45°	86	66
55°	22	23
65°	14	14
75°	7	8
85°	2	2
90°	0	



TEST NUMBER: P1302390
CATALOG NUMBER: P3AS17R65W2N902750DE010 E3DLD1GPH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	379.8
2.5°	378.0
5°	373.3
7.5°	366.1
10°	356.6
12.5°	344.7
15°	329.9
17.5°	313.8
20°	296.0
22.5°	277.6
25°	259.1
27.5°	239.5
30°	219.3
32.5°	199.1
35°	176.5
37.5°	154.5
40°	131.4
42.5°	108.2
45°	85.6
47.5°	64.8
50°	45.2
52.5°	28.5
55°	22.0
57.5°	19.6
60°	17.8
62.5°	15.5
65°	13.7
67.5°	11.9
70°	10.1
72.5°	8.9
75°	7.1
77.5°	5.9
80°	4.2
82.5°	3.0
85°	1.8
87.5°	1.2
90°	0.0

(END OF REPORT)