

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302515

Luminaire Tested: P3AS17R65W2N902765DE010 E3DL1GPH\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1302515  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-43)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R65W2N902765DE010 E3DL1GPH\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 3000K CCT AND, 90CRI ,  
E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 587.0 lumens  
Efficiency: N/A  
Efficacy: 30.3 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.88  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1302515  
CATALOG NUMBER: P3AS17R65W2N902765DE010 E3DL1GPH\_3000K

### Luminous Intensity Polar Plot

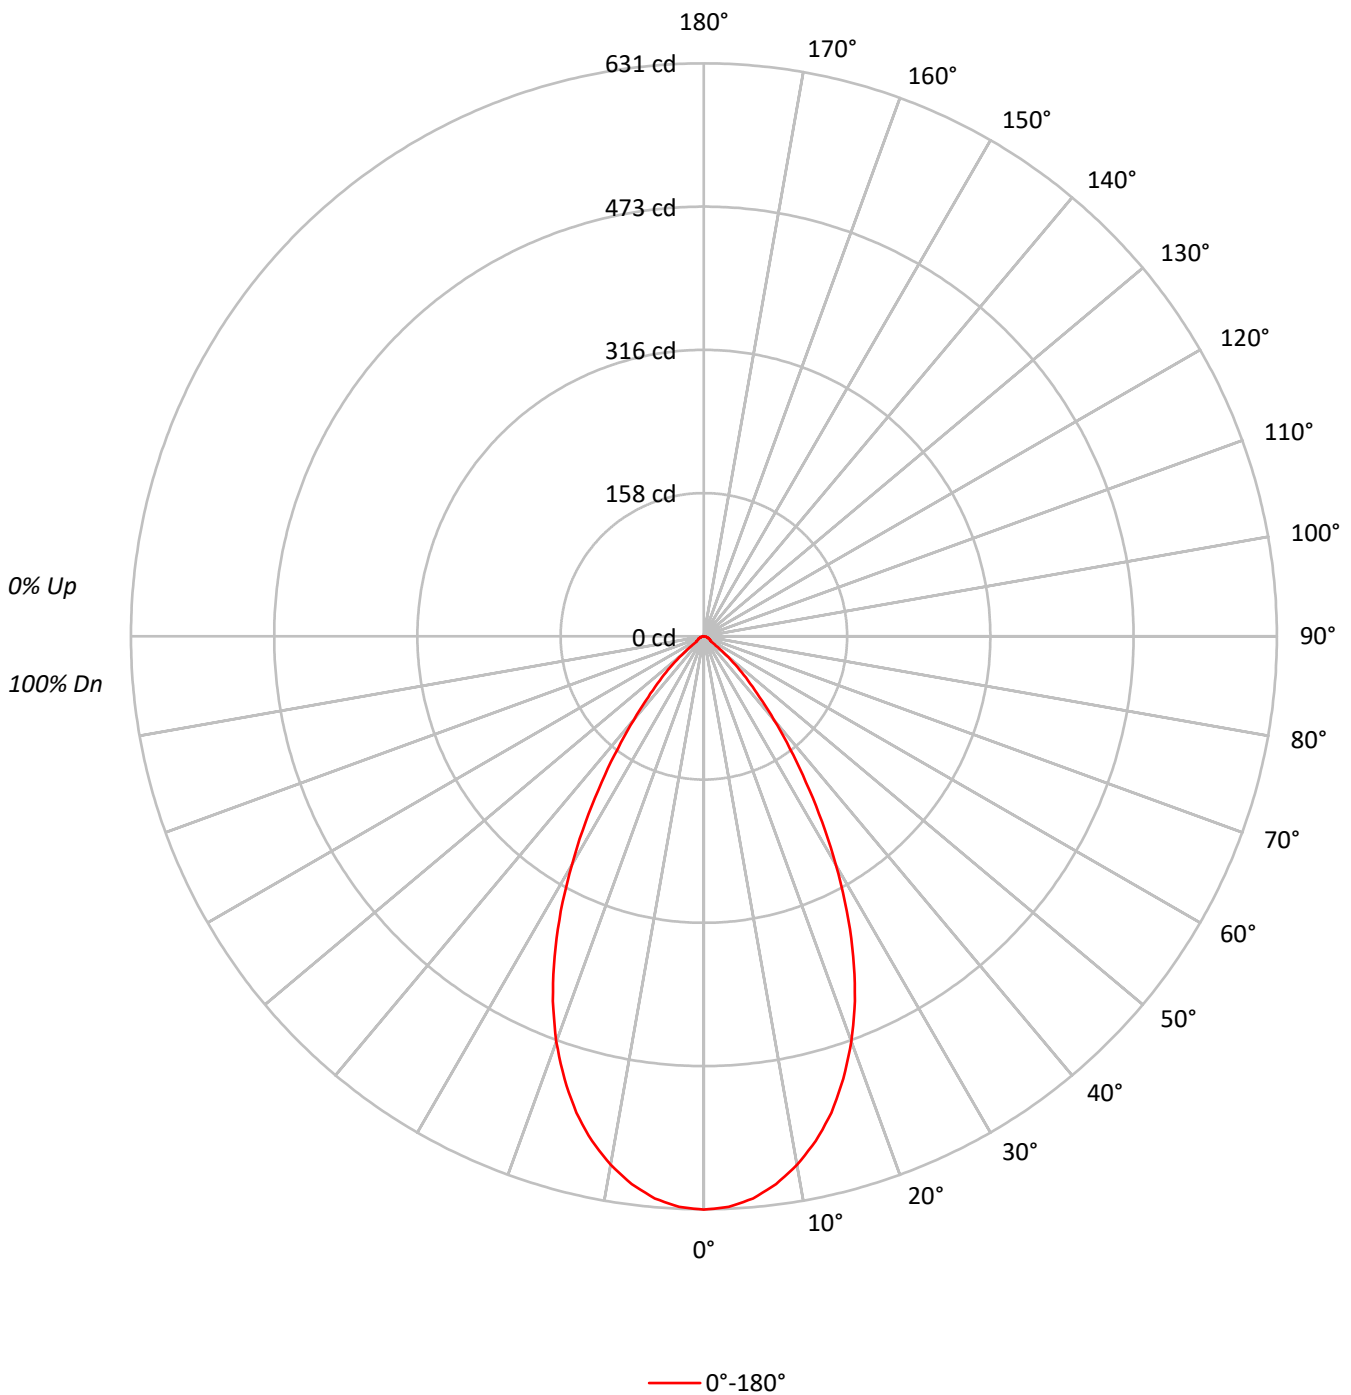



TEST NUMBER: P1302515

CATALOG NUMBER: P3AS17R65W2N902765DE010 E3DL1GPH\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    | 100 |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 96  | 94  | 93  |    |    | 93  |
| 2   | 107 | 102 | 98  | 94  | 105 | 100 | 96  | 93  | 97  | 94  | 91  | 94  | 91  | 89  | 91  | 89  | 87  | 85  |    |    | 85  |
| 3   | 101 | 95  | 89  | 85  | 99  | 93  | 88  | 84  | 90  | 86  | 83  | 88  | 85  | 82  | 86  | 83  | 80  | 79  |    |    | 79  |
| 4   | 96  | 88  | 82  | 78  | 94  | 87  | 81  | 77  | 85  | 80  | 76  | 83  | 79  | 75  | 81  | 77  | 74  | 73  |    |    | 73  |
| 5   | 91  | 82  | 76  | 71  | 89  | 81  | 75  | 71  | 79  | 74  | 70  | 77  | 73  | 70  | 76  | 72  | 69  | 68  |    |    | 68  |
| 6   | 86  | 77  | 70  | 66  | 84  | 76  | 70  | 66  | 74  | 69  | 65  | 73  | 68  | 65  | 72  | 67  | 64  | 63  |    |    | 63  |
| 7   | 82  | 72  | 66  | 61  | 80  | 71  | 65  | 61  | 70  | 64  | 61  | 69  | 64  | 60  | 67  | 63  | 60  | 58  |    |    | 58  |
| 8   | 77  | 67  | 61  | 57  | 76  | 67  | 61  | 57  | 66  | 60  | 57  | 65  | 60  | 56  | 64  | 59  | 56  | 55  |    |    | 55  |
| 9   | 74  | 64  | 57  | 53  | 72  | 63  | 57  | 53  | 62  | 57  | 53  | 61  | 56  | 53  | 60  | 56  | 53  | 51  |    |    | 51  |
| 10  | 70  | 60  | 54  | 50  | 69  | 59  | 54  | 50  | 59  | 53  | 50  | 58  | 53  | 50  | 57  | 53  | 49  | 48  |    |    | 48  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 138432 |
| 5°  | 136782 |
| 10° | 131572 |
| 15° | 123270 |
| 20° | 110866 |
| 25° | 94143  |
| 30° | 73632  |
| 35° | 52468  |
| 40° | 34321  |
| 45° | 21243  |
| 50° | 10780  |
| 55° | 3785   |
| 60° | 3333   |
| 65° | 3321   |
| 70° | 3013   |
| 75° | 2965   |
| 80° | 2904   |
| 85° | 3019   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21243 cd/sqm



TEST NUMBER: P1302515  
 CATALOG NUMBER: P3AS17R65W2N902765DE010 E3DL1GPH\_3000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 58.3   | 9.9       |
| 10°-20°   | 151.1  | 25.7      |
| 20°-30°   | 176.6  | 30.1      |
| 30°-40°   | 123.4  | 21.0      |
| 40°-50°   | 54.3   | 9.3       |
| 50°-60°   | 12.1   | 2.1       |
| 60°-70°   | 6.1    | 1.0       |
| 70°-80°   | 3.7    | 0.6       |
| 80°-90°   | 1.3    | 0.2       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 386.1  | 65.8      |
| 0°-40°    | 509.5  | 86.8      |
| 0°-60°    | 575.9  | 98.1      |
| 0°-90°    | 587.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 587.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 631 |      |
| 5°  | 621 | 58   |
| 15° | 543 | 151  |
| 25° | 389 | 177  |
| 35° | 196 | 123  |
| 45° | 68  | 54   |
| 55° | 10  | 12   |
| 65° | 6   | 6    |
| 75° | 4   | 4    |
| 85° | 1   | 1    |
| 90° | 0   |      |



TEST NUMBER: P1302515  
CATALOG NUMBER: P3AS17R65W2N902765DE010 E3DL1GPH\_3000K

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 631.3 |
| 2.5°  | 629.0 |
| 5°    | 621.4 |
| 7.5°  | 608.5 |
| 10°   | 590.9 |
| 12.5° | 569.3 |
| 15°   | 543.0 |
| 17.5° | 510.8 |
| 20°   | 475.1 |
| 22.5° | 434.7 |
| 25°   | 389.1 |
| 27.5° | 341.1 |
| 30°   | 290.8 |
| 32.5° | 242.2 |
| 35°   | 196.0 |
| 37.5° | 155.6 |
| 40°   | 119.9 |
| 42.5° | 90.7  |
| 45°   | 68.5  |
| 47.5° | 50.3  |
| 50°   | 31.6  |
| 52.5° | 16.4  |
| 55°   | 9.9   |
| 57.5° | 8.8   |
| 60°   | 7.6   |
| 62.5° | 7.0   |
| 65°   | 6.4   |
| 67.5° | 5.3   |
| 70°   | 4.7   |
| 72.5° | 4.1   |
| 75°   | 3.5   |
| 77.5° | 2.9   |
| 80°   | 2.3   |
| 82.5° | 1.8   |
| 85°   | 1.2   |
| 87.5° | 0.6   |
| 90°   | 0.0   |

(END OF REPORT)