

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302550

Luminaire Tested: P3AS17R65W2N902765DE010 E3DLD1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302550
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R65W2N902765DE010 E3DLD1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 2700K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 418.0 lumens
Efficiency: N/A
Efficacy: 21.5 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302550
CATALOG NUMBER: P3AS17R65W2N902765DE010 E3DLD1GPH_2700K

Luminous Intensity Polar Plot

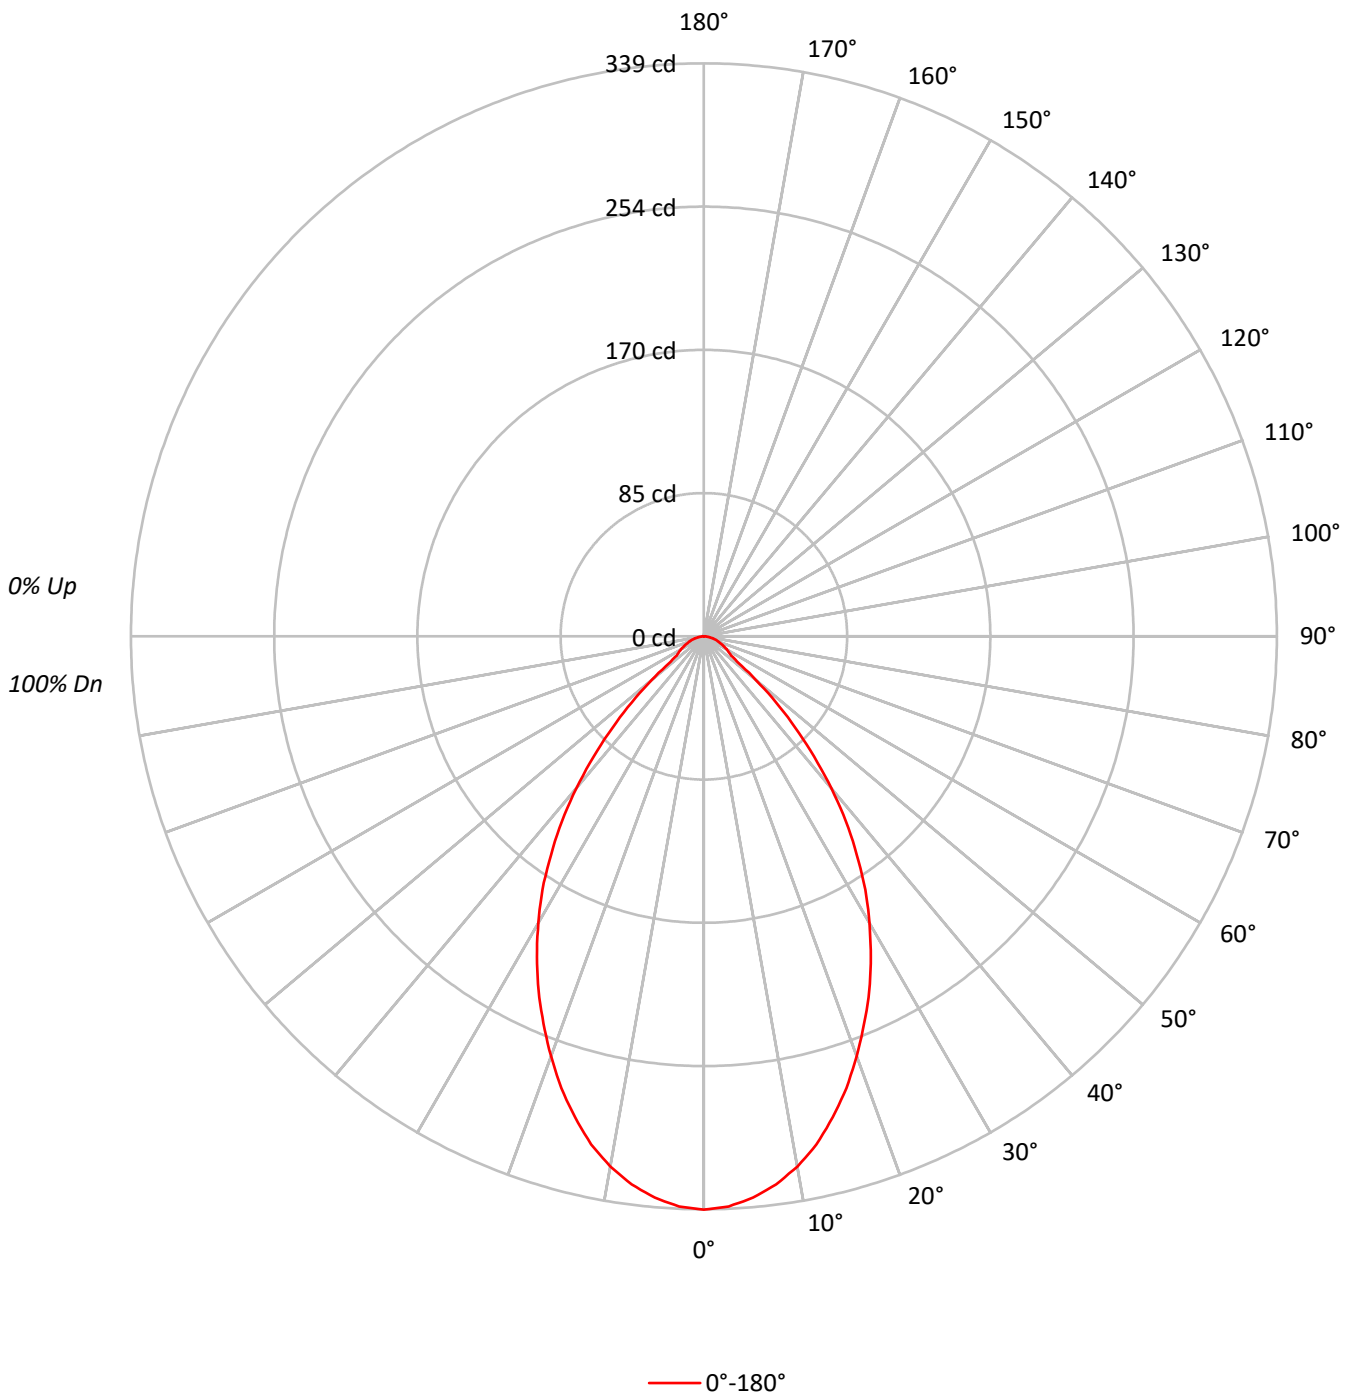



TEST NUMBER: P1302550
 CATALOG NUMBER: P3AS17R65W2N902765DE010 E3DLD1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91			91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	84	82			82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74			74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67			67
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61			61
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56			56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			51
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47			47
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44			44
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41			41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	74380
5°	73387
10°	70918
15°	66879
20°	61699
25°	56011
30°	49603
35°	42215
40°	33577
45°	23692
50°	13748
55°	7493
60°	6973
65°	6330
70°	5770
75°	5422
80°	4672
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23692 cd/sqm



TEST NUMBER: P1302550
 CATALOG NUMBER: P3AS17R65W2N902765DE010 E3DLD1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	31.4	7.5
10°-20°	82.4	19.7
20°-30°	105.9	25.3
30°-40°	98.0	23.4
40°-50°	59.1	14.2
50°-60°	20.2	4.8
60°-70°	12.1	2.9
70°-80°	6.9	1.6
80°-90°	2.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	219.7	52.6
0°-40°	317.7	76.0
0°-60°	397.0	95.0
0°-90°	418.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	418.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	339	
5°	333	31
15°	295	82
25°	232	106
35°	158	98
45°	76	59
55°	20	20
65°	12	12
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P1302550
CATALOG NUMBER: P3AS17R65W2N902765DE010 E3DLD1GPH_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	339.2
2.5°	337.6
5°	333.4
7.5°	327.0
10°	318.5
12.5°	307.9
15°	294.6
17.5°	280.3
20°	264.4
22.5°	247.9
25°	231.5
27.5°	213.9
30°	195.9
32.5°	177.8
35°	157.7
37.5°	138.0
40°	117.3
42.5°	96.6
45°	76.4
47.5°	57.9
50°	40.3
52.5°	25.5
55°	19.6
57.5°	17.5
60°	15.9
62.5°	13.8
65°	12.2
67.5°	10.6
70°	9.0
72.5°	8.0
75°	6.4
77.5°	5.3
80°	3.7
82.5°	2.7
85°	1.6
87.5°	1.1
90°	0.0

(END OF REPORT)