

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302627

Luminaire Tested: P3AS17R70W2N902750DE010 E3CB1MMS_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302627
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R70W2N902750DE010 E3CB1MMS_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 2700K CCT AND, 90CRI ,
E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1354.0 lumens
Efficiency: N/A
Efficacy: 69.8 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302627
CATALOG NUMBER: P3AS17R70W2N902750DE010 E3CB1MMS_2700K

Luminous Intensity Polar Plot

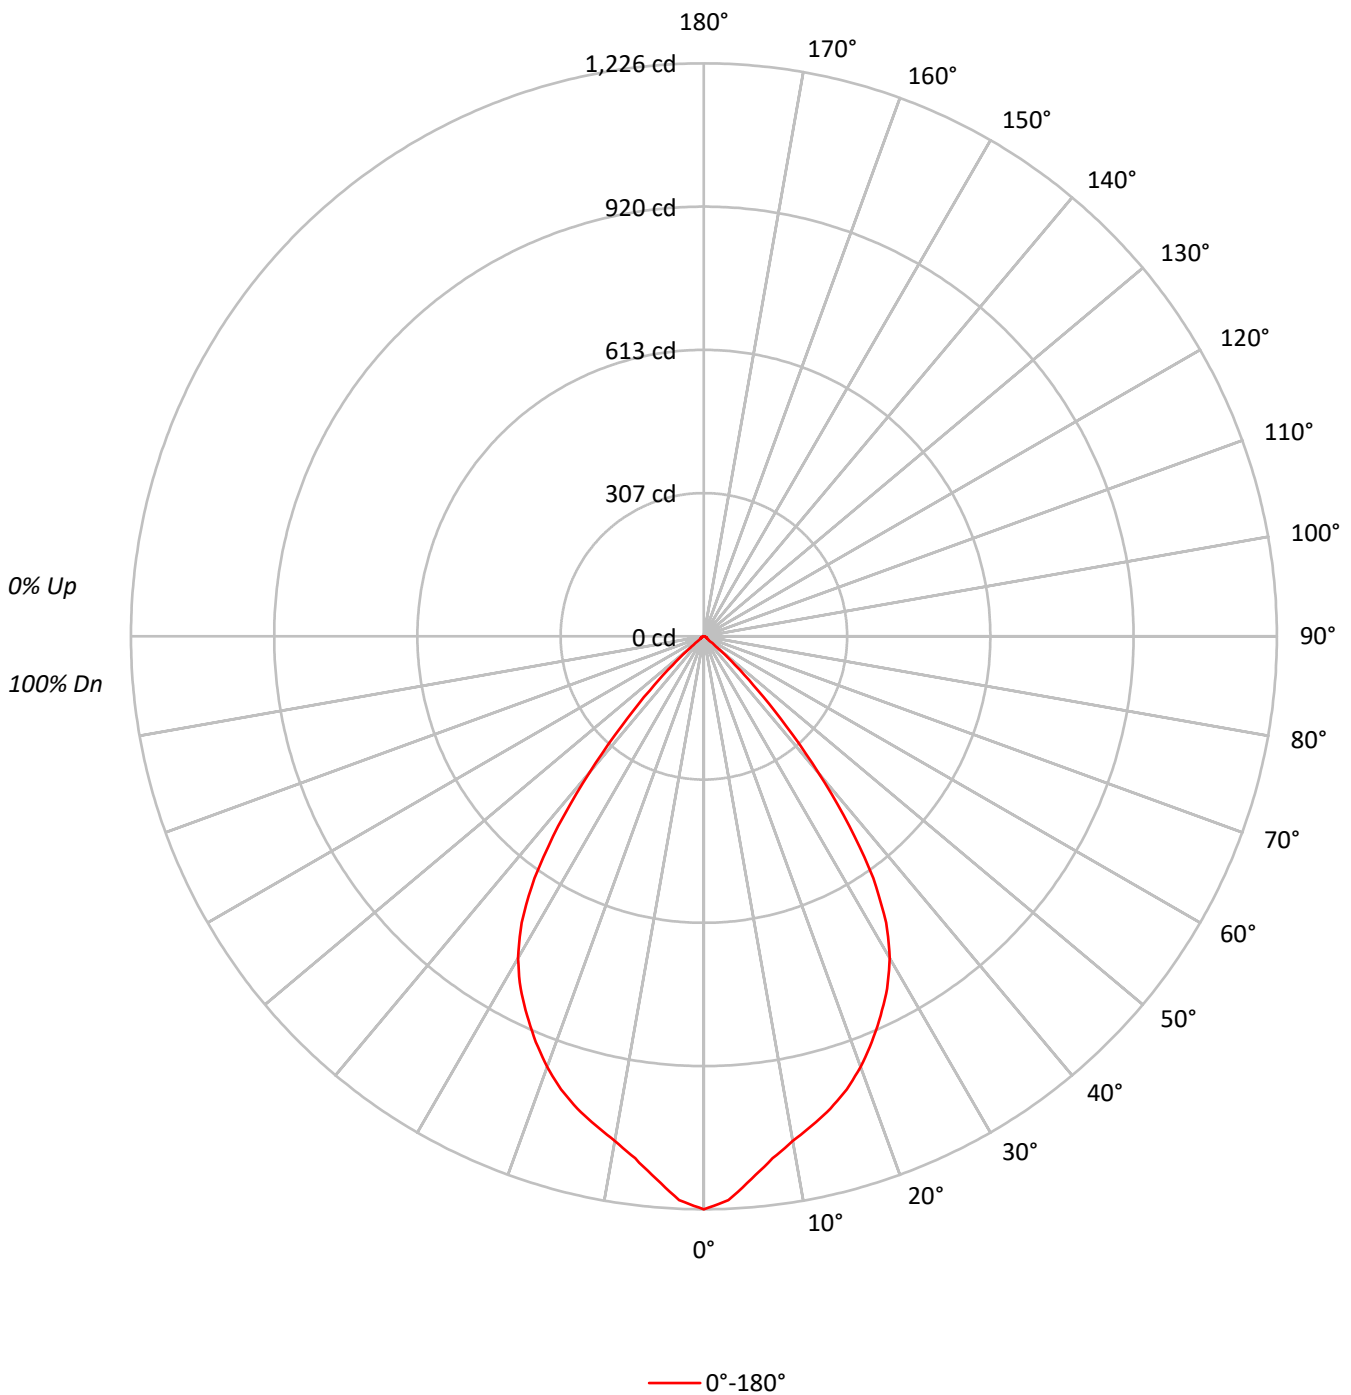



TEST NUMBER: P1302627

CATALOG NUMBER: P3AS17R70W2N902750DE010 E3CB1MMS_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | |
| 1 | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 | 100 | 99 | 97 | 97 | 96 | 94 | 93 | | | |
| 2 | 107 | 102 | 97 | 94 | 105 | 100 | 96 | 93 | 97 | 94 | 91 | 94 | 91 | 89 | 91 | 89 | 87 | 85 | | | |
| 3 | 101 | 94 | 89 | 85 | 99 | 93 | 88 | 84 | 90 | 86 | 83 | 88 | 84 | 81 | 85 | 82 | 80 | 78 | | | |
| 4 | 95 | 87 | 81 | 77 | 94 | 86 | 81 | 76 | 84 | 79 | 75 | 82 | 78 | 75 | 80 | 77 | 74 | 72 | | | |
| 5 | 90 | 81 | 75 | 70 | 88 | 80 | 74 | 70 | 78 | 73 | 69 | 77 | 72 | 69 | 75 | 71 | 68 | 66 | | | |
| 6 | 85 | 75 | 69 | 64 | 83 | 75 | 69 | 64 | 73 | 68 | 64 | 72 | 67 | 63 | 70 | 66 | 63 | 61 | | | |
| 7 | 80 | 70 | 64 | 59 | 79 | 70 | 64 | 59 | 68 | 63 | 59 | 67 | 62 | 59 | 66 | 62 | 58 | 57 | | | |
| 8 | 76 | 66 | 59 | 55 | 75 | 65 | 59 | 55 | 64 | 58 | 55 | 63 | 58 | 54 | 62 | 57 | 54 | 53 | | | |
| 9 | 72 | 62 | 55 | 51 | 71 | 61 | 55 | 51 | 60 | 55 | 51 | 59 | 54 | 50 | 58 | 54 | 50 | 49 | | | |
| 10 | 68 | 58 | 52 | 47 | 67 | 57 | 51 | 47 | 56 | 51 | 47 | 56 | 51 | 47 | 55 | 50 | 47 | 46 | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 268860 |
| 5° | 256548 |
| 10° | 244106 |
| 15° | 237572 |
| 20° | 228803 |
| 25° | 216545 |
| 30° | 201398 |
| 35° | 169182 |
| 40° | 109033 |
| 45° | 50672 |
| 50° | 13304 |
| 55° | 3326 |
| 60° | 3333 |
| 65° | 2802 |
| 70° | 2757 |
| 75° | 2711 |
| 80° | 2778 |
| 85° | 2768 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 50672 cd/sqm



TEST NUMBER: P1302627

CATALOG NUMBER: P3AS17R70W2N902750DE010 E3CB1MMS_2700K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 109.1 | 8.1 |
| 10°-20° | 294.1 | 21.7 |
| 20°-30° | 410.8 | 30.3 |
| 30°-40° | 380.9 | 28.1 |
| 40°-50° | 136.6 | 10.1 |
| 50°-60° | 11.6 | 0.9 |
| 60°-70° | 5.8 | 0.4 |
| 70°-80° | 3.7 | 0.3 |
| 80°-90° | 1.5 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 814.0 | 60.1 |
| 0°-40° | 1194.9 | 88.3 |
| 0°-60° | 1343.1 | 99.2 |
| 0°-90° | 1354.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1354.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 1226 | |
| 5° | 1166 | 109 |
| 15° | 1046 | 294 |
| 25° | 895 | 411 |
| 35° | 632 | 381 |
| 45° | 163 | 137 |
| 55° | 9 | 12 |
| 65° | 5 | 6 |
| 75° | 3 | 4 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P1302627
CATALOG NUMBER: P3AS17R70W2N902750DE010 E3CB1MMS_2700K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 1226.1 |
| 2.5° | 1207.7 |
| 5° | 1165.5 |
| 7.5° | 1126.6 |
| 10° | 1096.3 |
| 12.5° | 1071.4 |
| 15° | 1046.5 |
| 17.5° | 1016.2 |
| 20° | 980.5 |
| 22.5° | 939.4 |
| 25° | 895.0 |
| 27.5° | 849.5 |
| 30° | 795.4 |
| 32.5° | 726.2 |
| 35° | 632.0 |
| 37.5° | 511.9 |
| 40° | 380.9 |
| 42.5° | 259.7 |
| 45° | 163.4 |
| 47.5° | 90.9 |
| 50° | 39.0 |
| 52.5° | 13.0 |
| 55° | 8.7 |
| 57.5° | 7.6 |
| 60° | 7.6 |
| 62.5° | 6.5 |
| 65° | 5.4 |
| 67.5° | 5.4 |
| 70° | 4.3 |
| 72.5° | 4.3 |
| 75° | 3.2 |
| 77.5° | 3.2 |
| 80° | 2.2 |
| 82.5° | 2.2 |
| 85° | 1.1 |
| 87.5° | 1.1 |
| 90° | 0.0 |

(END OF REPORT)