

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302730

Luminaire Tested: P3AS17R70W2N902750DE010 E3DLP1WH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302730
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R70W2N902750DE010 E3DLP1WH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 4000K CCT AND, 90CRI ,
E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1220.0 lumens
Efficiency: N/A
Efficacy: 62.9 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302730
CATALOG NUMBER: P3AS17R70W2N902750DE010 E3DLP1WH_4000K

Luminous Intensity Polar Plot

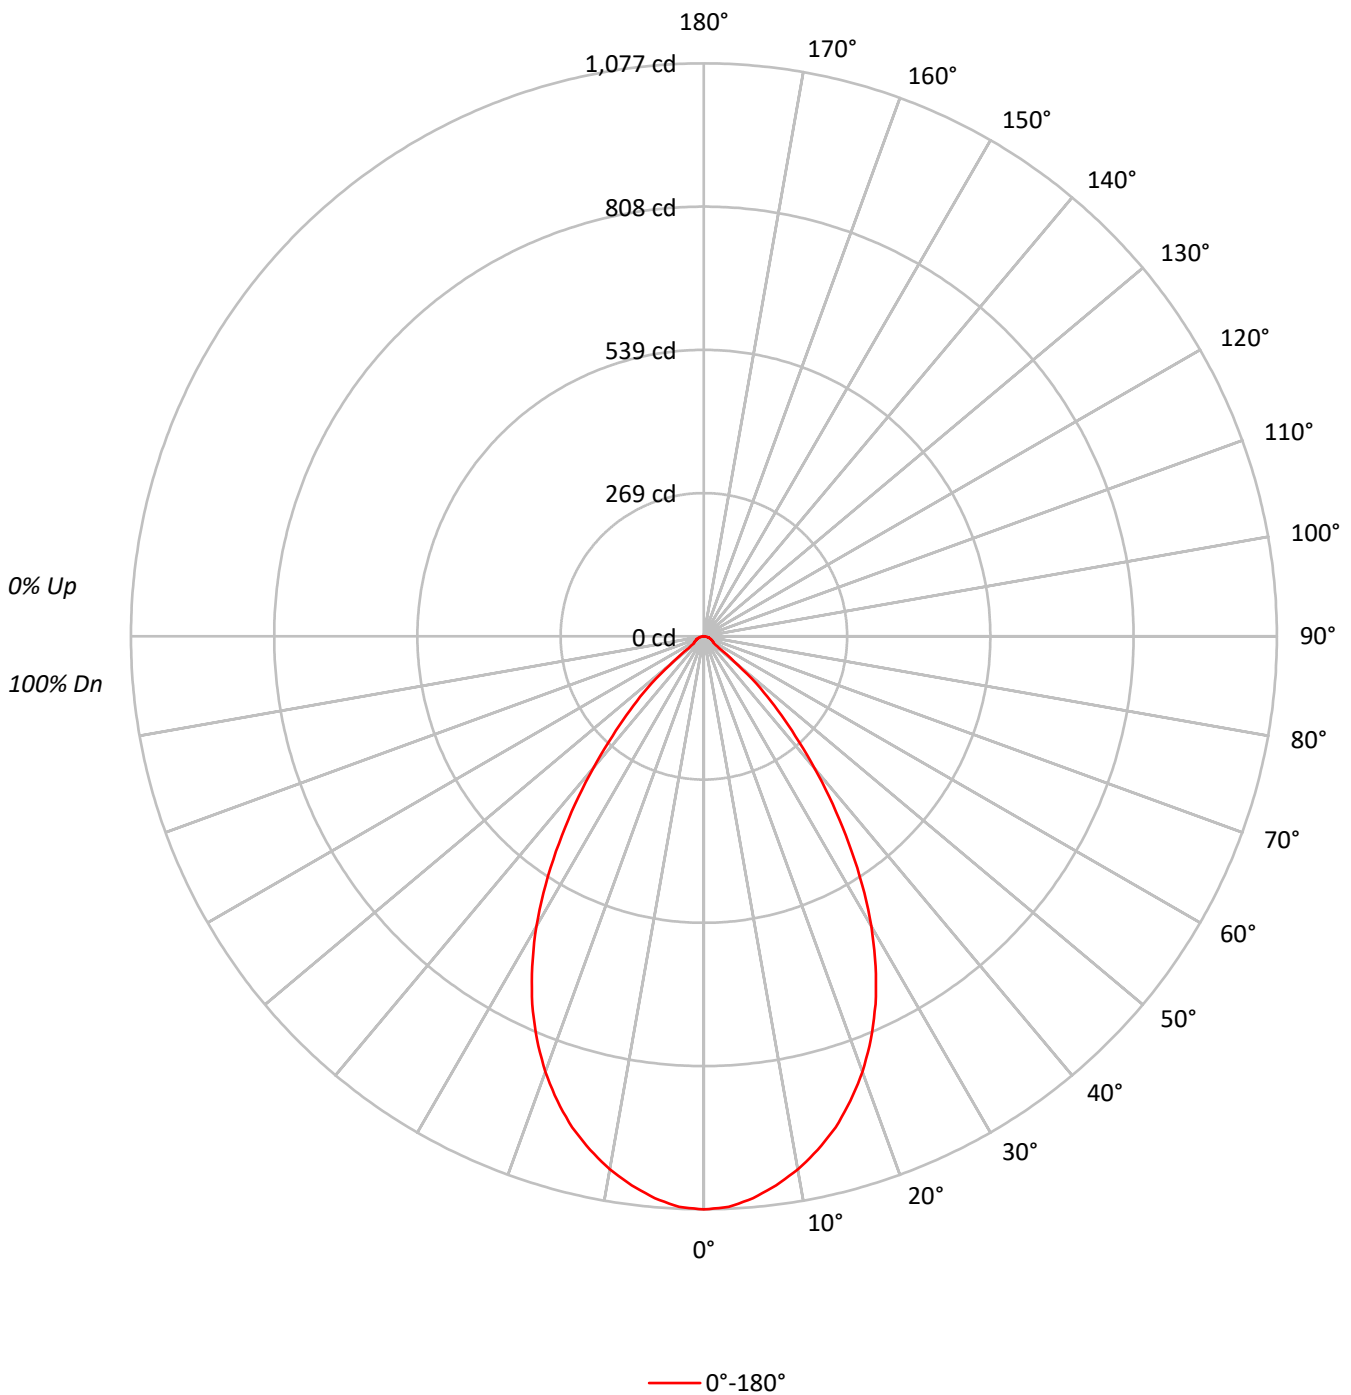



TEST NUMBER: P1302730
 CATALOG NUMBER: P3AS17R70W2N902750DE010 E3DLP1WH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 113 | 110 | 107 | 104 | 110 | 107 | 105 | 103 | 103 | 101 | 100 | 100 | 98 | 97 | 96 | 95 | 94 | 92 | 92 | 92 | 92 |
| 2 | 106 | 101 | 96 | 93 | 104 | 99 | 95 | 92 | 96 | 92 | 90 | 93 | 90 | 88 | 90 | 88 | 86 | 84 | 84 | 84 | 84 |
| 3 | 100 | 93 | 88 | 83 | 98 | 92 | 87 | 82 | 89 | 85 | 81 | 86 | 83 | 80 | 84 | 81 | 79 | 77 | 77 | 77 | 77 |
| 4 | 94 | 86 | 80 | 75 | 93 | 85 | 79 | 75 | 83 | 78 | 74 | 81 | 76 | 73 | 79 | 75 | 72 | 70 | 70 | 70 | 70 |
| 5 | 89 | 80 | 73 | 69 | 87 | 79 | 73 | 68 | 77 | 72 | 68 | 75 | 71 | 67 | 74 | 70 | 66 | 65 | 65 | 65 | 65 |
| 6 | 84 | 74 | 68 | 63 | 82 | 73 | 67 | 63 | 72 | 66 | 62 | 70 | 65 | 62 | 69 | 65 | 61 | 60 | 60 | 60 | 60 |
| 7 | 79 | 69 | 62 | 58 | 78 | 68 | 62 | 58 | 67 | 61 | 57 | 66 | 61 | 57 | 65 | 60 | 57 | 55 | 55 | 55 | 55 |
| 8 | 75 | 65 | 58 | 53 | 74 | 64 | 58 | 53 | 63 | 57 | 53 | 62 | 57 | 53 | 61 | 56 | 53 | 51 | 51 | 51 | 51 |
| 9 | 71 | 60 | 54 | 50 | 70 | 60 | 54 | 50 | 59 | 53 | 49 | 58 | 53 | 49 | 57 | 52 | 49 | 48 | 48 | 48 | 48 |
| 10 | 67 | 57 | 50 | 46 | 66 | 56 | 50 | 46 | 55 | 50 | 46 | 55 | 49 | 46 | 54 | 49 | 46 | 44 | 44 | 44 | 44 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 236187 |
| 5° | 233347 |
| 10° | 226605 |
| 15° | 217005 |
| 20° | 203274 |
| 25° | 184680 |
| 30° | 159518 |
| 35° | 127127 |
| 40° | 92602 |
| 45° | 60875 |
| 50° | 28519 |
| 55° | 8793 |
| 60° | 8508 |
| 65° | 8198 |
| 70° | 7758 |
| 75° | 8218 |
| 80° | 7703 |
| 85° | 6038 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 60875 cd/sqm



TEST NUMBER: P1302730

CATALOG NUMBER: P3AS17R70W2N902750DE010 E3DLP1WH_4000K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 99.8 | 8.2 |
| 10°-20° | 267.5 | 21.9 |
| 20°-30° | 347.7 | 28.5 |
| 30°-40° | 295.0 | 24.2 |
| 40°-50° | 152.1 | 12.5 |
| 50°-60° | 29.3 | 2.4 |
| 60°-70° | 15.9 | 1.3 |
| 70°-80° | 9.8 | 0.8 |
| 80°-90° | 2.8 | 0.2 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 715.1 | 58.6 |
| 0°-40° | 1010.1 | 82.8 |
| 0°-60° | 1191.6 | 97.7 |
| 0°-90° | 1220.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1220.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 1077 | |
| 5° | 1060 | 100 |
| 15° | 956 | 268 |
| 25° | 763 | 348 |
| 35° | 475 | 295 |
| 45° | 196 | 152 |
| 55° | 23 | 29 |
| 65° | 16 | 16 |
| 75° | 10 | 10 |
| 85° | 2 | 3 |
| 90° | 0 | |



TEST NUMBER: P1302730
CATALOG NUMBER: P3AS17R70W2N902750DE010 E3DLP1WH_4000K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 1077.1 |
| 2.5° | 1073.4 |
| 5° | 1060.1 |
| 7.5° | 1040.7 |
| 10° | 1017.7 |
| 12.5° | 988.6 |
| 15° | 955.9 |
| 17.5° | 915.9 |
| 20° | 871.1 |
| 22.5° | 820.2 |
| 25° | 763.3 |
| 27.5° | 699.1 |
| 30° | 630.0 |
| 32.5° | 553.7 |
| 35° | 474.9 |
| 37.5° | 397.4 |
| 40° | 323.5 |
| 42.5° | 254.4 |
| 45° | 196.3 |
| 47.5° | 144.2 |
| 50° | 83.6 |
| 52.5° | 36.3 |
| 55° | 23.0 |
| 57.5° | 21.8 |
| 60° | 19.4 |
| 62.5° | 18.2 |
| 65° | 15.8 |
| 67.5° | 14.5 |
| 70° | 12.1 |
| 72.5° | 10.9 |
| 75° | 9.7 |
| 77.5° | 7.3 |
| 80° | 6.1 |
| 82.5° | 3.6 |
| 85° | 2.4 |
| 87.5° | 1.2 |
| 90° | 0.0 |

(END OF REPORT)