

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302763

Luminaire Tested: P3AS17R70W2N902765DE010 E3CB1MW_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302763
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R70W2N902765DE010 E3CB1MW_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 5000K CCT AND, 90CRI ,
E3CB1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1507.0 lumens
Efficiency: N/A
Efficacy: 77.7 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302763
CATALOG NUMBER: P3AS17R70W2N902765DE010 E3CB1MW_5000K

Luminous Intensity Polar Plot

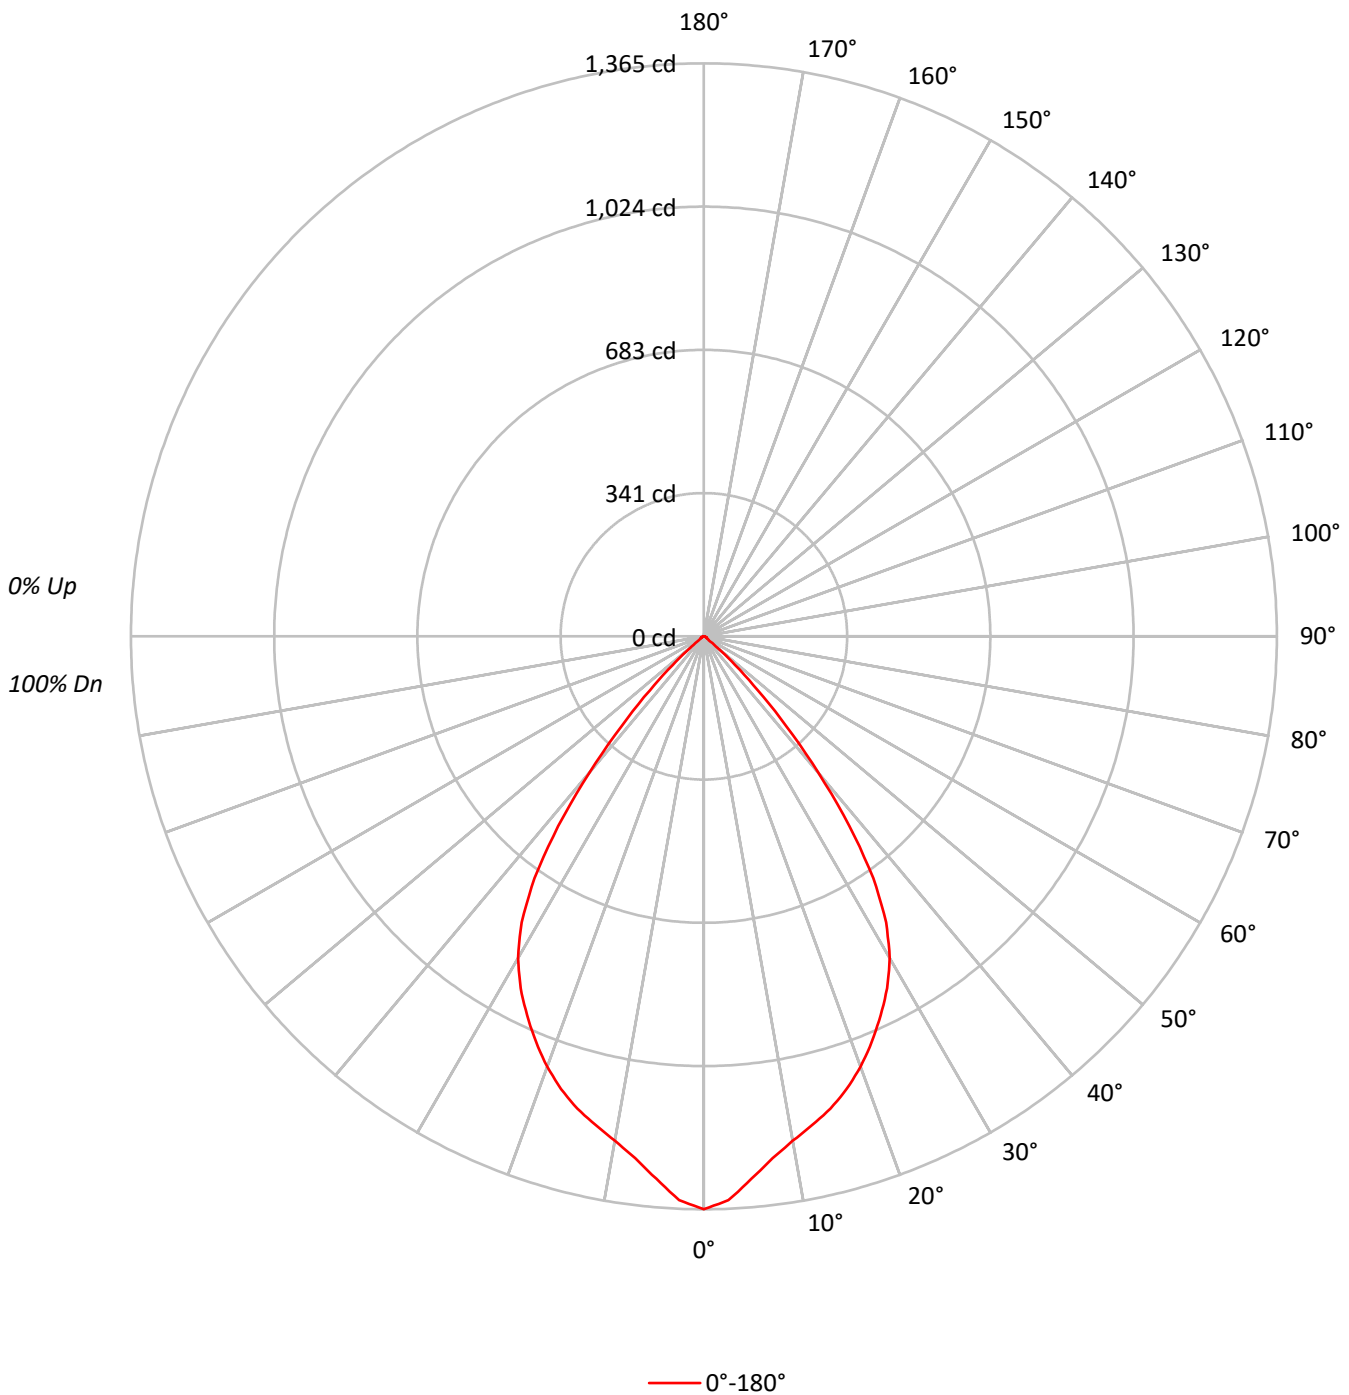



TEST NUMBER: P1302763

CATALOG NUMBER: P3AS17R70W2N902765DE010 E3CB1MW_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | 100 |
| 1 | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 | 100 | 99 | 97 | 97 | 96 | 94 | 93 | | | 93 |
| 2 | 107 | 102 | 97 | 94 | 105 | 100 | 96 | 93 | 97 | 94 | 91 | 94 | 91 | 89 | 91 | 89 | 87 | 85 | | | 85 |
| 3 | 101 | 94 | 89 | 85 | 99 | 93 | 88 | 84 | 90 | 86 | 83 | 88 | 84 | 81 | 85 | 82 | 80 | 78 | | | 78 |
| 4 | 95 | 87 | 81 | 77 | 94 | 86 | 81 | 76 | 84 | 79 | 75 | 82 | 78 | 75 | 80 | 77 | 74 | 72 | | | 72 |
| 5 | 90 | 81 | 75 | 70 | 88 | 80 | 74 | 70 | 78 | 73 | 69 | 77 | 72 | 69 | 75 | 71 | 68 | 66 | | | 66 |
| 6 | 85 | 75 | 69 | 64 | 83 | 75 | 69 | 64 | 73 | 68 | 64 | 72 | 67 | 63 | 70 | 66 | 63 | 61 | | | 61 |
| 7 | 80 | 70 | 64 | 59 | 79 | 70 | 64 | 59 | 68 | 63 | 59 | 67 | 62 | 59 | 66 | 62 | 58 | 57 | | | 57 |
| 8 | 76 | 66 | 59 | 55 | 75 | 65 | 59 | 55 | 64 | 58 | 55 | 63 | 58 | 54 | 62 | 57 | 54 | 53 | | | 53 |
| 9 | 72 | 62 | 55 | 51 | 71 | 61 | 55 | 51 | 60 | 55 | 51 | 59 | 54 | 50 | 58 | 54 | 50 | 49 | | | 49 |
| 10 | 68 | 58 | 52 | 47 | 67 | 57 | 51 | 47 | 56 | 51 | 47 | 56 | 51 | 47 | 55 | 50 | 47 | 46 | | | 46 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 299252 |
| 5° | 285537 |
| 10° | 271672 |
| 15° | 264406 |
| 20° | 254659 |
| 25° | 241006 |
| 30° | 224161 |
| 35° | 188295 |
| 40° | 121370 |
| 45° | 56409 |
| 50° | 14805 |
| 55° | 3670 |
| 60° | 3684 |
| 65° | 3113 |
| 70° | 3077 |
| 75° | 3050 |
| 80° | 3031 |
| 85° | 3019 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 56409 cd/sqm



TEST NUMBER: P1302763

CATALOG NUMBER: P3AS17R70W2N902765DE010 E3CB1MW_5000K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 121.4 | 8.1 |
| 10°-20° | 327.3 | 21.7 |
| 20°-30° | 457.3 | 30.3 |
| 30°-40° | 424.0 | 28.1 |
| 40°-50° | 152.0 | 10.1 |
| 50°-60° | 12.9 | 0.9 |
| 60°-70° | 6.4 | 0.4 |
| 70°-80° | 4.1 | 0.3 |
| 80°-90° | 1.6 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 906.0 | 60.1 |
| 0°-40° | 1329.9 | 88.3 |
| 0°-60° | 1494.8 | 99.2 |
| 0°-90° | 1507.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1507.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 1365 | |
| 5° | 1297 | 121 |
| 15° | 1165 | 327 |
| 25° | 996 | 457 |
| 35° | 703 | 424 |
| 45° | 182 | 152 |
| 55° | 10 | 13 |
| 65° | 6 | 6 |
| 75° | 4 | 4 |
| 85° | 1 | 2 |
| 90° | 0 | |



TEST NUMBER: P1302763
CATALOG NUMBER: P3AS17R70W2N902765DE010 E3CB1MW_5000K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 1364.7 |
| 2.5° | 1344.2 |
| 5° | 1297.2 |
| 7.5° | 1253.9 |
| 10° | 1220.1 |
| 12.5° | 1192.4 |
| 15° | 1164.7 |
| 17.5° | 1131.0 |
| 20° | 1091.3 |
| 22.5° | 1045.5 |
| 25° | 996.1 |
| 27.5° | 945.5 |
| 30° | 885.3 |
| 32.5° | 808.2 |
| 35° | 703.4 |
| 37.5° | 569.7 |
| 40° | 424.0 |
| 42.5° | 289.1 |
| 45° | 181.9 |
| 47.5° | 101.2 |
| 50° | 43.4 |
| 52.5° | 14.5 |
| 55° | 9.6 |
| 57.5° | 8.4 |
| 60° | 8.4 |
| 62.5° | 7.2 |
| 65° | 6.0 |
| 67.5° | 6.0 |
| 70° | 4.8 |
| 72.5° | 4.8 |
| 75° | 3.6 |
| 77.5° | 3.6 |
| 80° | 2.4 |
| 82.5° | 2.4 |
| 85° | 1.2 |
| 87.5° | 1.2 |
| 90° | 0.0 |

(END OF REPORT)