

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302766

Luminaire Tested: P3AS17R70W2N902765DE010 E3CD1MB_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1302766
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R70W2N902765DE010 E3CD1MB_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 3000K CCT AND, 90CRI ,
E3CD1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1494.1 lumens
Efficiency: N/A
Efficacy: 77.0 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1302766
CATALOG NUMBER: P3AS17R70W2N902765DE010 E3CD1MB_3000K

Luminous Intensity Polar Plot

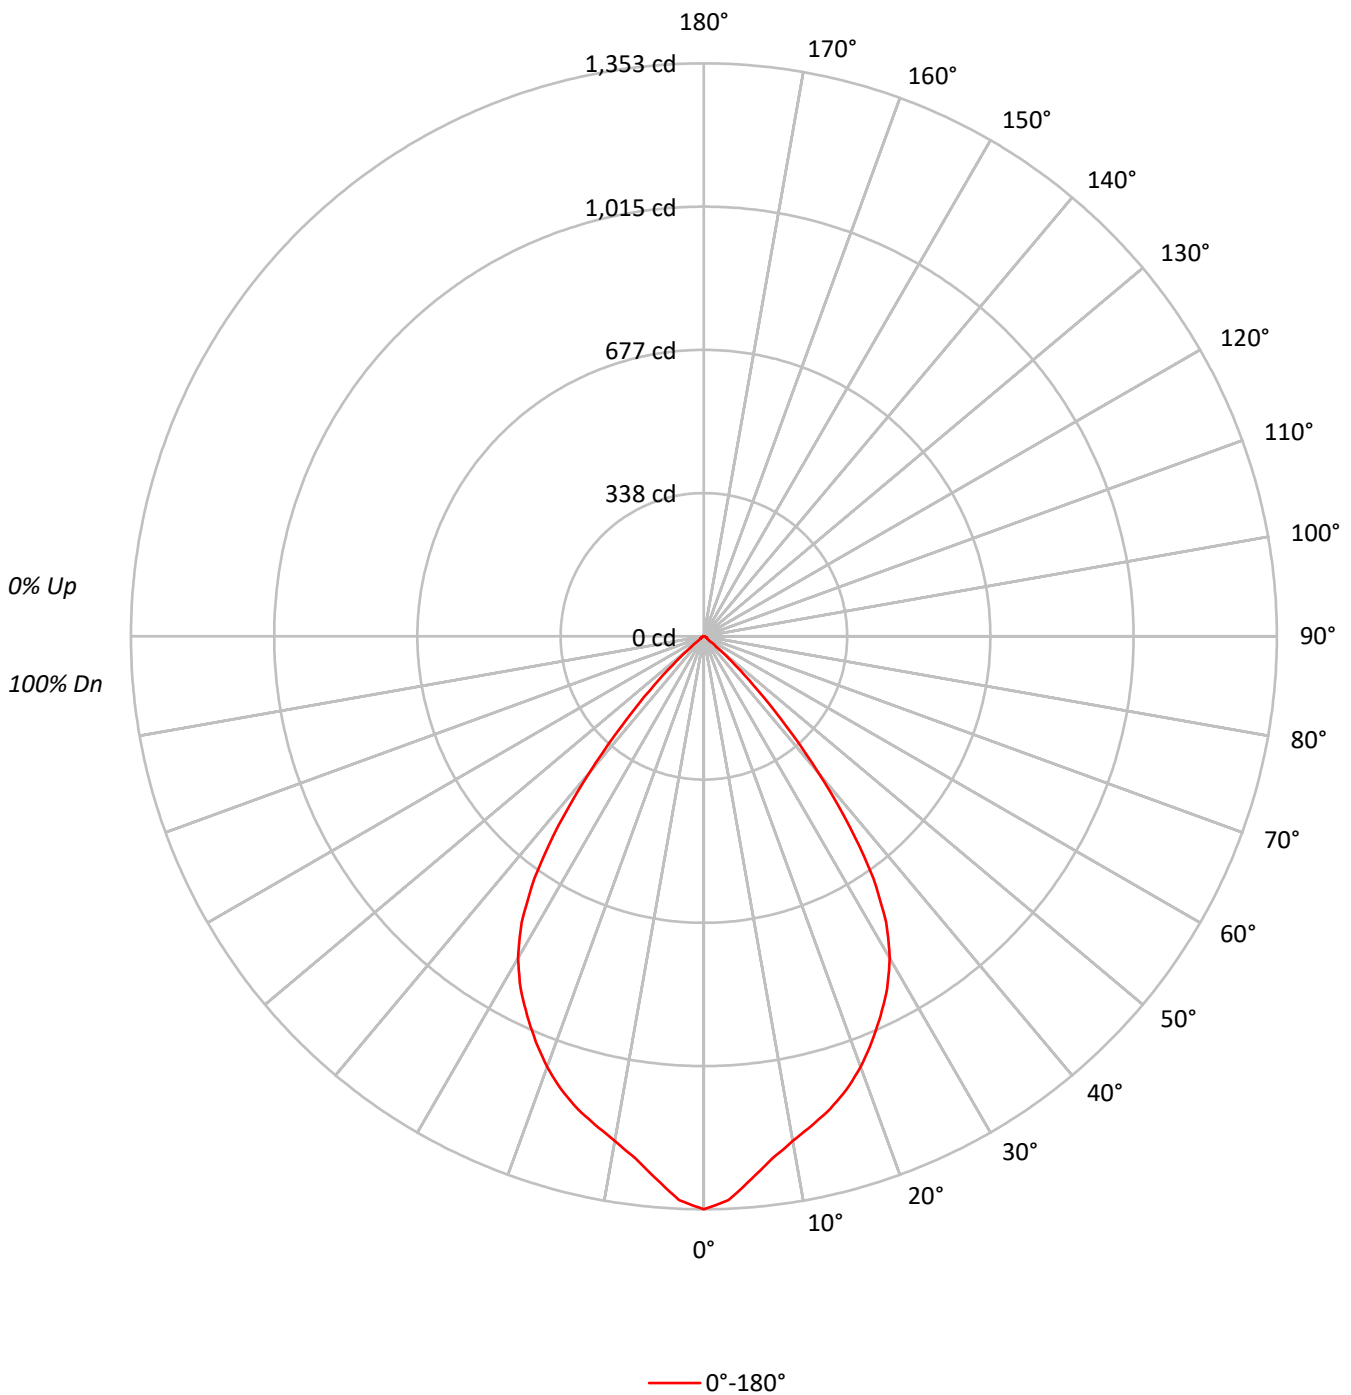



TEST NUMBER: P1302766

CATALOG NUMBER: P3AS17R70W2N902765DE010 E3CD1MB_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93	93	93	93
2	107	102	97	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	82	80	78	78	78	78
4	95	87	81	77	94	86	81	76	84	79	75	82	78	75	80	77	74	72	72	72	72
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66	66	66	66
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61	61	61	61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57	57	57	57
8	76	66	59	55	75	65	59	55	64	58	55	63	58	54	62	57	54	53	53	53	53
9	72	62	55	51	71	61	55	51	60	55	51	59	54	50	58	54	50	49	49	49	49
10	68	58	52	47	67	57	51	47	56	51	47	56	51	47	55	50	47	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	296665
5°	283072
10°	269334
15°	262135
20°	252465
25°	238925
30°	222237
35°	186689
40°	120311
45°	55913
50°	14669
55°	3670
60°	3684
65°	3113
70°	3077
75°	3050
80°	3031
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 55913 cd/sqm



TEST NUMBER: P1302766

CATALOG NUMBER: P3AS17R70W2N902765DE010 E3CD1MB_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.4	8.1
10°-20°	324.5	21.7
20°-30°	453.3	30.3
30°-40°	420.3	28.1
40°-50°	150.7	10.1
50°-60°	12.8	0.9
60°-70°	6.4	0.4
70°-80°	4.1	0.3
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	898.2	60.1
0°-40°	1318.5	88.2
0°-60°	1482.0	99.2
0°-90°	1494.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1494.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1353	
5°	1286	120
15°	1155	324
25°	988	453
35°	697	420
45°	180	151
55°	10	13
65°	6	6
75°	4	4
85°	1	2
90°	0	



TEST NUMBER: P1302766
CATALOG NUMBER: P3AS17R70W2N902765DE010 E3CD1MB_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1352.9
2.5°	1332.6
5°	1286.0
7.5°	1243.1
10°	1209.6
12.5°	1182.2
15°	1154.7
17.5°	1121.3
20°	1081.9
22.5°	1036.5
25°	987.5
27.5°	937.4
30°	877.7
32.5°	801.2
35°	697.4
37.5°	564.8
40°	420.3
42.5°	286.6
45°	180.3
47.5°	100.3
50°	43.0
52.5°	14.3
55°	9.6
57.5°	8.4
60°	8.4
62.5°	7.2
65°	6.0
67.5°	6.0
70°	4.8
72.5°	4.8
75°	3.6
77.5°	3.6
80°	2.4
82.5°	2.4
85°	1.2
87.5°	1.2
90°	0.0

(END OF REPORT)