

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1302874

Luminaire Tested: P3AS17R70W2N902765DE010 E3DLP1WH\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1302874  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R70W2N902765DE010 E3DLP1WH\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 3000K CCT AND, 90CRI ,  
E3DLP1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1202.0 lumens  
Efficiency: N/A  
Efficacy: 62.0 lumens/watt  
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1302874  
CATALOG NUMBER: P3AS17R70W2N902765DE010 E3DLP1WH\_3000K

### Luminous Intensity Polar Plot

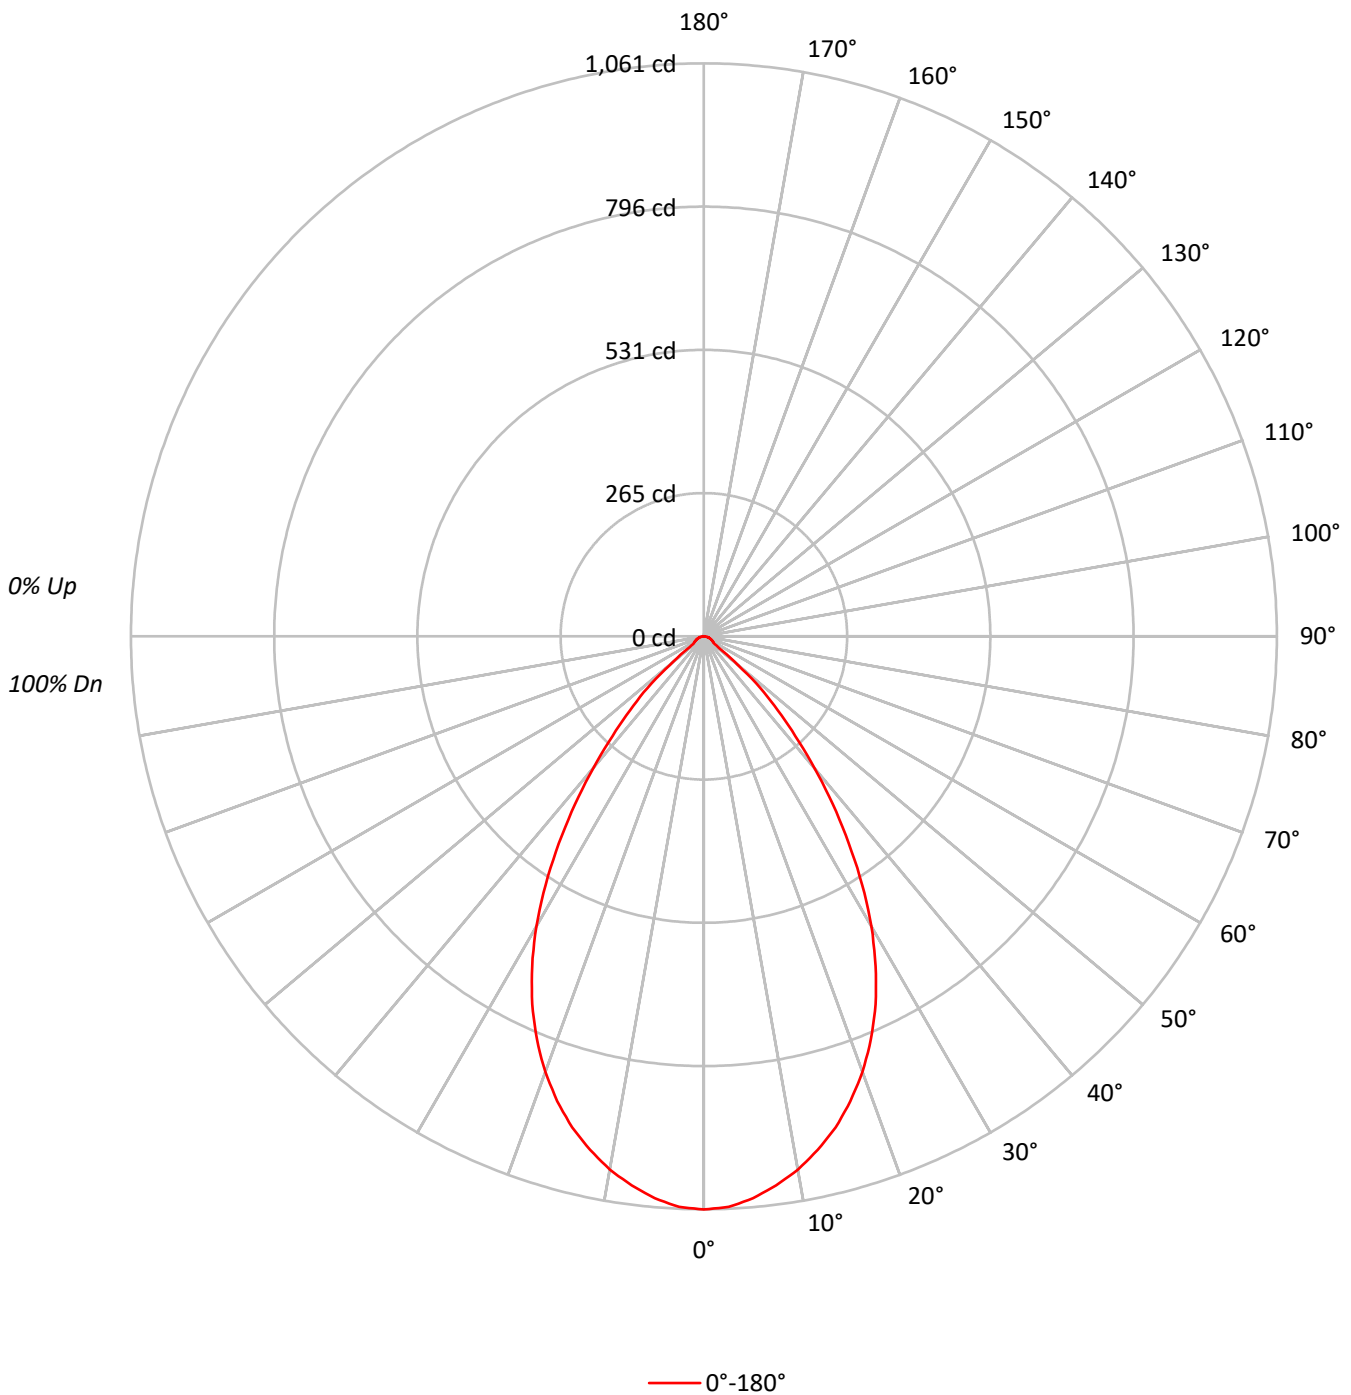



TEST NUMBER: P1302874  
 CATALOG NUMBER: P3AS17R70W2N902765DE010 E3DLP1WH\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	93	104	99	95	92	96	92	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	82	89	85	81	86	83	80	84	81	79	77	77	77	77
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70	70	70	70
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65	65	65	65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60	60	60	60
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55	55	55	55
8	75	65	58	53	74	64	58	53	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44	44	44	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	232701
5°	229914
10°	223265
15°	213804
20°	200287
25°	181946
30°	157163
35°	125253
40°	91228
45°	59975
50°	28110
55°	8678
60°	8377
65°	8042
70°	7629
75°	8049
80°	7577
85°	6038

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 59975 cd/sqm



TEST NUMBER: P1302874

CATALOG NUMBER: P3AS17R70W2N902765DE010 E3DLP1WH\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	98.4	8.2
10°-20°	263.6	21.9
20°-30°	342.6	28.5
30°-40°	290.7	24.2
40°-50°	149.9	12.5
50°-60°	28.9	2.4
60°-70°	15.6	1.3
70°-80°	9.6	0.8
80°-90°	2.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	704.5	58.6
0°-40°	995.2	82.8
0°-60°	1174.0	97.7
0°-90°	1202.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1202.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1061	
5°	1044	98
15°	942	264
25°	752	343
35°	468	291
45°	193	150
55°	23	29
65°	16	16
75°	10	10
85°	2	3
90°	0	



TEST NUMBER: P1302874  
CATALOG NUMBER: P3AS17R70W2N902765DE010 E3DLP1WH\_3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1061.2
2.5°	1057.6
5°	1044.5
7.5°	1025.4
10°	1002.7
12.5°	974.0
15°	941.8
17.5°	902.4
20°	858.3
22.5°	808.1
25°	752.0
27.5°	688.8
30°	620.7
32.5°	545.5
35°	467.9
37.5°	391.5
40°	318.7
42.5°	250.7
45°	193.4
47.5°	142.0
50°	82.4
52.5°	35.8
55°	22.7
57.5°	21.5
60°	19.1
62.5°	17.9
65°	15.5
67.5°	14.3
70°	11.9
72.5°	10.7
75°	9.5
77.5°	7.2
80°	6.0
82.5°	3.6
85°	2.4
87.5°	1.2
90°	0.0

(END OF REPORT)