

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246829

Luminaire Tested: P3A13R209024DE010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1246829
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R209024DE010 E3D1WH
Description: 3in Adjustable LED luminaire with, R20 optic, 2400K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1075.0 lumens
Efficiency: N/A
Efficacy: 73.6 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1246829
CATALOG NUMBER: P3A13R209024DE010 E3D1WH

Luminous Intensity Polar Plot

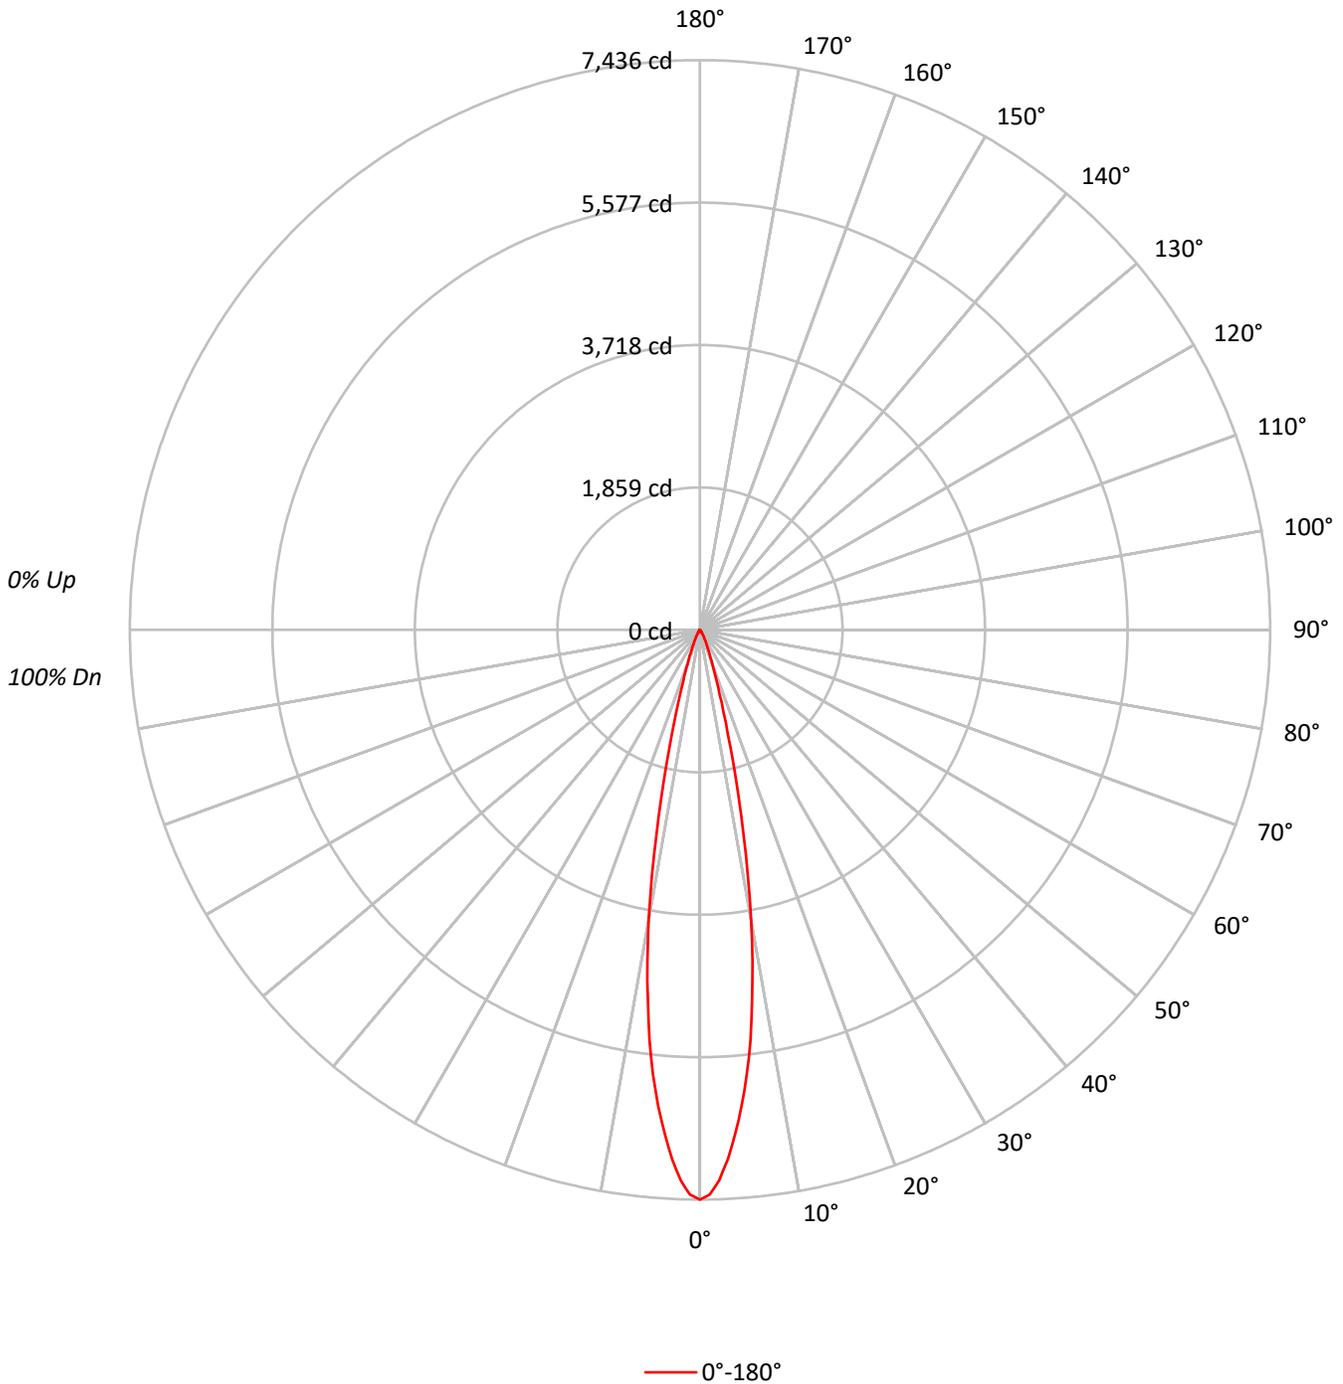



TEST NUMBER: P1246829
 CATALOG NUMBER: P3A13R209024DE010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	100
1	115	114	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	97	97
2	112	109	106	104	110	107	105	103	104	102	101	101	100	98	99	98	96	95	99	98	96
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94	93	97	95	94
4	106	101	98	95	105	100	97	95	99	96	94	97	95	93	95	93	92	91	95	93	92
5	104	98	95	92	102	98	94	92	96	93	91	95	92	90	93	91	90	89	93	91	90
6	101	96	92	89	100	95	92	89	94	91	89	93	90	88	92	89	88	87	92	89	88
7	99	93	90	87	98	93	89	87	92	89	86	91	88	86	90	87	86	85	90	87	86
8	97	91	87	85	96	91	87	85	90	87	85	89	86	84	88	86	84	83	88	86	84
9	95	89	85	83	94	89	85	83	88	85	83	87	84	83	87	84	82	81	87	84	82
10	93	87	84	81	92	87	83	81	86	83	81	86	83	81	85	83	81	80	85	83	81

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1630681
5°	1372966
10°	857544
15°	320592
20°	110050
25°	45874
30°	21598
35°	9664
40°	4580
45°	2357
50°	853
55°	153
60°	175
65°	208
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2357 cd/sqm



TEST NUMBER: P1246829
 CATALOG NUMBER: P3A13R209024DE010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	518.7	48.3
10°-20°	427.3	39.7
20°-30°	97.1	9.0
30°-40°	24.7	2.3
40°-50°	6.2	0.6
50°-60°	0.8	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1043.0	97.0
0°-40°	1067.7	99.3
0°-60°	1074.7	100.0
0°-90°	1075.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1075.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7436	
5°	6237	519
15°	1412	427
25°	190	97
35°	36	25
45°	8	6
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1246829
CATALOG NUMBER: P3A13R209024DE010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	7436.5
1°	7373.5
2°	7187.7
3°	6921.2
4°	6594.2
5°	6237.4
6°	5839.8
7°	5401.0
8°	4889.0
9°	4381.7
10°	3851.3
11°	3286.8
12°	2723.2
13°	2245.7
14°	1789.3
15°	1412.2
16°	1114.7
17°	879.3
18°	706.5
19°	574.6
20°	471.6
21°	394.3
22°	329.1
23°	273.6
24°	228.2
25°	189.6
27.5°	124.0
30°	85.3
32.5°	52.5
35°	36.1
37.5°	23.1
40°	16.0
42.5°	10.9
45°	7.6
47.5°	5.0
50°	2.5
52.5°	1.3
55°	0.4
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P1246829
CATALOG NUMBER: P3A13R209024DE010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)