

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1247246

Luminaire Tested: P3A17R259024DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1247246
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R259024DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R25 optic, 2400K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 912.0 lumens
Efficiency: N/A
Efficacy: 43.0 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1247246

CATALOG NUMBER: P3A17R259024DE010 E3DLD1WMH

Luminous Intensity Polar Plot

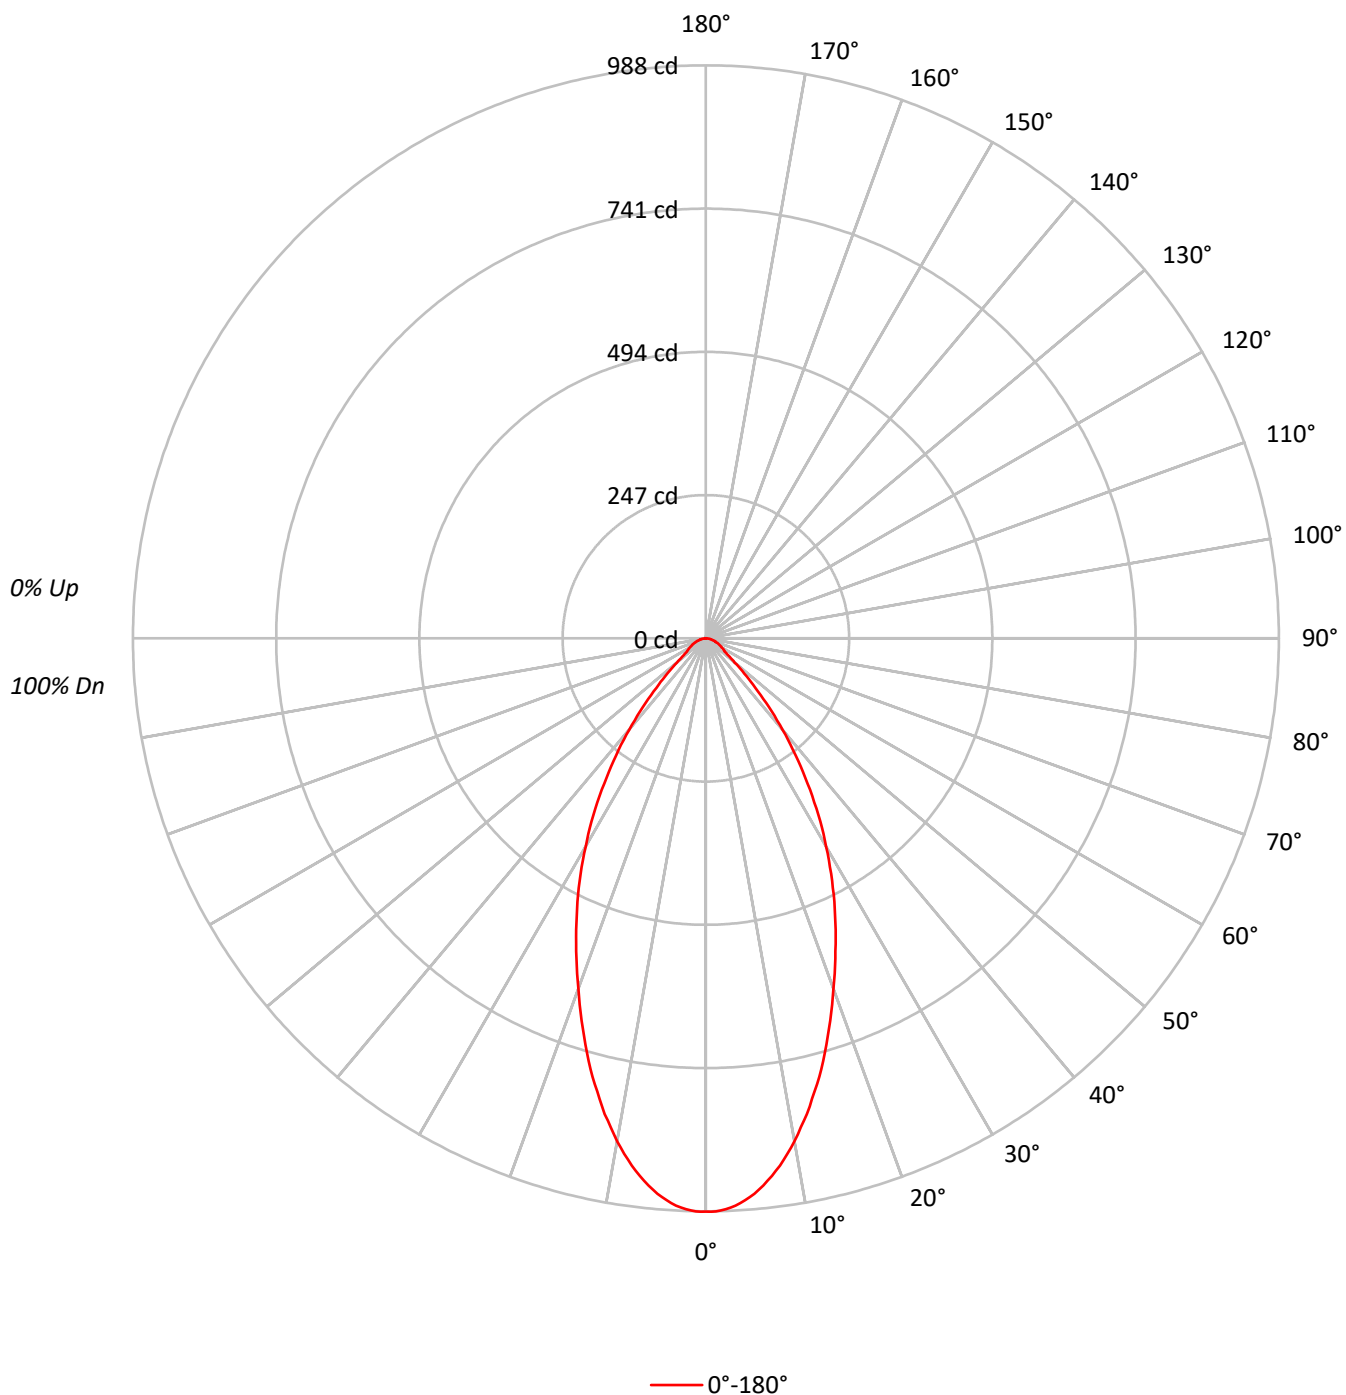

TEST NUMBER: P1247246

CATALOG NUMBER: P3A17R259024DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	216759
5°	211578
10°	196055
15°	174621
20°	150070
25°	127556
30°	105003
35°	81807
40°	58853
45°	37337
50°	22106
55°	15216
60°	13946
65°	12972
70°	11669
75°	10590
80°	10102
85°	8554

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 37337 cd/sqm

TEST NUMBER: P1247246

CATALOG NUMBER: P3A17R259024DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.1	9.8
10°-20°	213.5	23.4
20°-30°	241.3	26.5
30°-40°	190.8	20.9
40°-50°	96.4	10.6
50°-60°	38.6	4.2
60°-70°	24.7	2.7
70°-80°	13.6	1.5
80°-90°	3.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	543.9	59.6
0°-40°	734.8	80.6
0°-60°	869.8	95.4
0°-90°	912.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	912.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	988	
5°	961	89
15°	769	214
25°	527	241
35°	306	191
45°	120	96
55°	40	39
65°	25	25
75°	12	14
85°	3	4
90°	0	

TEST NUMBER: P1247246

CATALOG NUMBER: P3A17R259024DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	988.5
1°	988.5
2°	985.1
3°	979.4
4°	971.4
5°	961.2
6°	948.7
7°	933.9
8°	918.0
9°	899.8
10°	880.5
11°	858.9
12°	838.5
13°	814.6
14°	791.9
15°	769.2
17.5°	705.6
20°	643.1
22.5°	584.0
25°	527.2
27.5°	471.5
30°	414.7
32.5°	361.3
35°	305.6
37.5°	254.5
40°	205.6
42.5°	160.2
45°	120.4
47.5°	89.8
50°	64.8
52.5°	48.9
55°	39.8
57.5°	36.4
60°	31.8
62.5°	28.4
65°	25.0
67.5°	21.6
70°	18.2
72.5°	15.9
75°	12.5
77.5°	10.2
80°	8.0
82.5°	5.7
85°	3.4
87.5°	1.1



TEST NUMBER: P1247246

CATALOG NUMBER: P3A17R259024DE010 E3DLD1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)