

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1247605

Luminaire Tested: P3A20R309024D010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1247605
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A20R309024D010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R30 optic, 2400K CCT AND, 90CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1898.0 lumens
Efficiency: N/A
Efficacy: 65.9 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1247605

CATALOG NUMBER: P3A20R309024D010 E3CD1MMS

Luminous Intensity Polar Plot

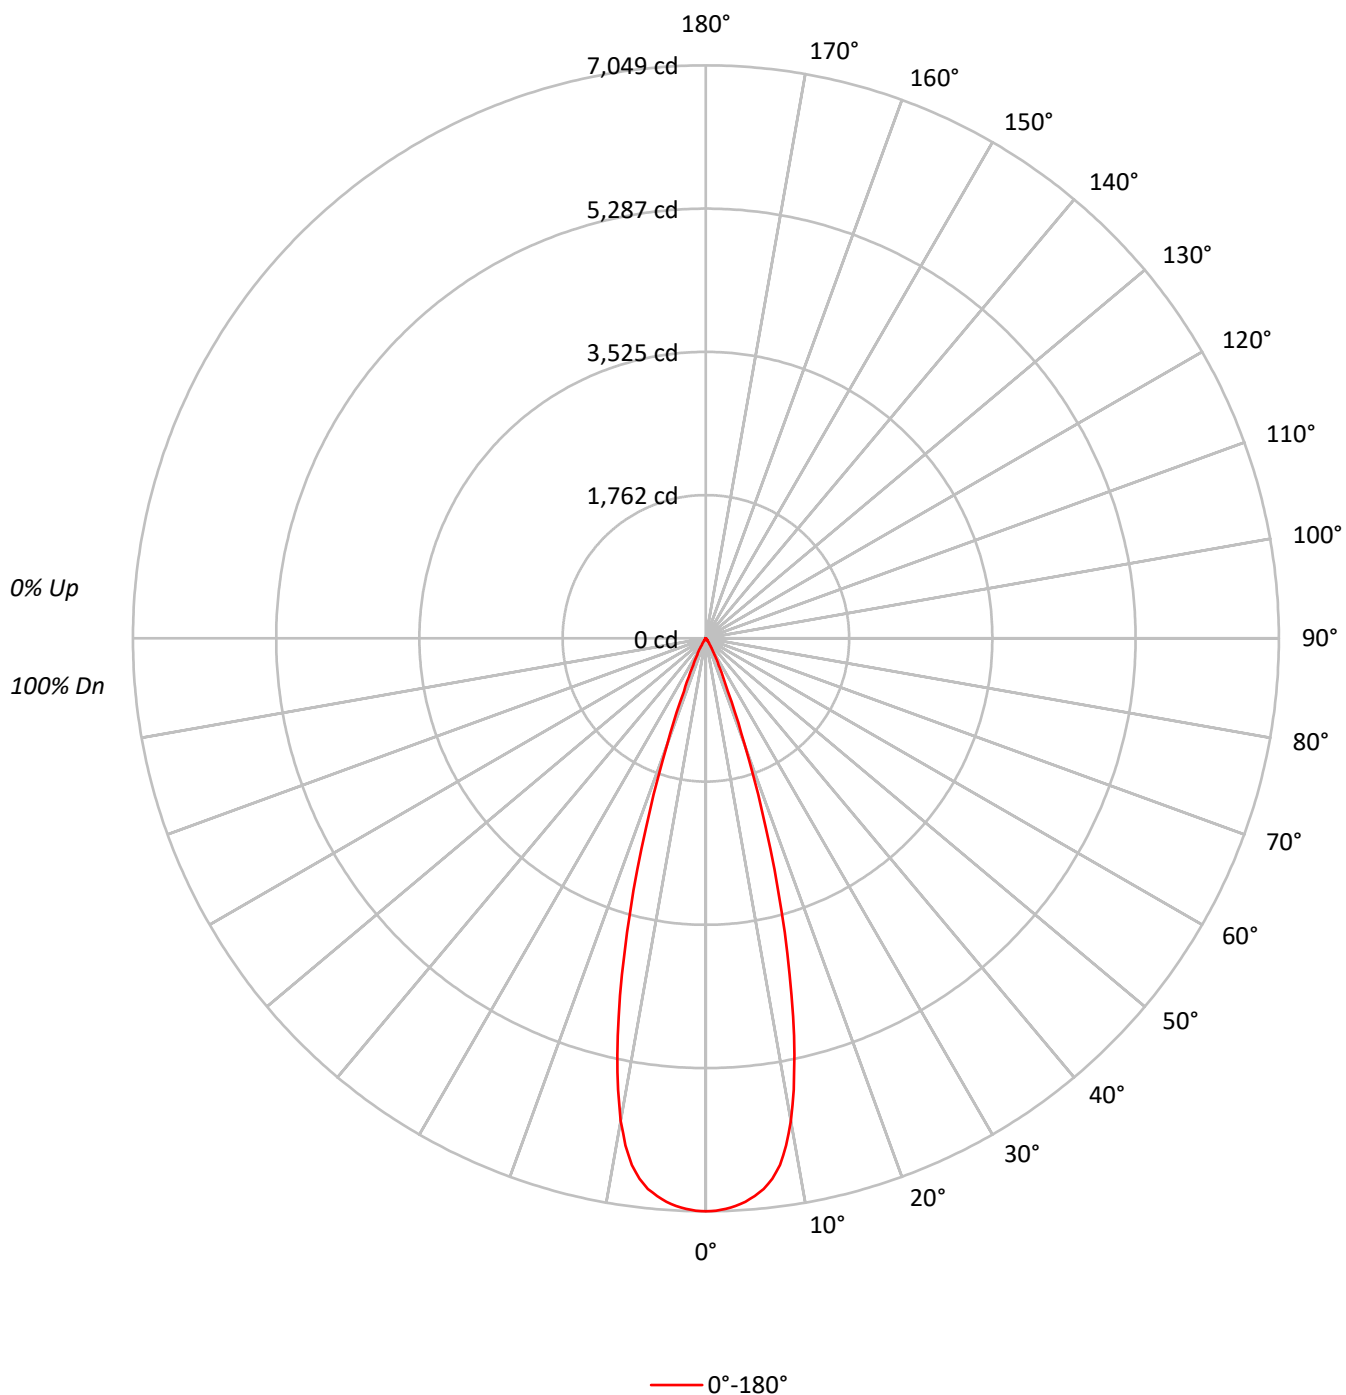

TEST NUMBER: P1247605

CATALOG NUMBER: P3A20R309024D010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	109		113	111	109	108		107	106	104		103	102	101		100	99	98
2	111	108	105	102		109	106	104	101		103	101	99		100	99	97		98	96	95
3	108	103	100	97		106	102	99	96		100	97	95		97	95	93		95	94	92
4	105	100	96	93		103	99	95	92		97	94	91		95	92	90		93	91	89
5	102	96	92	89		100	95	91	89		94	90	88		92	89	87		91	88	87
6	99	93	89	86		98	92	88	86		91	88	85		90	87	85		89	86	84
7	96	90	86	83		95	89	86	83		88	85	82		87	84	82		86	84	82
8	94	87	83	81		93	87	83	80		86	83	80		85	82	80		84	82	80
9	91	85	81	78		90	84	81	78		84	80	78		83	80	78		82	79	77
10	89	83	79	76		88	82	78	76		82	78	76		81	78	76		80	77	75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1545622
5°	1516395
10°	1342393
15°	850493
20°	322845
25°	95594
30°	37753
35°	11564
40°	5124
45°	1861
50°	1535
55°	1147
60°	1316
65°	1557
70°	962
75°	1271
80°	1894
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 80°
Luminance: 1894 cd/sqm

TEST NUMBER: P1247605

CATALOG NUMBER: P3A20R309024D010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	633.3	33.4
10°-20°	986.9	52.0
20°-30°	229.2	12.1
30°-40°	35.5	1.9
40°-50°	6.1	0.3
50°-60°	2.9	0.2
60°-70°	2.4	0.1
70°-80°	1.6	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1849.4	97.4
0°-40°	1884.9	99.3
0°-60°	1893.9	99.8
0°-90°	1898.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1898.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7049	
5°	6889	633
15°	3746	987
25°	395	229
35°	43	36
45°	6	6
55°	3	3
65°	3	2
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1247605

CATALOG NUMBER: P3A20R309024D010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	7048.6
1°	7044.1
2°	7024.7
3°	6991.9
4°	6950.2
5°	6889.0
6°	6813.0
7°	6699.7
8°	6544.7
9°	6316.6
10°	6028.8
11°	5657.6
12°	5238.7
13°	4773.6
14°	4262.2
15°	3746.4
17.5°	2450.9
20°	1383.5
22.5°	706.6
25°	395.1
27.5°	243.0
30°	149.1
32.5°	80.5
35°	43.2
37.5°	28.3
40°	17.9
42.5°	10.4
45°	6.0
47.5°	4.5
50°	4.5
52.5°	3.0
55°	3.0
57.5°	3.0
60°	3.0
62.5°	3.0
65°	3.0
67.5°	1.5
70°	1.5
72.5°	1.5
75°	1.5
77.5°	1.5
80°	1.5
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1247605

CATALOG NUMBER: P3A20R309024D010 E3CD1MMS

CANDELA DISTRIBUTION (continued):



(END OF REPORT)