

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1245548

Luminaire Tested: P3A02R109024DE010 E3DLP1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245548
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02R109024DE010 E3DLP1H
Description: 3in Adjustable LED luminaire with, R10 optic, 2400K CCT AND, 90CRI , E3DLP1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 122.0 lumens
Efficiency: N/A
Efficacy: 32.1 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1245548
CATALOG NUMBER: P3A02R109024DE010 E3DLP1H

Luminous Intensity Polar Plot

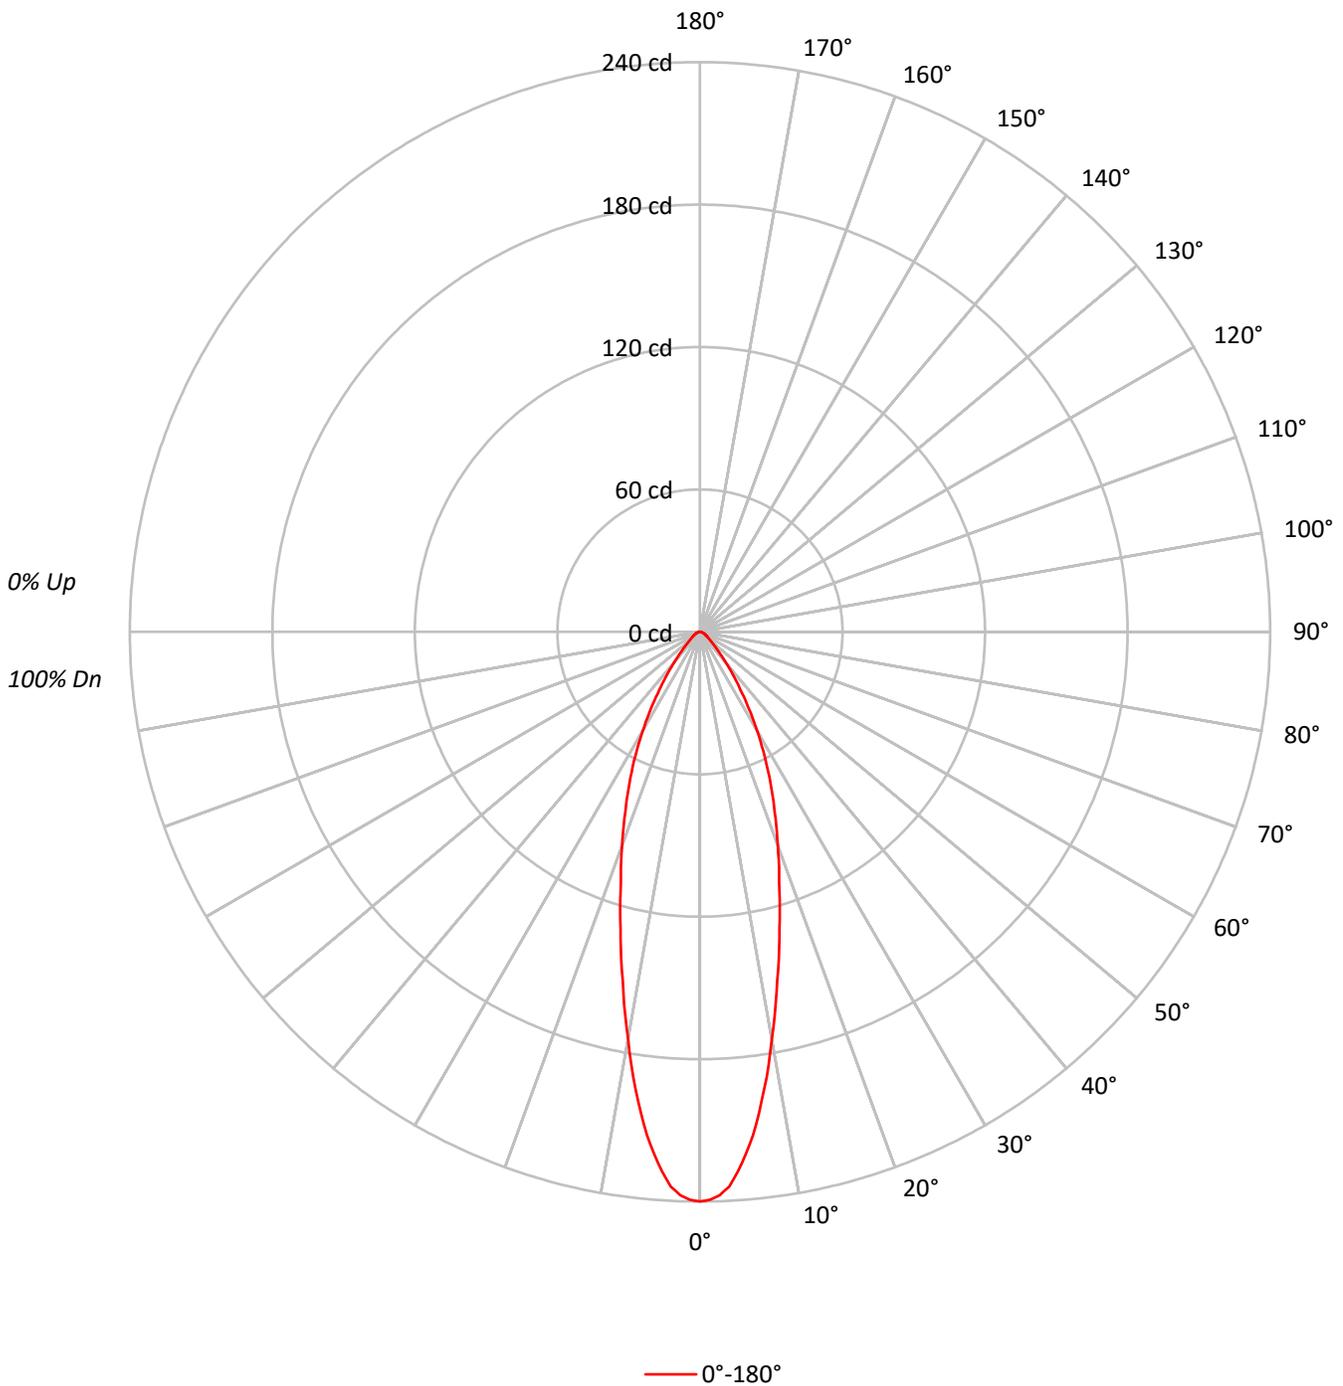



TEST NUMBER: P1245548
 CATALOG NUMBER: P3A02R109024DE010 E3DLP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	106	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93
2	108	103	98	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86	86	86	86
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80	80	80	80
4	97	90	84	80	95	88	83	79	86	82	78	84	81	77	82	79	77	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66	66	66	66
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62	62	62	62
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	67	63	60	59	59	59	59
9	77	68	62	58	76	67	62	58	66	61	58	65	61	57	64	60	57	56	56	56	56
10	74	64	59	55	73	64	59	55	63	58	55	62	58	55	62	57	54	53	53	53	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	52605
5°	48624
10°	38810
15°	29330
20°	22332
25°	17009
30°	12179
35°	7950
40°	4866
45°	2946
50°	1944
55°	1529
60°	1316
65°	1141
70°	1026
75°	1017
80°	758
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2946 cd/sqm



TEST NUMBER: P1245548
 CATALOG NUMBER: P3A02R109024DE010 E3DLP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	19.6	16.0
10°-20°	36.1	29.6
20°-30°	32.1	26.3
30°-40°	19.0	15.6
40°-50°	7.8	6.4
50°-60°	3.7	3.0
60°-70°	2.2	1.8
70°-80°	1.2	1.0
80°-90°	0.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	87.8	72.0
0°-40°	106.8	87.5
0°-60°	118.3	96.9
0°-90°	122.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	122.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	240	
5°	221	20
15°	129	36
25°	70	32
35°	30	19
45°	10	8
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1245548
CATALOG NUMBER: P3A02R109024DE010 E3DLP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	239.9
1°	239.3
2°	237.5
3°	234.0
4°	228.0
5°	220.9
6°	213.2
7°	204.1
8°	194.5
9°	184.8
10°	174.3
12.5°	150.4
15°	129.2
17.5°	110.9
20°	95.7
22.5°	82.2
25°	70.3
27.5°	58.8
30°	48.1
32.5°	38.4
35°	29.7
37.5°	22.8
40°	17.0
42.5°	12.7
45°	9.5
47.5°	7.3
50°	5.7
52.5°	4.8
55°	4.0
57.5°	3.4
60°	3.0
62.5°	2.6
65°	2.2
67.5°	2.0
70°	1.6
72.5°	1.4
75°	1.2
77.5°	0.8
80°	0.6
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)