

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1245606

Luminaire Tested: P3A02R159024DE010 E3DLD1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245606
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02R159024DE010 E3DLD1H
Description: 3in Adjustable LED luminaire with, R15 optic, 2400K CCT AND, 90CRI , E3DLD1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 170.0 lumens
Efficiency: N/A
Efficacy: 47.2 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1245606

CATALOG NUMBER: P3A02R159024DE010 E3DLD1H

Luminous Intensity Polar Plot

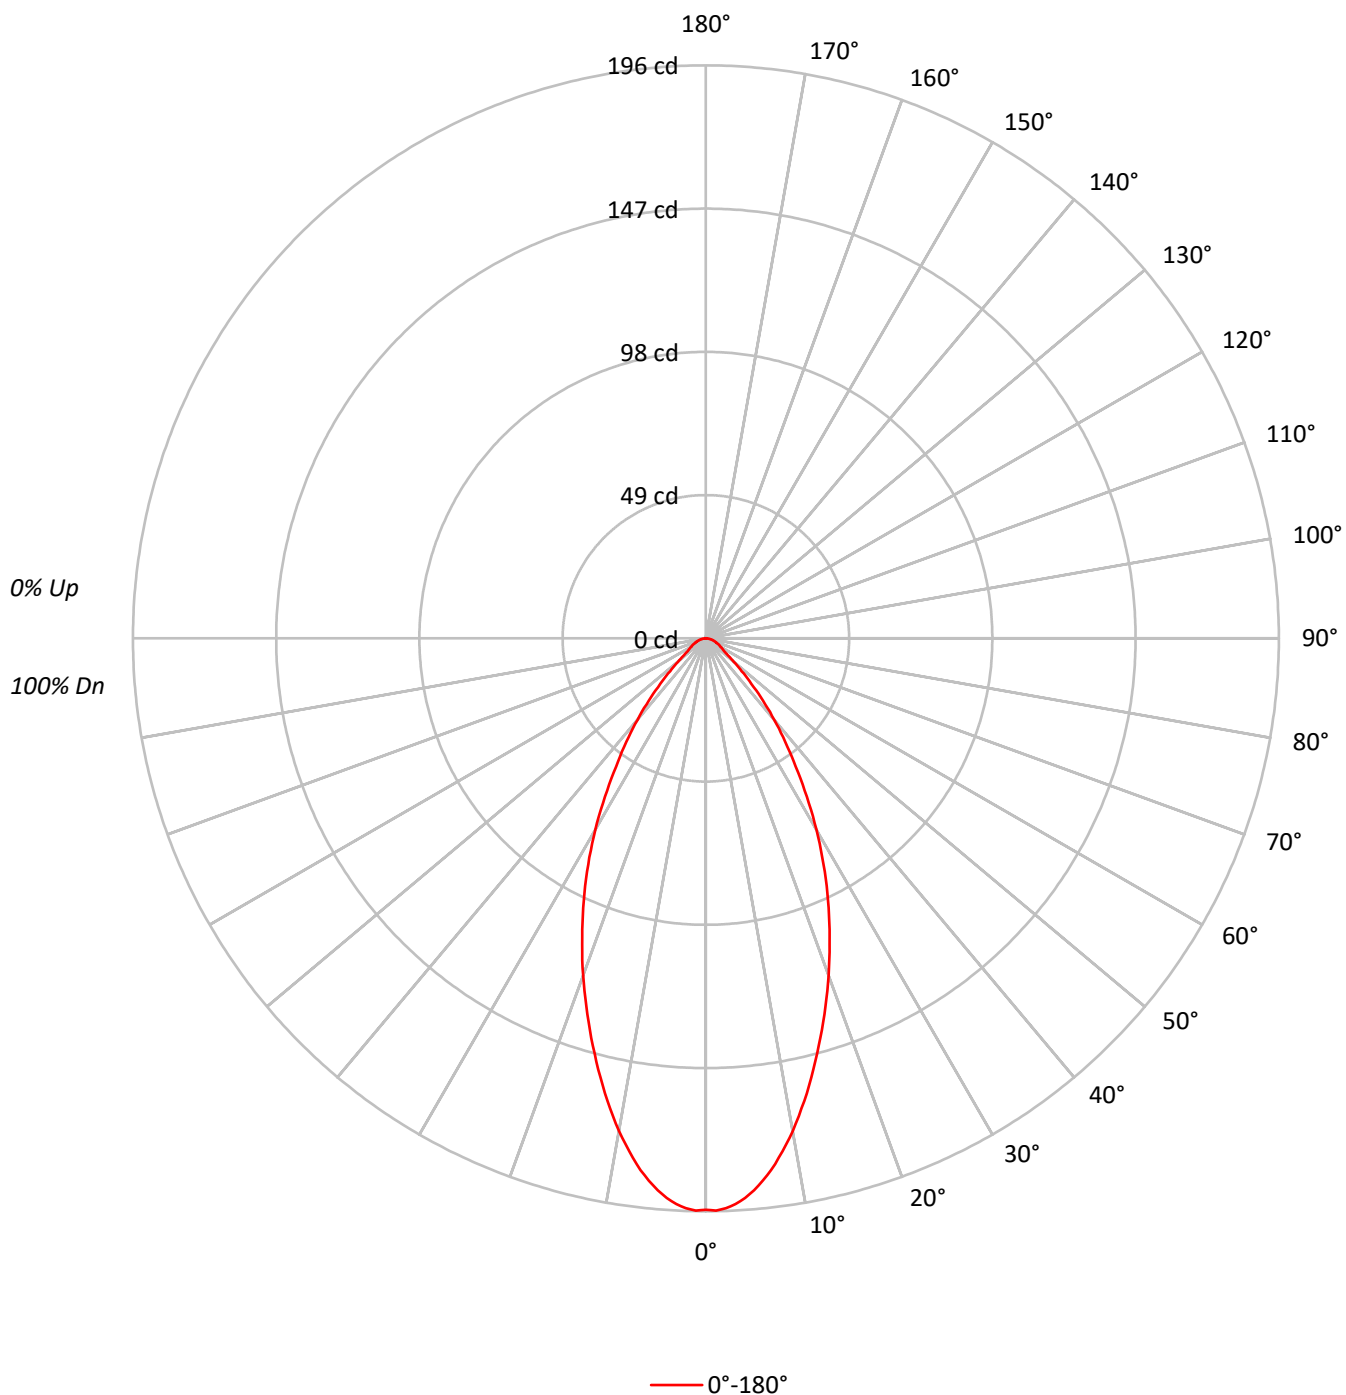

TEST NUMBER: P1245606

CATALOG NUMBER: P3A02R159024DE010 E3DLD1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	109	107	104		110	107	105	102		103	101	99		99	98	96		96	95	93
2	106	100	96	92		104	99	95	91		95	92	89		92	90	87		90	87	85
3	100	93	87	83		98	91	86	82		89	84	81		86	82	79		84	81	78
4	94	86	80	75		92	85	79	74		82	77	73		80	76	73		78	75	72
5	89	80	73	68		87	79	73	68		77	72	67		75	71	67		74	69	66
6	84	74	68	63		83	73	67	63		72	66	62		70	66	62		69	65	61
7	80	69	63	58		78	69	63	58		67	62	58		66	61	57		65	61	57
8	76	65	59	54		74	65	58	54		63	58	54		62	57	54		61	57	53
9	72	61	55	51		71	61	55	51		60	54	50		59	54	50		58	53	50
10	68	58	52	48		67	57	51	47		57	51	47		56	51	47		55	50	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	42869
5°	41712
10°	38120
15°	33394
20°	28656
25°	23929
30°	19142
35°	14348
40°	10420
45°	6822
50°	4264
55°	2867
60°	2544
65°	2335
70°	2180
75°	2033
80°	1894
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6822 cd/sqm

TEST NUMBER: P1245606

CATALOG NUMBER: P3A02R159024DE010 E3DLD1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	17.5	10.3
10°-20°	41.0	24.1
20°-30°	45.2	26.6
30°-40°	33.8	19.9
40°-50°	17.5	10.3
50°-60°	7.3	4.3
60°-70°	4.5	2.6
70°-80°	2.5	1.5
80°-90°	0.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	103.6	61.0
0°-40°	137.5	80.9
0°-60°	162.3	95.4
0°-90°	170.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	170.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	196	
5°	190	17
15°	147	41
25°	99	45
35°	54	34
45°	22	18
55°	8	7
65°	4	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1245606

CATALOG NUMBER: P3A02R159024DE010 E3DLD1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	195.5
1°	195.8
2°	195.1
3°	193.8
4°	191.9
5°	189.5
6°	186.5
7°	183.3
8°	179.4
9°	175.3
10°	171.2
12.5°	159.4
15°	147.1
17.5°	134.8
20°	122.8
22.5°	110.5
25°	98.9
27.5°	87.2
30°	75.6
32.5°	64.2
35°	53.6
37.5°	44.6
40°	36.4
42.5°	28.9
45°	22.0
47.5°	16.6
50°	12.5
52.5°	9.3
55°	7.5
57.5°	6.7
60°	5.8
62.5°	5.2
65°	4.5
67.5°	3.9
70°	3.4
72.5°	2.8
75°	2.4
77.5°	1.9
80°	1.5
82.5°	1.1
85°	0.6
87.5°	0.2
90°	0.0

(END OF REPORT)