

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1245736

Luminaire Tested: P3A02R359024DE010 E3PHLD1MW

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1245736  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-20)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A02R359024DE010 E3PHLD1MW  
Description: 3in Adjustable LED luminaire with, R35 optic, 2400K CCT AND, 90CRI , E3PHLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 167.0 lumens  
Efficiency: N/A  
Efficacy: 46.4 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.92  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 3.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1245736  
CATALOG NUMBER: P3A02R359024DE010 E3PHLD1MW

### Luminous Intensity Polar Plot

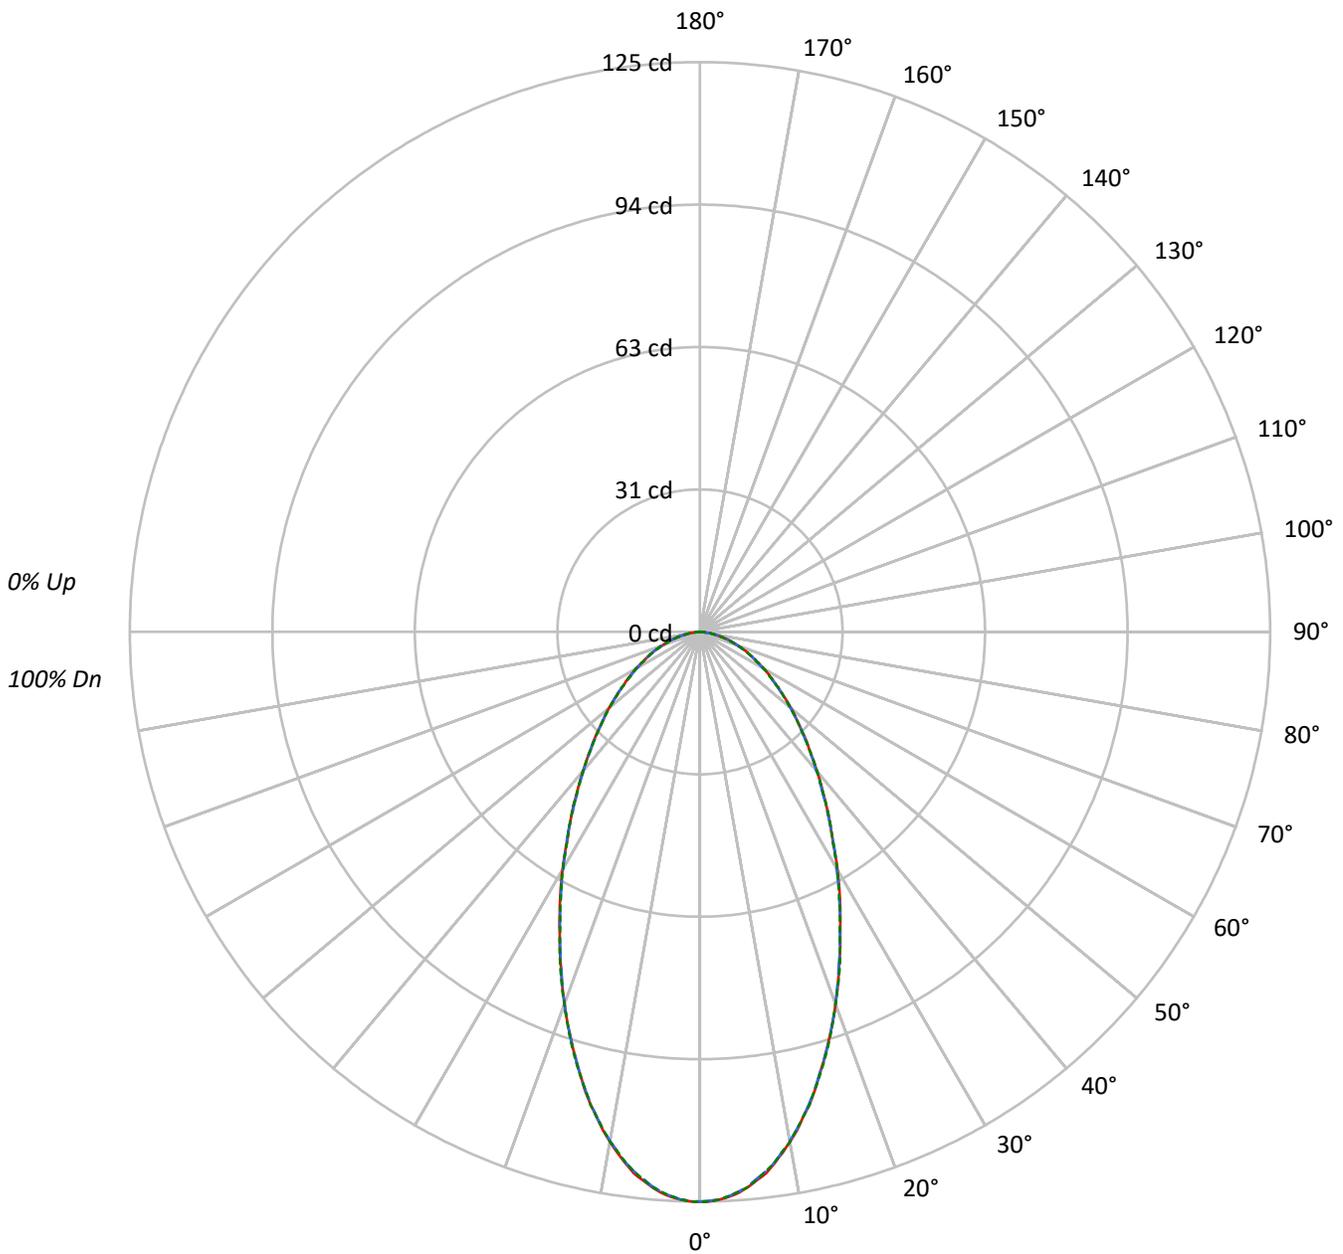

— 0°-180°    - - 45°-225°    - · - · 90°-270°



TEST NUMBER: P1245736  
 CATALOG NUMBER: P3A02R359024DE010 E3PHLD1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	111	107	103	100	108	105	101	99	100	98	95	97	95	93	93	91	90	93	91	90	88
2	103	96	90	85	100	94	89	84	90	86	82	87	84	81	84	81	79	84	81	79	77
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	77	73	70	68
4	88	78	71	65	86	77	70	65	75	68	64	72	67	63	70	66	62	70	66	62	60
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	65	60	56	54
6	77	65	58	52	75	65	57	52	63	56	51	61	55	51	60	55	51	60	55	51	49
7	72	60	53	47	71	60	52	47	58	52	47	57	51	46	55	50	46	55	50	46	44
8	68	56	48	43	66	55	48	43	54	47	43	53	47	43	52	46	42	52	46	42	41
9	64	52	45	40	63	51	44	40	50	44	39	49	44	39	48	43	39	48	43	39	38
10	60	49	42	37	59	48	41	37	47	41	37	46	41	36	45	40	36	45	40	36	35

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	27410	27410	27410
5°	26898	26854	26898
10°	25295	25250	25295
15°	22906	22906	22951
20°	20278	20278	20278
25°	17614	17566	17566
30°	15268	15167	15218
35°	13144	13090	13144
40°	11421	11364	11421
45°	10017	9955	9955
50°	8904	8836	8836
55°	7837	7837	7837
60°	7105	6973	7105
65°	6382	6382	6382
70°	5642	5642	5642
75°	5083	4914	5083
80°	4293	4293	4293
85°	2768	2768	2768

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 10017 cd/sqm



TEST NUMBER: P1245736  
 CATALOG NUMBER: P3A02R359024DE010 E3PHLD1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	11.4	6.8
10°-20°	28.1	16.9
20°-30°	33.4	20.0
30°-40°	30.7	18.4
40°-50°	25.0	14.9
50°-60°	18.5	11.1
60°-70°	12.2	7.3
70°-80°	6.3	3.8
80°-90°	1.4	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	72.9	43.7
0°-40°	103.7	62.1
0°-60°	147.1	88.1
0°-90°	167.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	167.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	125	125	125	125	125	
5°	122	122	122	122	122	11
15°	101	101	101	101	101	28
25°	73	73	73	73	73	33
35°	49	49	49	49	49	31
45°	32	32	32	32	32	25
55°	20	20	20	20	20	19
65°	12	12	12	12	12	12
75°	6	6	6	6	6	6
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P1245736  
 CATALOG NUMBER: P3A02R359024DE010 E3PHLD1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	125.0	125.0	125.0	125.0	125.0
1°	125.0	124.8	124.8	124.8	125.0
2°	124.6	124.6	124.6	124.6	124.6
3°	124.1	123.9	123.9	123.9	123.9
4°	123.3	123.1	123.1	123.1	123.1
5°	122.2	122.0	122.0	122.0	122.2
6°	120.9	120.7	120.5	120.5	120.7
7°	119.6	119.2	119.2	119.2	119.2
8°	117.7	117.5	117.5	117.5	117.5
9°	115.7	115.3	115.5	115.5	115.5
10°	113.6	113.4	113.4	113.4	113.6
11°	111.4	111.2	111.2	111.0	111.2
12°	108.8	108.8	108.8	108.8	108.8
13°	106.5	106.3	106.3	106.3	106.5
14°	103.9	103.7	103.7	103.7	103.7
15°	100.9	100.9	100.9	100.9	101.1
17.5°	94.0	93.8	94.0	94.0	94.2
20°	86.9	86.6	86.9	86.9	86.9
22.5°	79.7	79.7	79.5	79.7	80.0
25°	72.8	72.6	72.6	72.8	72.6
27.5°	66.4	66.2	66.2	66.2	66.2
30°	60.3	59.9	59.9	60.1	60.1
32.5°	54.1	54.1	54.3	54.1	54.1
35°	49.1	48.9	48.9	49.1	49.1
37.5°	44.2	44.0	44.0	44.2	44.2
40°	39.9	39.9	39.7	39.9	39.9
42.5°	35.8	35.8	35.8	35.8	35.8
45°	32.3	32.1	32.1	32.1	32.1
47.5°	28.9	28.9	28.9	28.7	28.9
50°	26.1	25.9	25.9	25.9	25.9
52.5°	23.1	23.1	23.1	23.1	23.1
55°	20.5	20.5	20.5	20.5	20.5
57.5°	18.3	18.1	18.1	18.1	18.1
60°	16.2	16.2	15.9	16.2	16.2
62.5°	14.0	14.0	14.0	14.0	14.0
65°	12.3	12.3	12.3	12.3	12.3
67.5°	10.6	10.6	10.6	10.6	10.6
70°	8.8	8.8	8.8	8.8	8.8
72.5°	7.5	7.3	7.3	7.3	7.3
75°	6.0	6.0	5.8	6.0	6.0
77.5°	4.5	4.5	4.5	4.5	4.5
80°	3.4	3.4	3.4	3.2	3.4
82.5°	2.2	2.2	2.2	2.2	2.2
85°	1.1	1.1	1.1	1.1	1.1
87.5°	0.2	0.2	0.2	0.4	0.4



TEST NUMBER: P1245736  
CATALOG NUMBER: P3A02R359024DE010 E3PHLD1MW

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)