

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1245765

Luminaire Tested: P3A02R409024DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245765
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02R409024DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R40 optic, 2400K CCT AND, 90CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 250.0 lumens
Efficiency: N/A
Efficacy: 69.4 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1245765

CATALOG NUMBER: P3A02R409024DE010 E3DLP1WH

Luminous Intensity Polar Plot

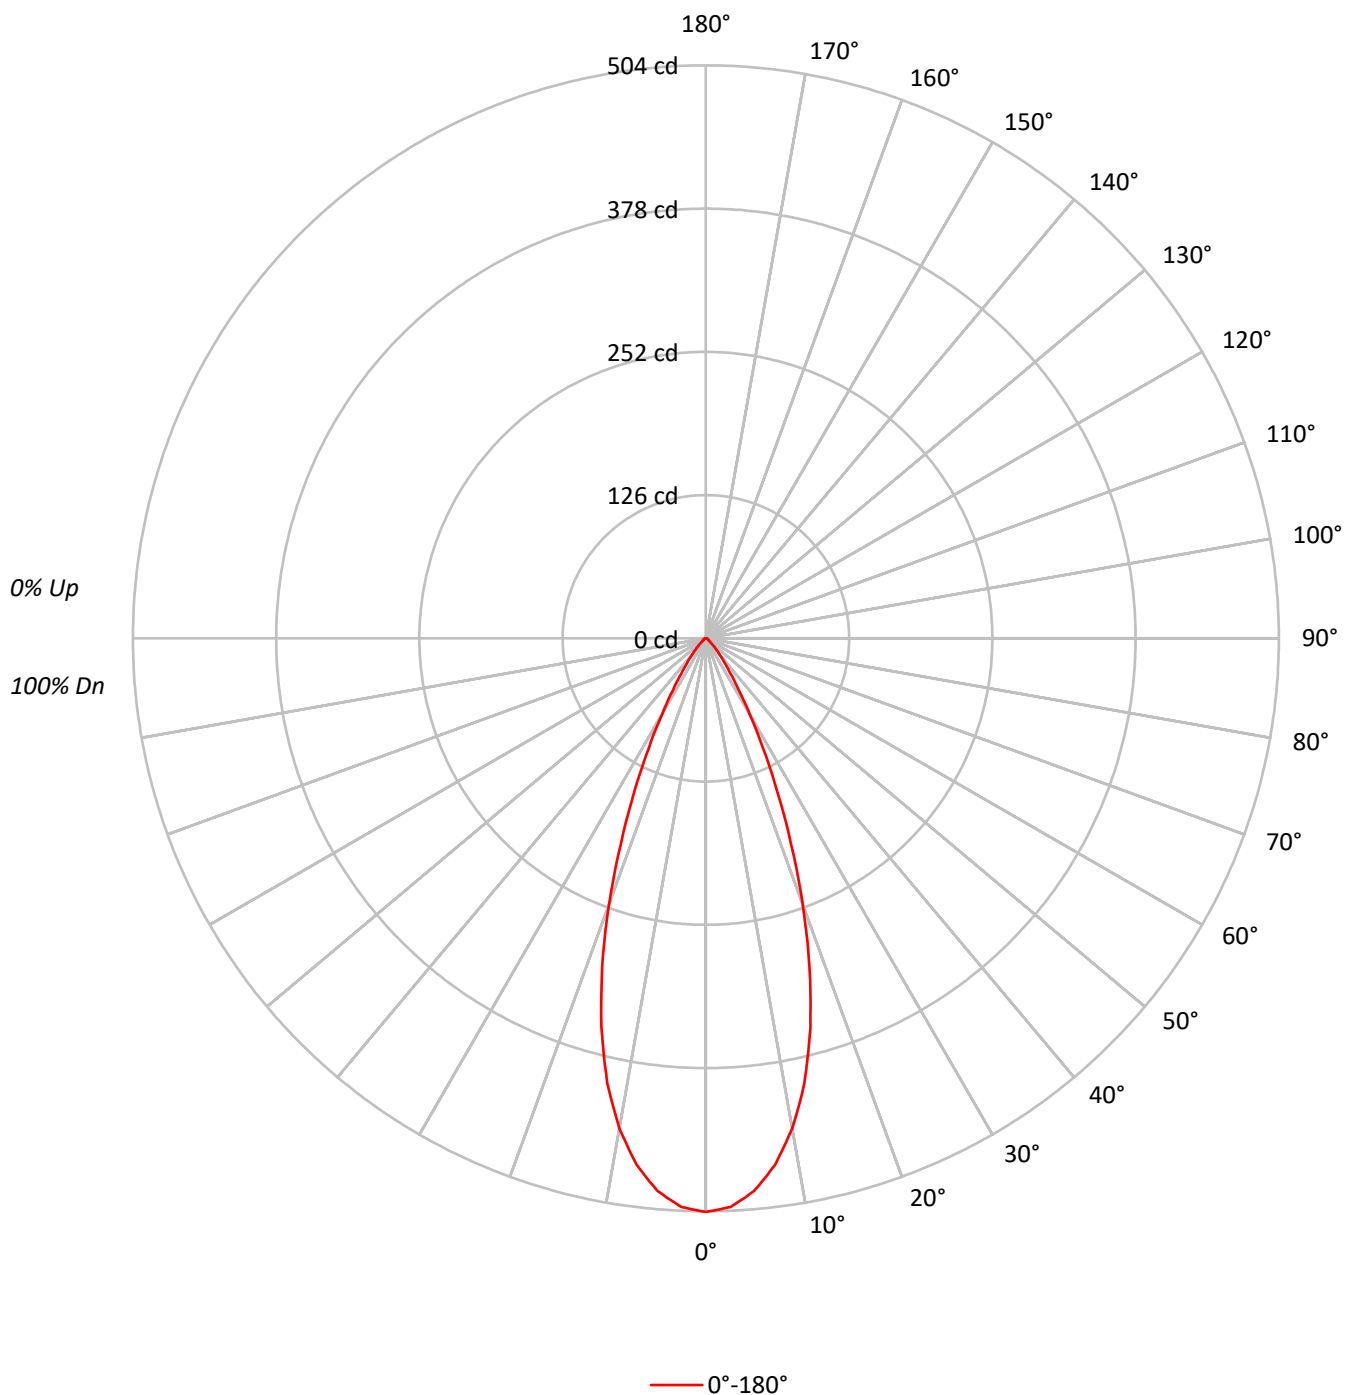

TEST NUMBER: P1245765

CATALOG NUMBER: P3A02R409024DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	96	96	94
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	91	91	89
3	104	99	94	91	102	97	93	90	95	91	88	92	89	87	90	88	86	86	86	84
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	81	81	80
5	96	88	83	79	94	88	83	79	86	82	78	84	81	78	83	80	77	77	77	76
6	92	84	79	75	91	83	78	75	82	78	74	81	77	74	79	76	73	73	73	72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	70	70	69
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	67	67	65
9	82	73	68	64	81	73	68	64	72	67	64	71	67	64	70	66	64	64	64	63
10	78	70	65	62	78	70	65	61	69	64	61	68	64	61	67	64	61	61	61	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	110627
5°	107418
10°	97460
15°	80523
20°	58082
25°	35929
30°	19446
35°	10065
40°	5467
45°	3070
50°	1535
55°	1147
60°	1053
65°	986
70°	962
75°	932
80°	758
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3070 cd/sqm

TEST NUMBER: P1245765

CATALOG NUMBER: P3A02R409024DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	45.0	18.0
10°-20°	96.6	38.6
20°-30°	68.9	27.6
30°-40°	25.4	10.2
40°-50°	8.0	3.2
50°-60°	2.8	1.1
60°-70°	1.9	0.8
70°-80°	1.1	0.5
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	210.5	84.2
0°-40°	235.9	94.4
0°-60°	246.7	98.7
0°-90°	250.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	250.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	504	
5°	488	45
15°	355	97
25°	148	69
35°	38	25
45°	10	8
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1245765

CATALOG NUMBER: P3A02R409024DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	504.5
2.5°	500.6
5°	488.0
7.5°	466.9
10°	437.7
12.5°	400.6
15°	354.7
17.5°	303.2
20°	248.9
22.5°	195.5
25°	148.5
27.5°	109.0
30°	76.8
32.5°	53.9
35°	37.6
37.5°	26.6
40°	19.1
42.5°	13.7
45°	9.9
47.5°	6.7
50°	4.5
52.5°	3.2
55°	3.0
57.5°	2.8
60°	2.4
62.5°	2.1
65°	1.9
67.5°	1.7
70°	1.5
72.5°	1.3
75°	1.1
77.5°	0.9
80°	0.6
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)