

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1250818

Luminaire Tested: P3A02R359030DE010 E3PHLP1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1250818
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02R359030DE010 E3PHLP1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 90CRI , E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 160.0 lumens
Efficiency: N/A
Efficacy: 44.5 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.68 / 0.73
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1250818

CATALOG NUMBER: P3A02R359030DE010 E3PHLP1MW

Luminous Intensity Polar Plot

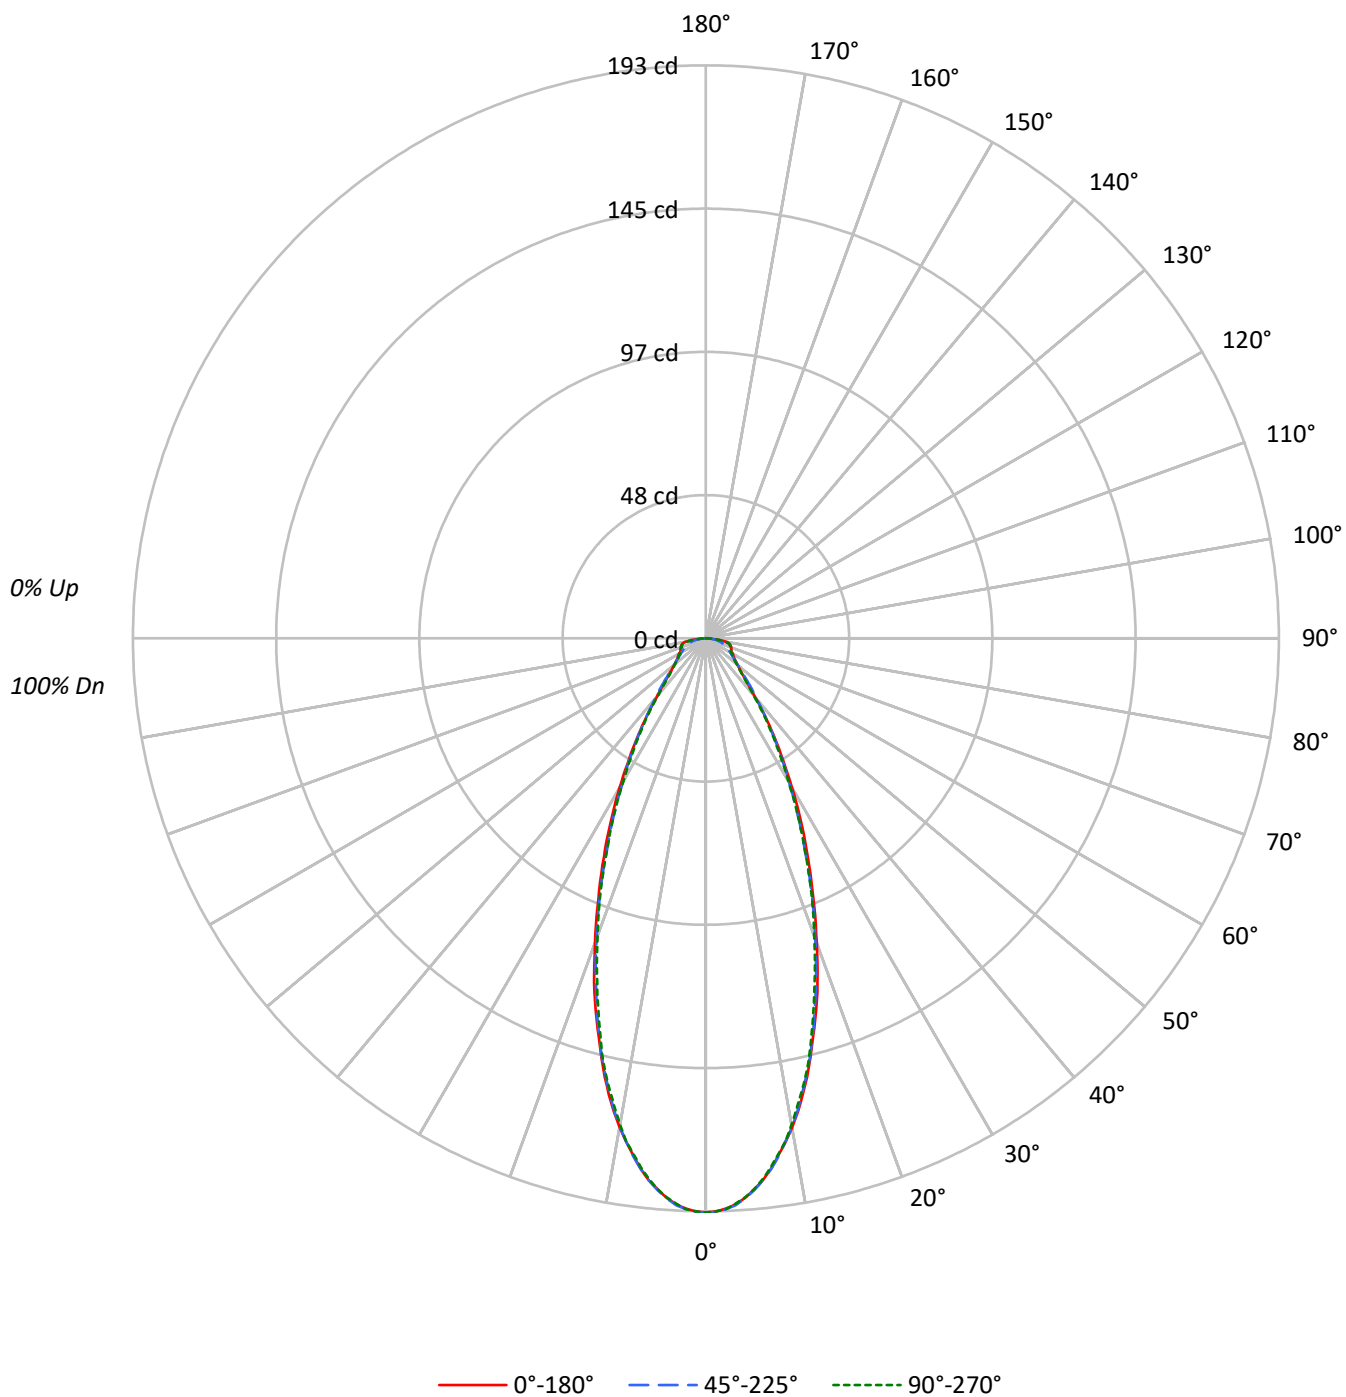

TEST NUMBER: P1250818

CATALOG NUMBER: P3A02R359030DE010 E3PHLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	111	107	104	101	109	105	102	99	101	99	96		97	95	93		94
2	104	98	92	88	101	96	91	87	92	88	85		89	86	83		86
3	97	89	83	78	95	88	82	77	85	80	76		82	78	75		80
4	92	82	75	70	90	81	75	70	79	73	69		77	72	68		75
5	86	76	69	64	84	75	69	64	73	68	63		72	67	63		70
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	60	55	76	66	59	54	64	58	54		63	58	54		62
8	73	62	56	51	72	62	55	51	61	55	51		60	54	50		59
9	70	59	52	48	68	58	52	48	57	52	47		56	51	47		55
10	66	56	49	45	65	55	49	45	54	49	45		53	48	45		53

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	42409	42409	42409
5°	41008	41074	41008
10°	37252	37207	37029
15°	31623	31510	31237
20°	25459	25132	24899
25°	19670	19090	19090
30°	14686	14179	14053
35°	10574	10440	10172
40°	7385	7586	7099
45°	5520	5830	5365
50°	4742	4742	4640
55°	4473	4282	4358
60°	4605	4166	4386
65°	4929	4151	4825
70°	5770	4360	5642
75°	7202	4575	7032
80°	9218	4925	8334
85°	7296	4780	7296

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 9218 cd/sqm

TEST NUMBER: P1250818

CATALOG NUMBER: P3A02R359030DE010 E3PHLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	17.2	10.7
10°-20°	38.3	24.0
20°-30°	36.6	22.9
30°-40°	24.6	15.4
40°-50°	14.4	9.0
50°-60°	10.3	6.4
60°-70°	8.6	5.4
70°-80°	7.1	4.4
80°-90°	2.9	1.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	92.1	57.6
0°-40°	116.7	72.9
0°-60°	141.5	88.4
0°-90°	160.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	160.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	193	193	193	193	193	
5°	186	187	187	186	186	17
15°	139	140	139	138	138	39
25°	81	80	79	79	79	37
35°	40	40	39	38	38	25
45°	18	18	19	18	17	14
55°	12	11	11	11	11	11
65°	10	8	8	8	9	9
75°	8	7	5	7	8	9
85°	3	3	2	3	3	3
90°	0	0	0	0	0	

TEST NUMBER: P1250818

CATALOG NUMBER: P3A02R359030DE010 E3PHLP1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	193.4	193.4	193.4	193.4	193.4
1°	193.1	193.4	193.4	193.1	193.1
2°	192.2	192.7	192.4	192.2	192.4
3°	190.9	191.4	191.2	190.9	190.7
4°	189.0	189.5	189.2	188.8	188.8
5°	186.3	186.8	186.6	186.3	186.3
6°	183.6	184.1	183.6	183.2	183.2
7°	180.0	180.7	180.2	179.7	179.5
8°	175.8	176.6	176.1	175.8	175.4
9°	171.7	172.2	171.5	171.5	171.5
10°	167.3	167.6	167.1	166.3	166.3
11°	162.5	162.2	162.0	161.5	161.0
12°	157.1	157.1	156.4	155.9	155.6
13°	151.5	151.2	150.8	150.3	150.3
14°	145.6	145.6	145.2	144.2	144.4
15°	139.3	139.6	138.8	137.9	137.6
17.5°	124.9	124.5	123.2	122.5	121.8
20°	109.1	108.9	107.7	106.9	106.7
22.5°	94.5	94.3	93.0	92.3	92.8
25°	81.3	80.4	78.9	78.9	78.9
27.5°	69.2	68.0	67.0	66.5	67.0
30°	58.0	57.0	56.0	55.8	55.5
32.5°	48.0	47.5	47.0	46.3	46.3
35°	39.5	39.5	39.0	38.2	38.0
37.5°	32.1	32.4	32.1	31.4	31.2
40°	25.8	26.3	26.5	25.8	24.8
42.5°	21.2	21.9	22.4	21.2	20.5
45°	17.8	18.3	18.8	17.8	17.3
47.5°	15.6	15.8	16.1	15.3	15.1
50°	13.9	13.9	13.9	13.6	13.6
52.5°	12.7	12.7	12.4	12.2	12.2
55°	11.7	11.4	11.2	11.2	11.4
57.5°	11.0	10.7	10.2	10.5	10.7
60°	10.5	10.0	9.5	9.7	10.0
62.5°	9.7	9.3	8.8	9.0	9.5
65°	9.5	8.5	8.0	8.5	9.3
67.5°	9.3	8.0	7.3	8.0	9.0
70°	9.0	7.6	6.8	7.6	8.8
72.5°	8.8	7.1	6.1	7.1	8.5
75°	8.5	6.6	5.4	6.6	8.3
77.5°	8.0	6.1	4.6	6.1	7.6
80°	7.3	5.6	3.9	5.4	6.6
82.5°	5.4	4.6	3.2	4.6	4.9
85°	2.9	3.2	1.9	3.2	2.9
87.5°	0.2	0.5	0.5	1.5	1.0



TEST NUMBER: P1250818
CATALOG NUMBER: P3A02R359030DE010 E3PHLP1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

IRiS

Report Number: SP1-2504-409-28

Test Date: 05/16/2025

Luminaire Tested: LD3A09R159030D010 E3D1H

Data in this report applies to families of products including LD3A

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2504-409-28
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 01/06/2026
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: IRiS
 Catalog Number: **LD3A09R159030D010 E3D1H**
 Description: 3in Adjustable LED luminaire with, R15 optic, 3000K CCT AND, 90CRI LEDS, E3D1H TRIM

Spectral Parameters

CCT (K): 3032
 CIE u' : 0.2493
 CIE v' : 0.5211
 Duv: 0.0003
 CIE x: 0.4351
 CIE y: 0.4042
 CIE z: 0.1608
 Peak Wavelength (nm): 615
 Dominant Wavelength (nm): 582
 Purity: 51.90029
 Rf: 91.6
 Rg: 98.2

CRI (Ra): 92.8
 R1: 93.5
 R2: 97.3
 R3: 98.7
 R4: 93.9
 R5: 93.6
 R6: 96.7
 R7: 90.3
 R8: 78.4
 R9: 51.3
 R10: 93.2
 R11: 96.4
 R12: 82.1
 R13: 94.8
 R14: 99.6
 R15: 87.6



Test Conditions

Stabilization Time: 40M
 Operation Time: 1H 40M
 Sphere Temperature (°C): 25.1

REPORT NUMBER: SP1-2504-409-28

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	12/16/2024	6/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2504-409-28

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



REPORT NUMBER: SP1-2504-409-28

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	285	NR	620	993	NR	750	55	NR	880	1	NR
365	0	NR	495	338	NR	625	970	NR	755	47	NR	885	1	NR
370	0	NR	500	392	NR	630	942	NR	760	41	NR	890	1	NR
375	0	NR	505	440	NR	635	902	NR	765	35	NR	895	1	NR
380	0	NR	510	478	NR	640	855	NR	770	30	NR	900	1	NR
385	0	NR	515	505	NR	645	800	NR	775	26	NR	905	1	NR
390	0	NR	520	524	NR	650	743	NR	780	22	NR	910	0	NR
395	1	NR	525	539	NR	655	682	NR	785	19	NR	915	0	NR
400	2	NR	530	554	NR	660	621	NR	790	16	NR	920	0	NR
405	3	NR	535	565	NR	665	563	NR	795	14	NR	925	1	NR
410	5	NR	540	581	NR	670	505	NR	800	12	NR	930	0	NR
415	10	NR	545	593	NR	675	451	NR	805	10	NR	935	0	NR
420	17	NR	550	606	NR	680	401	NR	810	9	NR	940	0	NR
425	32	NR	555	623	NR	685	356	NR	815	8	NR	945	0	NR
430	57	NR	560	645	NR	690	313	NR	820	7	NR	950	0	NR
435	103	NR	565	667	NR	695	274	NR	825	6	NR	955	0	NR
440	175	NR	570	699	NR	700	238	NR	830	5	NR	960	0	NR
445	287	NR	575	732	NR	705	208	NR	835	4	NR	965	0	NR
450	460	NR	580	774	NR	710	180	NR	840	4	NR	970	0	NR
455	550	NR	585	816	NR	715	157	NR	845	3	NR	975	0	NR
460	423	NR	590	862	NR	720	136	NR	850	3	NR	980	0	NR
465	309	NR	595	907	NR	725	117	NR	855	2	NR	985	0	NR
470	269	NR	600	943	NR	730	100	NR	860	2	NR	990	0	NR
475	229	NR	605	974	NR	735	86	NR	865	2	NR	995	0	NR
480	214	NR	610	991	NR	740	72	NR	870	2	NR	1000	0	NR
485	241	NR	615	1000	NR	745	62	NR	875	1	NR			

REPORT NUMBER: SP1-2504-409-28

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.44

λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)	λ (nm)	Power W ^λ /nm	Lumens (Φ/nm)
360	0	NR	490	285	NR	620	993	NR	750	55	NR	880	1	NR
365	0	NR	495	338	NR	625	970	NR	755	47	NR	885	1	NR
370	0	NR	500	392	NR	630	942	NR	760	41	NR	890	1	NR
375	0	NR	505	440	NR	635	902	NR	765	35	NR	895	1	NR
380	0	NR	510	478	NR	640	855	NR	770	30	NR	900	1	NR
385	0	NR	515	505	NR	645	800	NR	775	26	NR	905	1	NR
390	0	NR	520	524	NR	650	743	NR	780	22	NR	910	0	NR
395	1	NR	525	539	NR	655	682	NR	785	19	NR	915	0	NR
400	2	NR	530	554	NR	660	621	NR	790	16	NR	920	0	NR
405	3	NR	535	565	NR	665	563	NR	795	14	NR	925	1	NR
410	5	NR	540	581	NR	670	505	NR	800	12	NR	930	0	NR
415	10	NR	545	593	NR	675	451	NR	805	10	NR	935	0	NR
420	17	NR	550	606	NR	680	401	NR	810	9	NR	940	0	NR
425	32	NR	555	623	NR	685	356	NR	815	8	NR	945	0	NR
430	57	NR	560	645	NR	690	313	NR	820	7	NR	950	0	NR
435	103	NR	565	667	NR	695	274	NR	825	6	NR	955	0	NR
440	175	NR	570	699	NR	700	238	NR	830	5	NR	960	0	NR
445	287	NR	575	732	NR	705	208	NR	835	4	NR	965	0	NR
450	460	NR	580	774	NR	710	180	NR	840	4	NR	970	0	NR
455	550	NR	585	816	NR	715	157	NR	845	3	NR	975	0	NR
460	423	NR	590	862	NR	720	136	NR	850	3	NR	980	0	NR
465	309	NR	595	907	NR	725	117	NR	855	2	NR	985	0	NR
470	269	NR	600	943	NR	730	100	NR	860	2	NR	990	0	NR
475	229	NR	605	974	NR	735	86	NR	865	2	NR	995	0	NR
480	214	NR	610	991	NR	740	72	NR	870	2	NR	1000	0	NR
485	241	NR	615	1000	NR	745	62	NR	875	1	NR			

REPORT NUMBER: SP1-2504-409-28

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 2.84

λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	285	NR	620	993	NR	750	55	NR	880	1	NR
365	0	NR	495	338	NR	625	970	NR	755	47	NR	885	1	NR
370	0	NR	500	392	NR	630	942	NR	760	41	NR	890	1	NR
375	0	NR	505	440	NR	635	902	NR	765	35	NR	895	1	NR
380	0	NR	510	478	NR	640	855	NR	770	30	NR	900	1	NR
385	0	NR	515	505	NR	645	800	NR	775	26	NR	905	1	NR
390	0	NR	520	524	NR	650	743	NR	780	22	NR	910	0	NR
395	1	NR	525	539	NR	655	682	NR	785	19	NR	915	0	NR
400	2	NR	530	554	NR	660	621	NR	790	16	NR	920	0	NR
405	3	NR	535	565	NR	665	563	NR	795	14	NR	925	1	NR
410	5	NR	540	581	NR	670	505	NR	800	12	NR	930	0	NR
415	10	NR	545	593	NR	675	451	NR	805	10	NR	935	0	NR
420	17	NR	550	606	NR	680	401	NR	810	9	NR	940	0	NR
425	32	NR	555	623	NR	685	356	NR	815	8	NR	945	0	NR
430	57	NR	560	645	NR	690	313	NR	820	7	NR	950	0	NR
435	103	NR	565	667	NR	695	274	NR	825	6	NR	955	0	NR
440	175	NR	570	699	NR	700	238	NR	830	5	NR	960	0	NR
445	287	NR	575	732	NR	705	208	NR	835	4	NR	965	0	NR
450	460	NR	580	774	NR	710	180	NR	840	4	NR	970	0	NR
455	550	NR	585	816	NR	715	157	NR	845	3	NR	975	0	NR
460	423	NR	590	862	NR	720	136	NR	850	3	NR	980	0	NR
465	309	NR	595	907	NR	725	117	NR	855	2	NR	985	0	NR
470	269	NR	600	943	NR	730	100	NR	860	2	NR	990	0	NR
475	229	NR	605	974	NR	735	86	NR	865	2	NR	995	0	NR
480	214	NR	610	991	NR	740	72	NR	870	2	NR	1000	0	NR
485	241	NR	615	1000	NR	745	62	NR	875	1	NR			

REPORT NUMBER: SP1-2504-409-28

TM-30-18

Summary

$R_f = 91.6$
 $R_g = 98.2$
 $\text{CIE } R_a = 92.8$
 $R_9 = 51.3$



Color Vector Graphics



Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 86	CES26 = 96	CES51 = 97	CES76 = 92
CES02 = 63	CES27 = 91	CES52 = 99	CES77 = 88
CES03 = 32	CES28 = 98	CES53 = 98	CES78 = 88
CES04 = 70	CES29 = 97	CES54 = 93	CES79 = 91
CES05 = 50	CES30 = 90	CES55 = 91	CES80 = 92
CES06 = 51	CES31 = 97	CES56 = 94	CES81 = 78
CES07 = 43	CES32 = 93	CES57 = 93	CES82 = 96
CES08 = 42	CES33 = 97	CES58 = 94	CES83 = 95
CES09 = 29	CES34 = 97	CES59 = 97	CES84 = 95
CES10 = 76	CES35 = 98	CES60 = 93	CES85 = 80
CES11 = 59	CES36 = 82	CES61 = 93	CES86 = 79
CES12 = 65	CES37 = 98	CES62 = 87	CES87 = 91
CES13 = 44	CES38 = 86	CES63 = 94	CES88 = 95
CES14 = 74	CES39 = 98	CES64 = 92	CES89 = 84
CES15 = 72	CES40 = 97	CES65 = 89	CES90 = 94
CES16 = 48	CES41 = 96	CES66 = 90	CES91 = 77
CES17 = 50	CES42 = 97	CES67 = 89	CES92 = 76
CES18 = 57	CES43 = 96	CES68 = 91	CES93 = 86
CES19 = 72	CES44 = 99	CES69 = 92	CES94 = 76
CES20 = 67	CES45 = 99	CES70 = 89	CES95 = 83
CES21 = 86	CES46 = 96	CES71 = 85	CES96 = 91
CES22 = 79	CES47 = 93	CES72 = 95	CES97 = 96
CES23 = 92	CES48 = 89	CES73 = 85	CES98 = 93
CES24 = 90	CES49 = 97	CES74 = 90	CES99 = 89
CES25 = 72	CES50 = 97	CES75 = 86	



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)