

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251182

Luminaire Tested: P3A05R309030DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1251182
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R309030DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R30 optic, 3000K CCT AND, 90CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 530.0 lumens
Efficiency: N/A
Efficacy: 73.6 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1251182
CATALOG NUMBER: P3A05R309030DE010 E3DL1WMH

Luminous Intensity Polar Plot

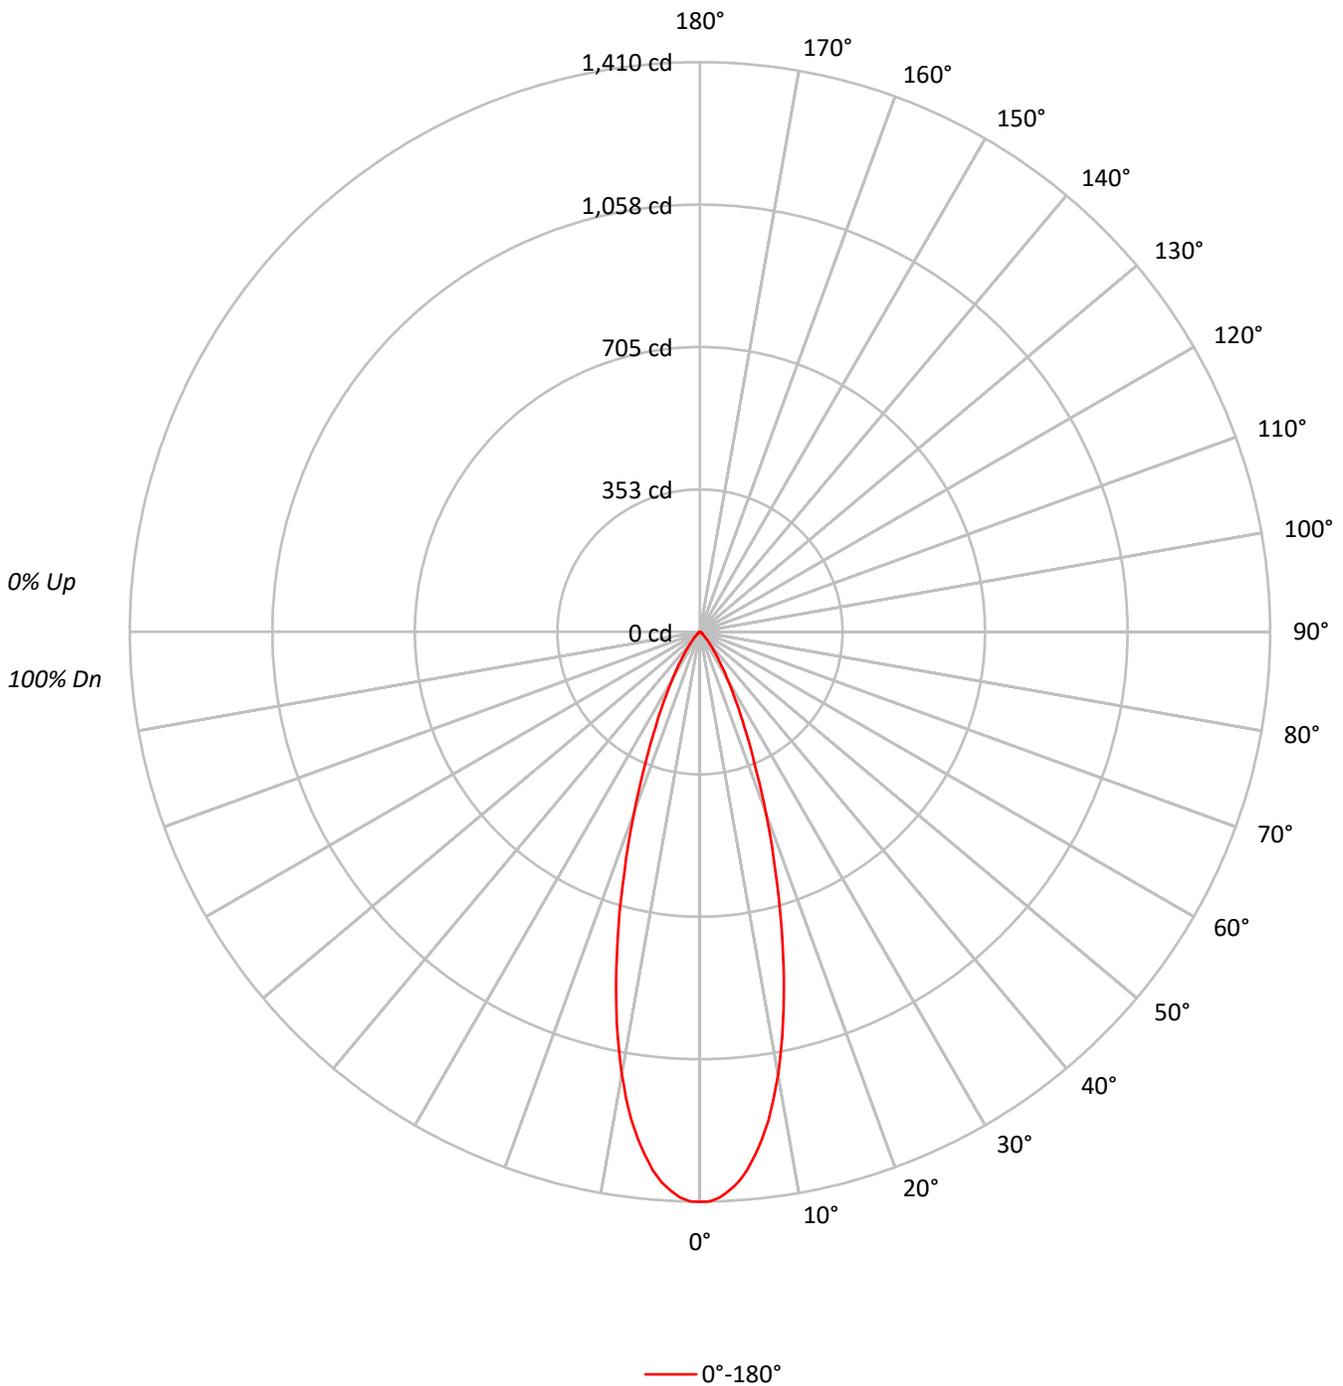



TEST NUMBER: P1251182
 CATALOG NUMBER: P3A05R309030DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20					
RC	80				70				50				30				10			0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	97	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	93	92	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	91	89	87	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	91	89	87	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	88	85	83	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	85	82	79	78
6	94	86	81	78	92	85	81	77	84	80	77	83	79	76	81	78	76	75	81	78	76	75
7	90	82	77	74	89	82	77	74	81	76	73	80	76	73	79	75	73	71	79	75	73	71
8	87	79	74	71	86	79	74	71	78	73	70	77	73	70	76	72	70	69	76	72	70	69
9	84	76	71	68	83	75	71	68	75	70	67	74	70	67	73	70	67	66	73	70	67	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	63	71	67	65	63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	309273
5°	294364
10°	247602
15°	178571
20°	110750
25°	62979
30°	34993
35°	19033
40°	10019
45°	5427
50°	2900
55°	1912
60°	1754
65°	1816
70°	1603
75°	1271
80°	1263
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5427 cd/sqm



TEST NUMBER: P1251182
 CATALOG NUMBER: P3A05R309030DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.4	22.7
10°-20°	214.0	40.4
20°-30°	123.7	23.3
30°-40°	46.9	8.9
40°-50°	14.4	2.7
50°-60°	4.8	0.9
60°-70°	3.3	0.6
70°-80°	1.8	0.3
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	458.2	86.5
0°-40°	505.1	95.3
0°-60°	524.4	98.9
0°-90°	530.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	530.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1410	
5°	1337	120
15°	787	214
25°	260	124
35°	71	47
45°	18	14
55°	5	5
65°	4	3
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1251182
CATALOG NUMBER: P3A05R309030DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1410.4
1°	1409.4
2°	1400.9
3°	1384.9
4°	1364.8
5°	1337.3
6°	1302.2
7°	1263.2
8°	1219.6
9°	1167.6
10°	1112.0
11°	1051.9
12°	988.3
13°	921.7
14°	854.1
15°	786.6
17.5°	620.3
20°	474.6
22.5°	352.0
25°	260.3
27.5°	189.3
30°	138.2
32.5°	99.6
35°	71.1
37.5°	49.6
40°	35.0
42.5°	24.5
45°	17.5
47.5°	12.0
50°	8.5
52.5°	6.0
55°	5.0
57.5°	4.5
60°	4.0
62.5°	3.5
65°	3.5
67.5°	3.0
70°	2.5
72.5°	2.0
75°	1.5
77.5°	1.5
80°	1.0
82.5°	1.0
85°	0.5
87.5°	0.0



TEST NUMBER: P1251182
CATALOG NUMBER: P3A05R309030DE010 E3DL1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

IRiS

Report Number: SP1-2504-409-28

Test Date: 05/16/2025

Luminaire Tested: LD3A09R159030D010 E3D1H

Data in this report applies to families of products including LD3A


Test Information

Test Method: LM-79-2019
 Report Number: SP1-2504-409-28
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 01/06/2026
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: IRiS
 Catalog Number: **LD3A09R159030D010 E3D1H**
 Description: 3in Adjustabled LED luminaire with, R15 optic, 3000K CCT AND, 90CRI LEDS, E3D1H TRIM

Spectral Parameters

CCT (K): 3032
 CIE u': 0.2493
 CIE v': 0.5211
 Duv: 0.0003
 CIE x: 0.4351
 CIE y: 0.4042
 CIE z: 0.1608
 Peak Wavelength (nm): 615
 Dominant Wavelength (nm): 582
 Purity: 51.90029
 Rf: 91.6
 Rg: 98.2

CRI (Ra):	92.8		
R1:	93.5	R9:	51.3
R2:	97.3	R10:	93.2
R3:	98.7	R11:	96.4
R4:	93.9	R12:	82.1
R5:	93.6	R13:	94.8
R6:	96.7	R14:	99.6
R7:	90.3	R15:	87.6
R8:	78.4		

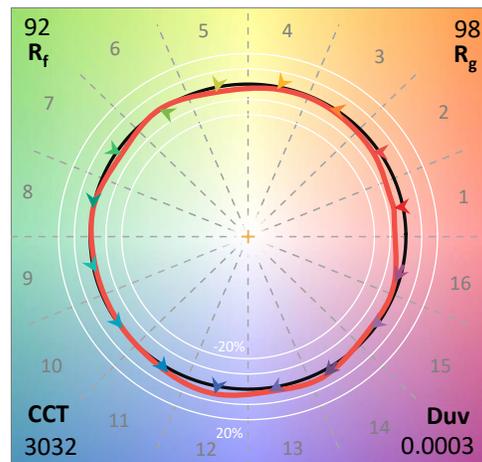

Test Conditions


Stabilization Time: 40M
 Operation Time: 1H 40M
 Sphere Temperature (°C): 25.1

REPORT NUMBER: SP1-2504-409-28


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	12/16/2024	6/16/2025
Power Meter	XITRON INXT2011004	1/21/2025	1/21/2026
AC Power Source	CHROMA 61603 IN0063	10/22/2024	10/22/2025
DC Power Source	AGILENT E3634A IN0208	10/22/2024	10/22/2025
Sphere Thermometer	ONSET IN0085	10/22/2024	10/22/2025
Room Thermometer	ONSET IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2504-409-28

CIE 1931 Chromaticity Diagram

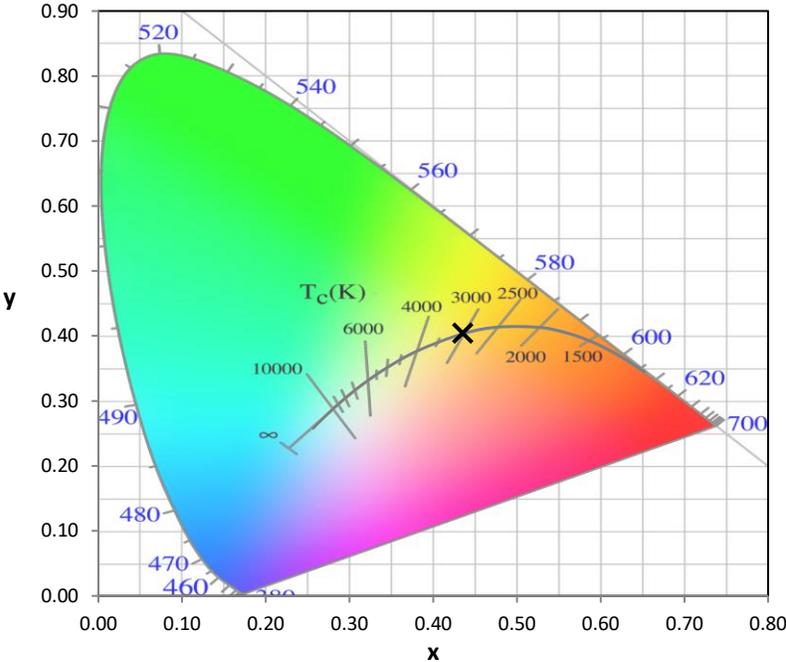


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

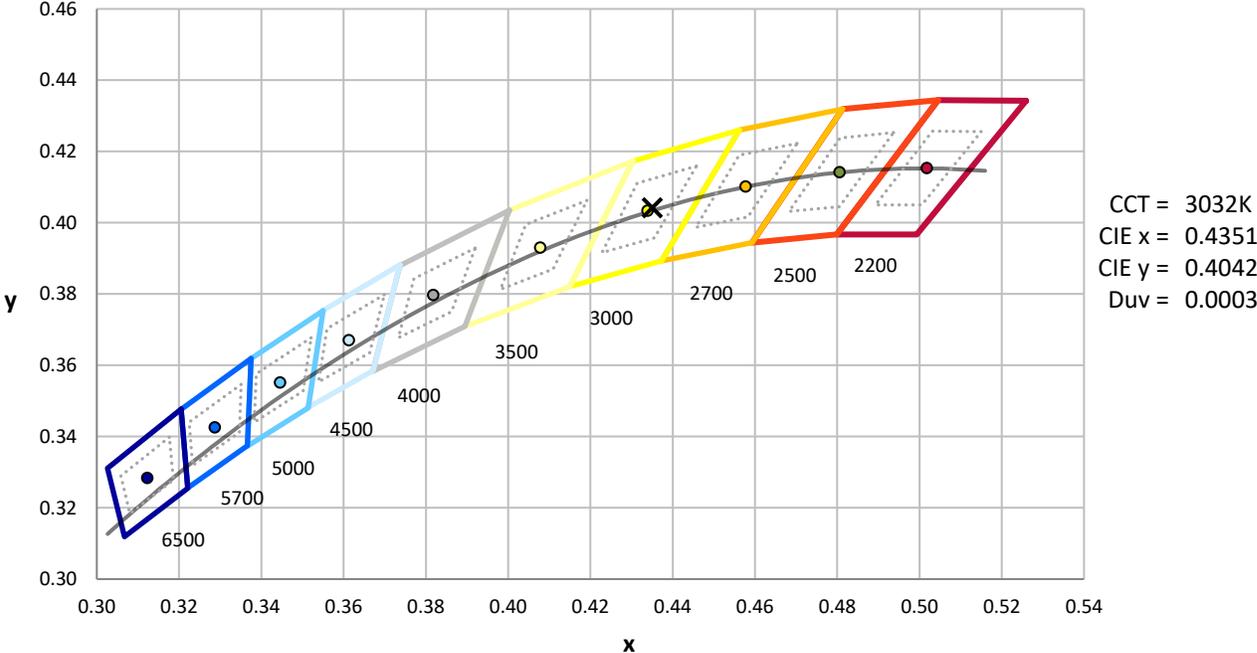

Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-2504-409-28

Photopic Flux vs. Wavelength

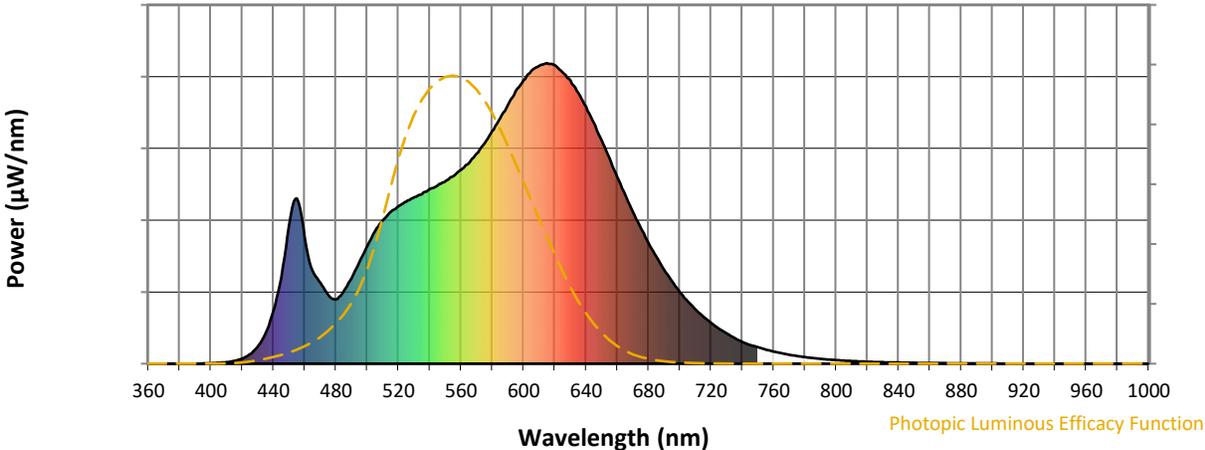


Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)
360	0	NR	490	285	NR	620	993	NR	750	55	NR	880	1	NR
365	0	NR	495	338	NR	625	970	NR	755	47	NR	885	1	NR
370	0	NR	500	392	NR	630	942	NR	760	41	NR	890	1	NR
375	0	NR	505	440	NR	635	902	NR	765	35	NR	895	1	NR
380	0	NR	510	478	NR	640	855	NR	770	30	NR	900	1	NR
385	0	NR	515	505	NR	645	800	NR	775	26	NR	905	1	NR
390	0	NR	520	524	NR	650	743	NR	780	22	NR	910	0	NR
395	1	NR	525	539	NR	655	682	NR	785	19	NR	915	0	NR
400	2	NR	530	554	NR	660	621	NR	790	16	NR	920	0	NR
405	3	NR	535	565	NR	665	563	NR	795	14	NR	925	1	NR
410	5	NR	540	581	NR	670	505	NR	800	12	NR	930	0	NR
415	10	NR	545	593	NR	675	451	NR	805	10	NR	935	0	NR
420	17	NR	550	606	NR	680	401	NR	810	9	NR	940	0	NR
425	32	NR	555	623	NR	685	356	NR	815	8	NR	945	0	NR
430	57	NR	560	645	NR	690	313	NR	820	7	NR	950	0	NR
435	103	NR	565	667	NR	695	274	NR	825	6	NR	955	0	NR
440	175	NR	570	699	NR	700	238	NR	830	5	NR	960	0	NR
445	287	NR	575	732	NR	705	208	NR	835	4	NR	965	0	NR
450	460	NR	580	774	NR	710	180	NR	840	4	NR	970	0	NR
455	550	NR	585	816	NR	715	157	NR	845	3	NR	975	0	NR
460	423	NR	590	862	NR	720	136	NR	850	3	NR	980	0	NR
465	309	NR	595	907	NR	725	117	NR	855	2	NR	985	0	NR
470	269	NR	600	943	NR	730	100	NR	860	2	NR	990	0	NR
475	229	NR	605	974	NR	735	86	NR	865	2	NR	995	0	NR
480	214	NR	610	991	NR	740	72	NR	870	2	NR	1000	0	NR
485	241	NR	615	1000	NR	745	62	NR	875	1	NR			

REPORT NUMBER: SP1-2504-409-28

Scotopic Flux vs. Wavelength

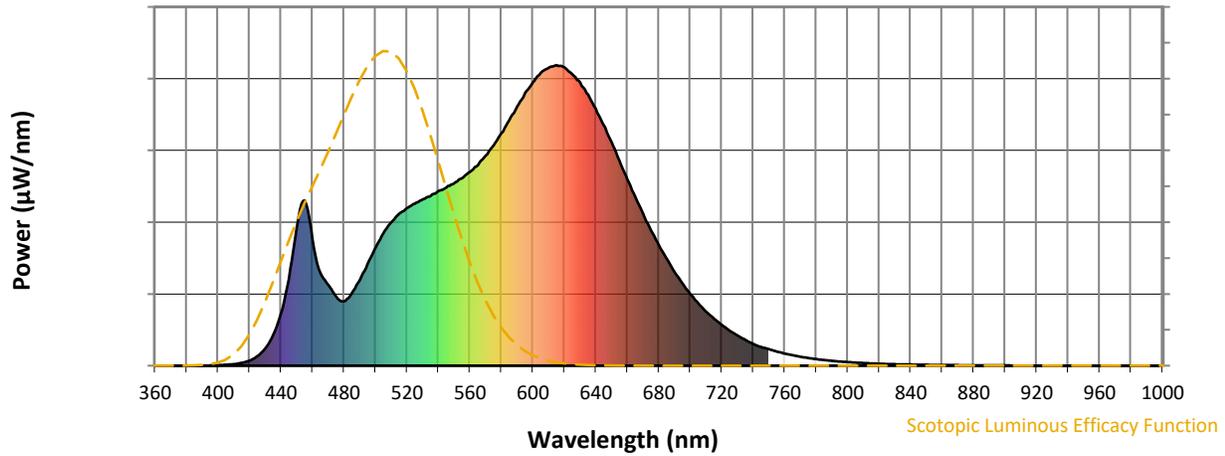


Scotopic Lumens: NR

S/P: 1.44

λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)
360	0	NR	490	285	NR	620	993	NR	750	55	NR	880	1	NR
365	0	NR	495	338	NR	625	970	NR	755	47	NR	885	1	NR
370	0	NR	500	392	NR	630	942	NR	760	41	NR	890	1	NR
375	0	NR	505	440	NR	635	902	NR	765	35	NR	895	1	NR
380	0	NR	510	478	NR	640	855	NR	770	30	NR	900	1	NR
385	0	NR	515	505	NR	645	800	NR	775	26	NR	905	1	NR
390	0	NR	520	524	NR	650	743	NR	780	22	NR	910	0	NR
395	1	NR	525	539	NR	655	682	NR	785	19	NR	915	0	NR
400	2	NR	530	554	NR	660	621	NR	790	16	NR	920	0	NR
405	3	NR	535	565	NR	665	563	NR	795	14	NR	925	1	NR
410	5	NR	540	581	NR	670	505	NR	800	12	NR	930	0	NR
415	10	NR	545	593	NR	675	451	NR	805	10	NR	935	0	NR
420	17	NR	550	606	NR	680	401	NR	810	9	NR	940	0	NR
425	32	NR	555	623	NR	685	356	NR	815	8	NR	945	0	NR
430	57	NR	560	645	NR	690	313	NR	820	7	NR	950	0	NR
435	103	NR	565	667	NR	695	274	NR	825	6	NR	955	0	NR
440	175	NR	570	699	NR	700	238	NR	830	5	NR	960	0	NR
445	287	NR	575	732	NR	705	208	NR	835	4	NR	965	0	NR
450	460	NR	580	774	NR	710	180	NR	840	4	NR	970	0	NR
455	550	NR	585	816	NR	715	157	NR	845	3	NR	975	0	NR
460	423	NR	590	862	NR	720	136	NR	850	3	NR	980	0	NR
465	309	NR	595	907	NR	725	117	NR	855	2	NR	985	0	NR
470	269	NR	600	943	NR	730	100	NR	860	2	NR	990	0	NR
475	229	NR	605	974	NR	735	86	NR	865	2	NR	995	0	NR
480	214	NR	610	991	NR	740	72	NR	870	2	NR	1000	0	NR
485	241	NR	615	1000	NR	745	62	NR	875	1	NR			

REPORT NUMBER: SP1-2504-409-28

Melanopic Flux vs. Wavelength

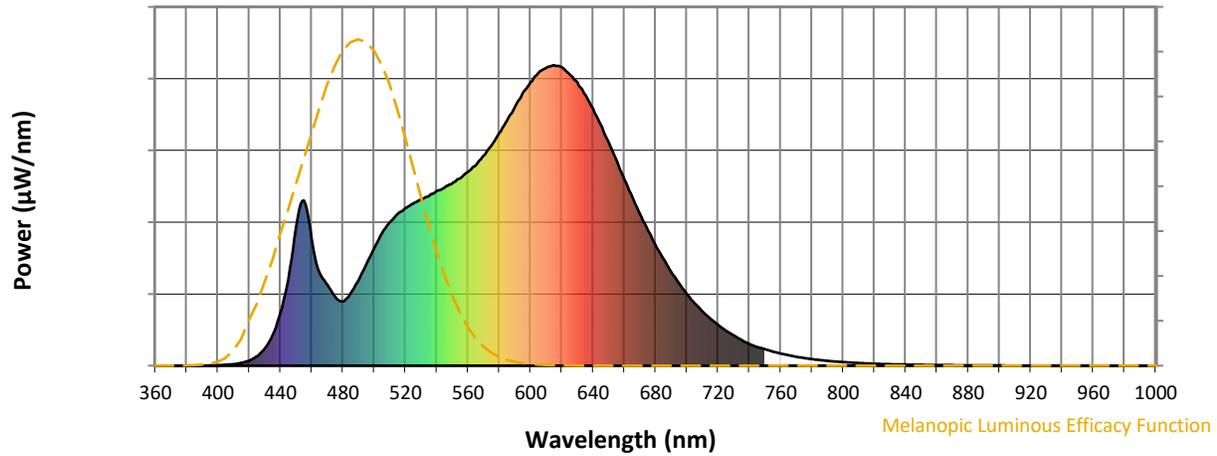


Melanopic Lumens: NR

M/P: 2.84





λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	285	NR	620	993	NR	750	55	NR	880	1	NR
365	0	NR	495	338	NR	625	970	NR	755	47	NR	885	1	NR
370	0	NR	500	392	NR	630	942	NR	760	41	NR	890	1	NR
375	0	NR	505	440	NR	635	902	NR	765	35	NR	895	1	NR
380	0	NR	510	478	NR	640	855	NR	770	30	NR	900	1	NR
385	0	NR	515	505	NR	645	800	NR	775	26	NR	905	1	NR
390	0	NR	520	524	NR	650	743	NR	780	22	NR	910	0	NR
395	1	NR	525	539	NR	655	682	NR	785	19	NR	915	0	NR
400	2	NR	530	554	NR	660	621	NR	790	16	NR	920	0	NR
405	3	NR	535	565	NR	665	563	NR	795	14	NR	925	1	NR
410	5	NR	540	581	NR	670	505	NR	800	12	NR	930	0	NR
415	10	NR	545	593	NR	675	451	NR	805	10	NR	935	0	NR
420	17	NR	550	606	NR	680	401	NR	810	9	NR	940	0	NR
425	32	NR	555	623	NR	685	356	NR	815	8	NR	945	0	NR
430	57	NR	560	645	NR	690	313	NR	820	7	NR	950	0	NR
435	103	NR	565	667	NR	695	274	NR	825	6	NR	955	0	NR
440	175	NR	570	699	NR	700	238	NR	830	5	NR	960	0	NR
445	287	NR	575	732	NR	705	208	NR	835	4	NR	965	0	NR
450	460	NR	580	774	NR	710	180	NR	840	4	NR	970	0	NR
455	550	NR	585	816	NR	715	157	NR	845	3	NR	975	0	NR
460	423	NR	590	862	NR	720	136	NR	850	3	NR	980	0	NR
465	309	NR	595	907	NR	725	117	NR	855	2	NR	985	0	NR
470	269	NR	600	943	NR	730	100	NR	860	2	NR	990	0	NR
475	229	NR	605	974	NR	735	86	NR	865	2	NR	995	0	NR
480	214	NR	610	991	NR	740	72	NR	870	2	NR	1000	0	NR
485	241	NR	615	1000	NR	745	62	NR	875	1	NR			

Summary

$R_f = 91.6$
 $R_g = 98.2$
 $CIE R_a = 92.8$
 $R_9 = 51.3$

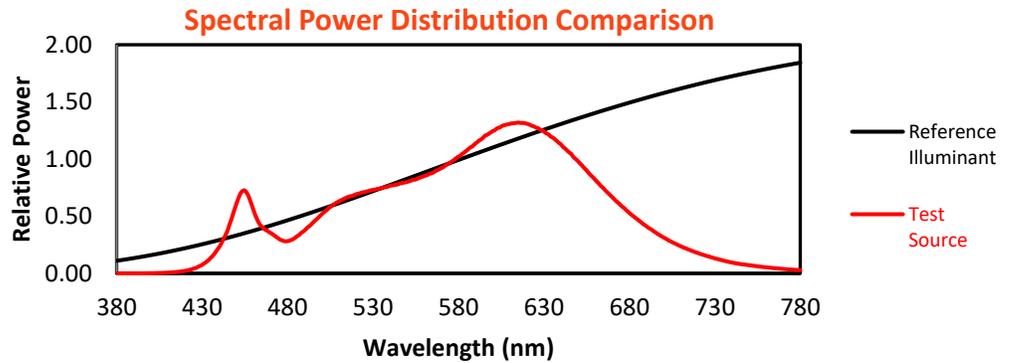


Color Vector Graphics

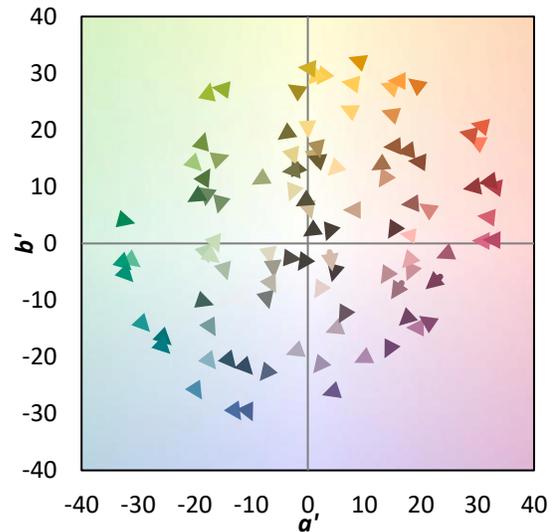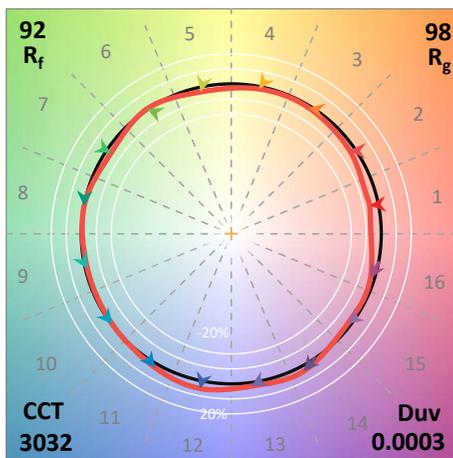
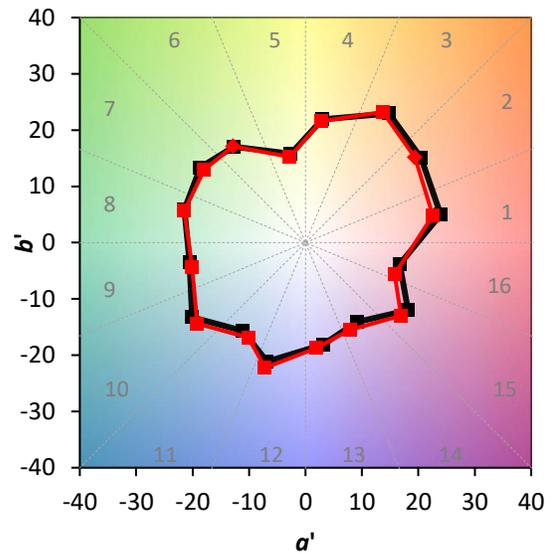
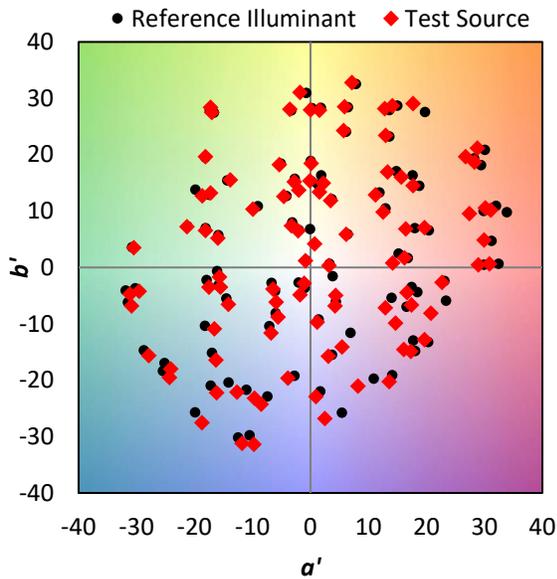


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 86	CES26 = 96	CES51 = 97	CES76 = 92
CES02 = 63	CES27 = 91	CES52 = 99	CES77 = 88
CES03 = 32	CES28 = 98	CES53 = 98	CES78 = 88
CES04 = 70	CES29 = 97	CES54 = 93	CES79 = 91
CES05 = 50	CES30 = 90	CES55 = 91	CES80 = 92
CES06 = 51	CES31 = 97	CES56 = 94	CES81 = 78
CES07 = 43	CES32 = 93	CES57 = 93	CES82 = 96
CES08 = 42	CES33 = 97	CES58 = 94	CES83 = 95
CES09 = 29	CES34 = 97	CES59 = 97	CES84 = 95
CES10 = 76	CES35 = 98	CES60 = 93	CES85 = 80
CES11 = 59	CES36 = 82	CES61 = 93	CES86 = 79
CES12 = 65	CES37 = 98	CES62 = 87	CES87 = 91
CES13 = 44	CES38 = 86	CES63 = 94	CES88 = 95
CES14 = 74	CES39 = 98	CES64 = 92	CES89 = 84
CES15 = 72	CES40 = 97	CES65 = 89	CES90 = 94
CES16 = 48	CES41 = 96	CES66 = 90	CES91 = 77
CES17 = 50	CES42 = 97	CES67 = 89	CES92 = 76
CES18 = 57	CES43 = 96	CES68 = 91	CES93 = 86
CES19 = 72	CES44 = 99	CES69 = 92	CES94 = 76
CES20 = 67	CES45 = 99	CES70 = 89	CES95 = 83
CES21 = 86	CES46 = 96	CES71 = 85	CES96 = 91
CES22 = 79	CES47 = 93	CES72 = 95	CES97 = 96
CES23 = 92	CES48 = 89	CES73 = 85	CES98 = 93
CES24 = 90	CES49 = 97	CES74 = 90	CES99 = 89
CES25 = 72	CES50 = 97	CES75 = 86	

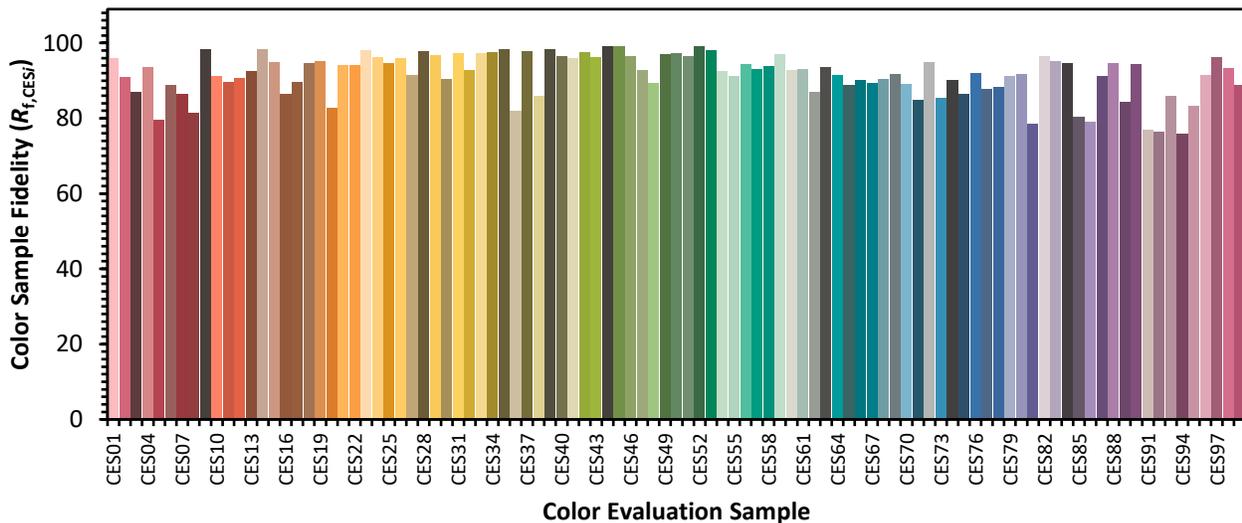

Color Rendition by Hue-Angle Bin

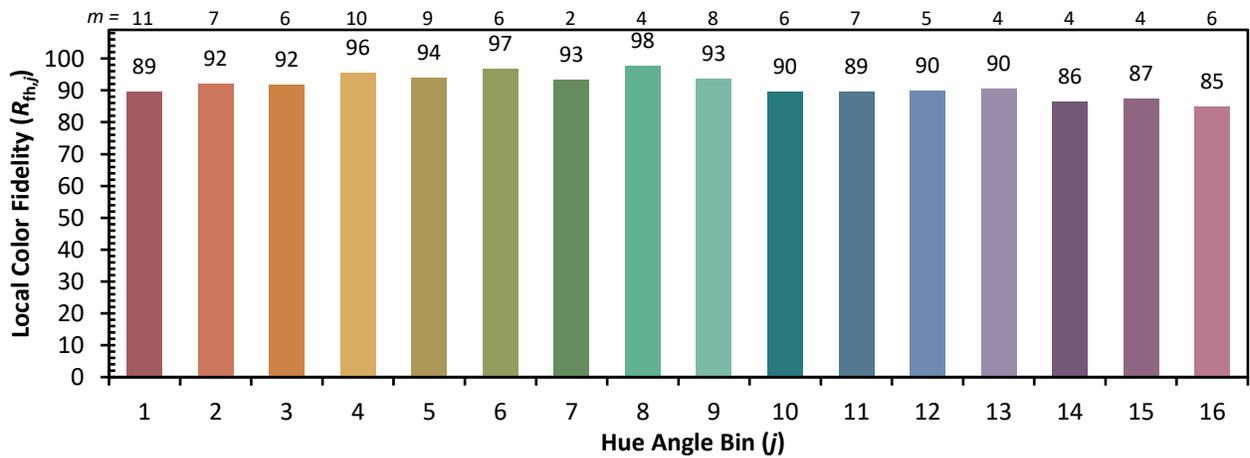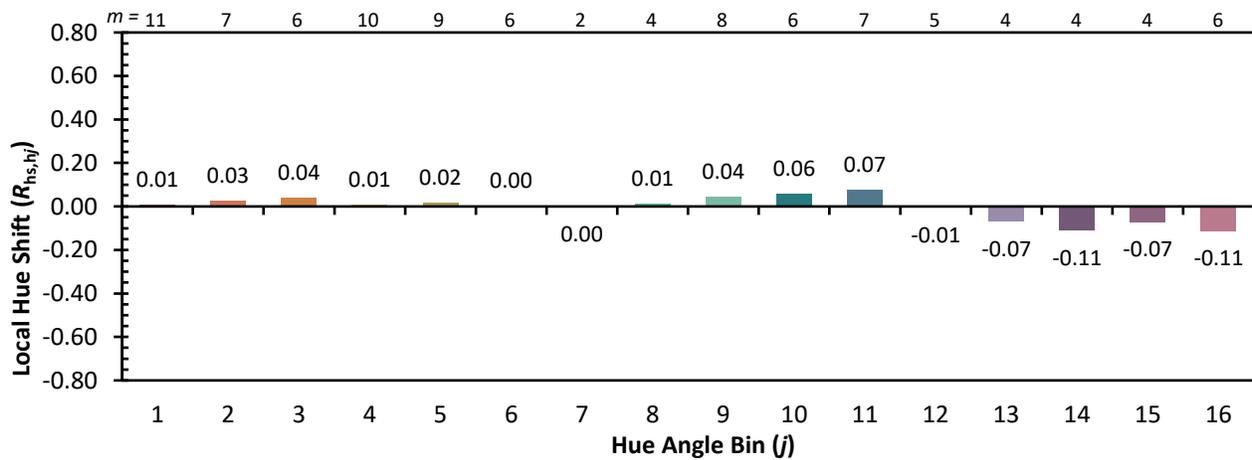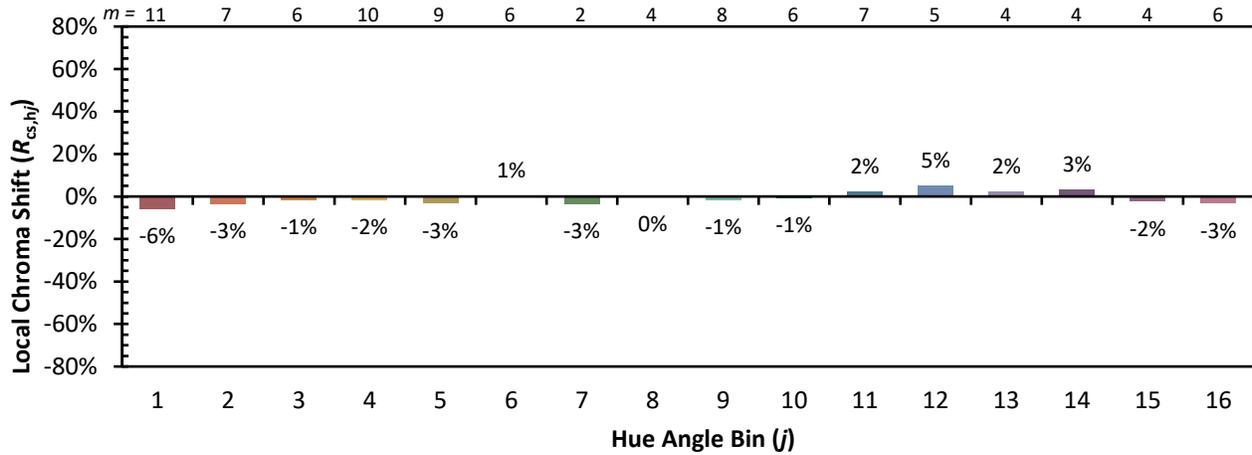

Measure Comparisons

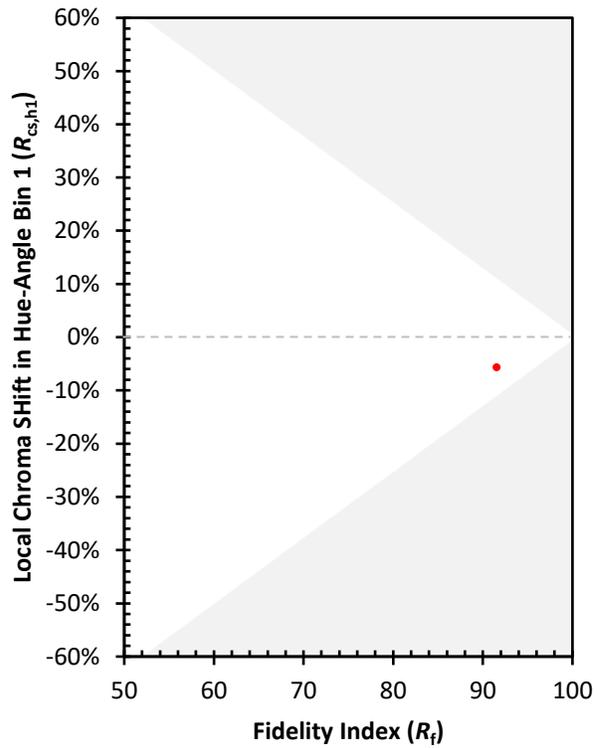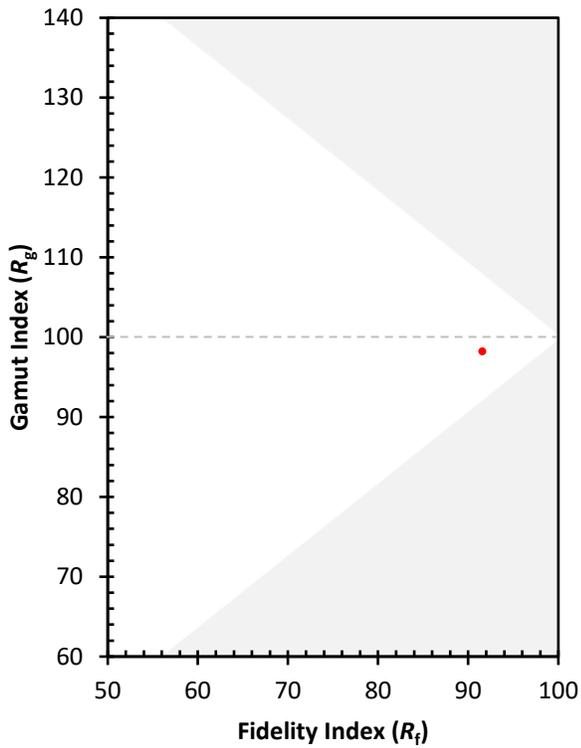

(END OF REPORT)